


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.12V I:0.1059A P:11.614W PF:0.4981 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:817.445x1 lm


NAME: DDW31-LM13E-230BWT	TYPE: recessed luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 70.39 lm/W
MODEL		Imax(cd)	4752	S/MH(C0/180)	0.38	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.32	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	817.45	η UP, DN(C0-180)	0.0, 60.5	
NOMINAL FLUX(lm)	817.445	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 39.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

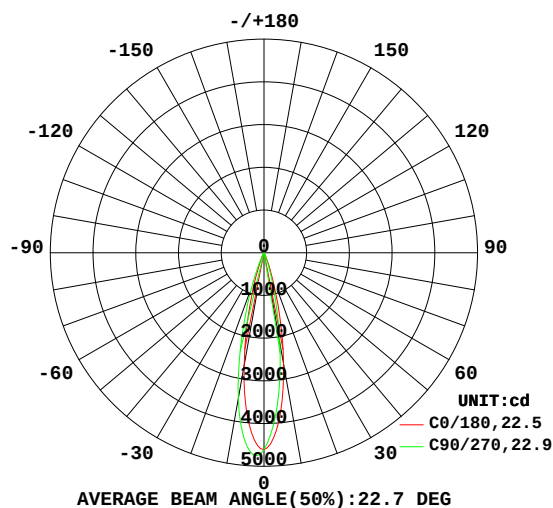

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

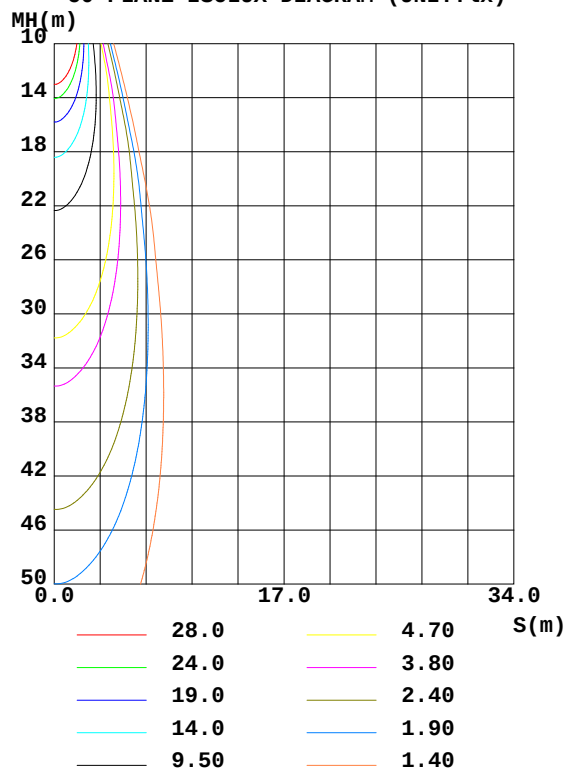

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	2696	3328	3467	3288	2649	2188	2151	2256	0- 10	343.8	343.8	42.1
20	435.0	698.4	789.9	695.6	408.7	288.9	290.0	310.6	10- 20	379.5	723.3	88.5
30	47.51	69.69	76.24	66.17	42.80	32.91	33.75	35.99	20- 30	81.49	804.8	98.5
40	2.887	4.051	3.832	3.319	2.264	1.830	2.005	2.164	30- 40	11.53	816.3	99.9
50	0.3078	0.3724	0.3619	0.3631	0.2810	0.2078	0.2270	0.2511	40- 50	0.8005	817.1	100
60	0.0095	0.0091	0.0082	0.0079	0.1726	0.1891	0.1886	0.1915	50- 60	0.0983	817.2	100
70	0.0062	0.0068	0.0082	0.0073	0.1941	0.2235	0.2157	0.2130	60- 70	0.0831	817.3	100
80	0.0033	0.0030	0.0043	0.0039	0.3601	0.1760	0.1783	0.1782	70- 80	0.1031	817.4	100
90	0	0	0	0	0	0	0	0	80- 90	0.0114	817.4	100
100	0	0	0	0	0	0	0	0	90-100	0	817.4	100
110	0	0	0	0	0	0	0	0	100-110	0	817.4	100
120	0	0	0	0	0	0	0	0	110-120	0	817.4	100
130	0	0	0	0	0	0	0	0	120-130	0	817.4	100
140	0	0	0	0	0	0	0	0	130-140	0	817.4	100
150	0	0	0	0	0	0	0	0	140-150	0	817.4	100
160	0	0	0	0	0	0	0	0	150-160	0	817.4	100
170	0	0	0	0	0	0	0	0	160-170	0	817.4	100
180	0	0	0	0	0	0	0	0	170-180	0	817.4	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 816.92 lm

%lum = 99.9%

%lamp = 99.9%

Conical surface Flux(120deg): 817.25 lm


%lum = 100.0%

%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

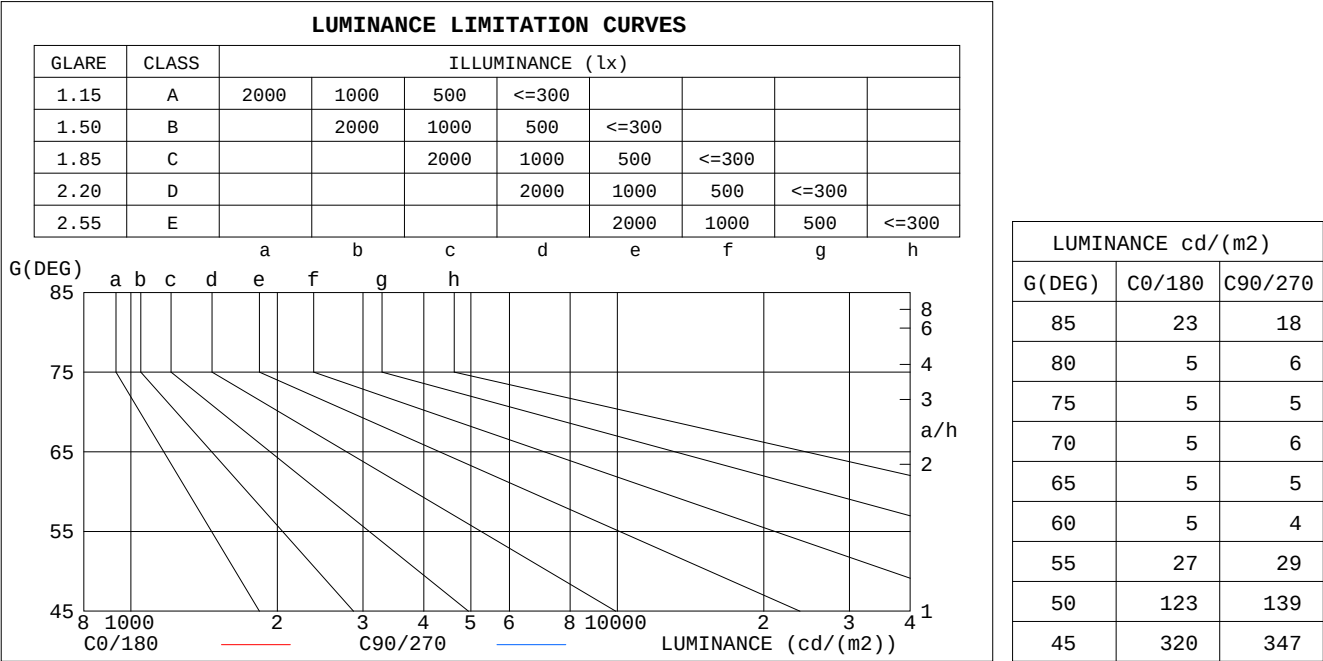


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	.00	.99	.97
2.0	1.09	1.06	1.04	1.07	1.05	1.02	1.04	1.02	1.00	1.01	.00	.98	.98	.97	.96	.95
3.0	1.05	1.01	.99	1.03	1.00	.98	1.01	.98	.96	.99	.97	.95	.97	.95	.94	.92
4.0	1.01	.97	.95	.00	.97	.94	.98	.95	.93	.96	.94	.92	.95	.93	.91	.90
5.0	.98	.94	.91	.97	.94	.91	.95	.93	.90	.94	.91	.90	.93	.91	.89	.88
6.0	.95	.91	.89	.94	.91	.88	.93	.90	.88	.92	.89	.87	.91	.88	.87	.86
7.0	.92	.89	.86	.92	.88	.86	.91	.88	.85	.90	.87	.85	.89	.86	.85	.84
8.0	.90	.86	.84	.90	.86	.84	.89	.86	.83	.88	.85	.83	.87	.85	.83	.82
9.0	.88	.84	.82	.87	.84	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.80
10.0	.86	.82	.80	.85	.82	.80	.85	.82	.80	.84	.81	.79	.84	.81	.79	.78

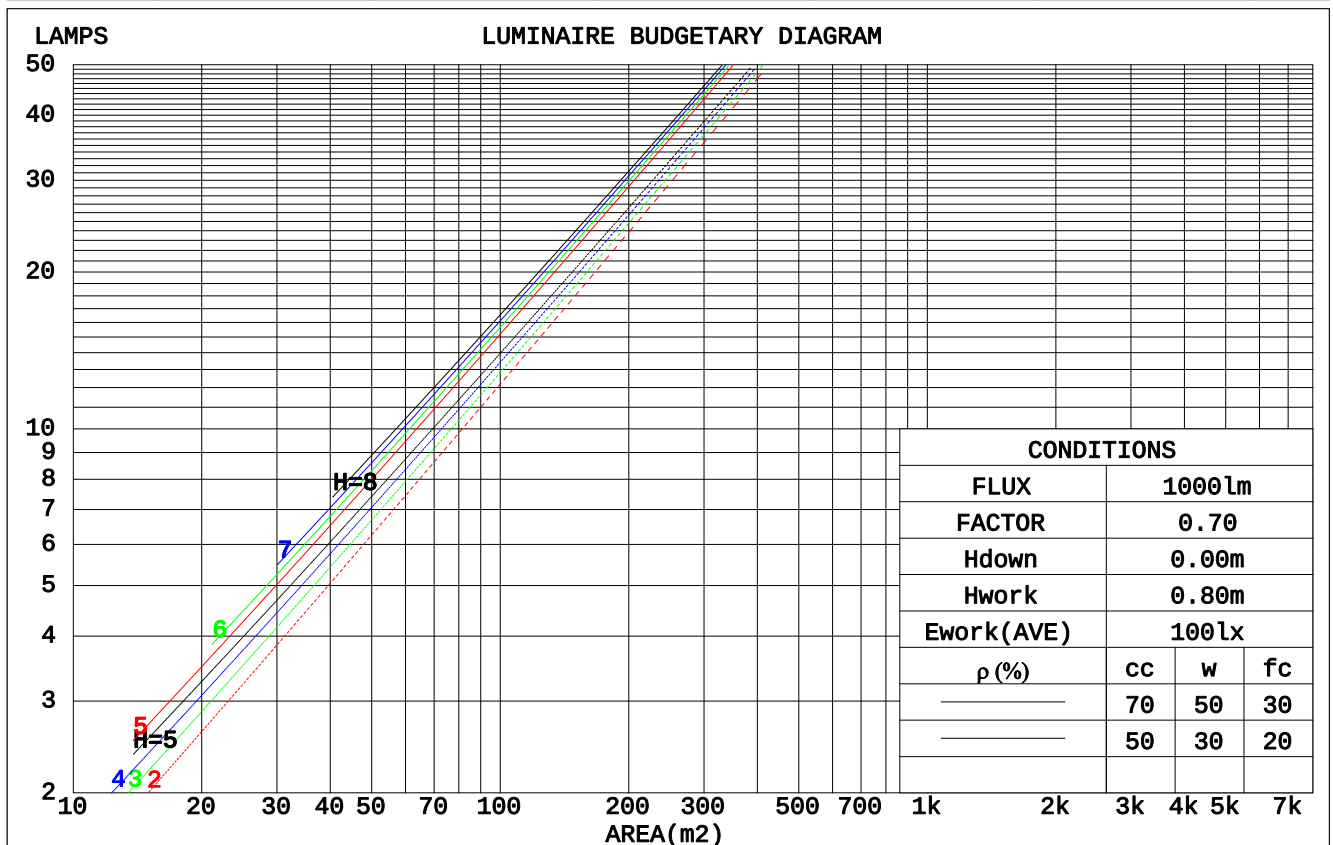

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{FC}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.128	.073	.023	.121	.069	.022	.109	.062	.020	.097	.056	.018	.087	.050	.016		
2.0	.117	.064	.020	.112	.062	.019	.102	.057	.018	.092	.052	.016	.084	.047	.015		
3.0	.108	.058	.017	.104	.056	.017	.096	.052	.016	.088	.048	.015	.081	.045	.014		
4.0	.101	.053	.015	.097	.051	.015	.090	.048	.014	.084	.045	.014	.078	.042	.013		
5.0	.095	.048	.014	.092	.047	.014	.086	.045	.013	.080	.042	.013	.075	.040	.012		
6.0	.090	.045	.013	.087	.044	.013	.082	.042	.012	.077	.040	.012	.072	.038	.011		
7.0	.085	.042	.012	.083	.041	.012	.078	.039	.011	.074	.038	.011	.070	.036	.011		
8.0	.081	.039	.011	.079	.039	.011	.075	.037	.011	.071	.036	.010	.068	.035	.010		
9.0	.077	.037	.010	.075	.037	.010	.072	.036	.010	.069	.034	.010	.066	.033	.010		
10.0	.074	.035	.010	.072	.035	.010	.069	.034	.010	.066	.033	.009	.064	.032	.009		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.143	.135	.128	.098	.093	.089	.056	.054	.051	.018	.017	.017	
2.0	.149	.133	.119	.128	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.097	.114	.098	.084	.078	.068	.059	.045	.040	.035	.015	.013	.011	
4.0	.120	.098	.080	.103	.084	.070	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.109	.085	.067	.094	.074	.059	.065	.051	.041	.038	.030	.025	.012	.010	.008	
6.0	.100	.075	.057	.086	.065	.050	.059	.046	.035	.034	.027	.021	.011	.009	.007	
7.0	.092	.067	.049	.079	.058	.042	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.086	.060	.042	.074	.052	.037	.051	.036	.026	.030	.021	.016	.010	.007	.005	
9.0	.080	.054	.037	.069	.047	.032	.048	.033	.023	.028	.019	.014	.009	.006	.004	
10.0	.075	.049	.032	.065	.043	.028	.045	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.2	1.8	1.4	1.9	2.0	2.6	3.2	2.8	3.3	3.5
3H	1.0	1.6	1.3	1.8	1.9	2.5	3.0	2.7	3.2	3.4
4H	0.9	1.5	1.2	1.7	1.9	2.4	2.9	2.6	3.1	3.3
6H	0.9	1.4	1.1	1.6	1.8	2.3	2.8	2.6	3.0	3.3
8H	0.8	1.3	1.1	1.5	1.8	2.3	2.7	2.6	3.0	3.2
12H	0.8	1.2	1.1	1.5	1.8	2.2	2.7	2.5	2.9	3.2
4H 2H	0.9	1.5	1.2	1.7	1.9	2.4	2.9	2.6	3.1	3.3
3H	0.8	1.2	1.1	1.5	1.8	2.2	2.7	2.5	2.9	3.2
4H	0.7	1.1	1.0	1.4	1.7	2.1	2.5	2.5	2.8	3.1
6H	0.6	1.0	0.9	1.3	1.6	2.0	2.4	2.4	2.7	3.1
8H	0.5	0.9	0.9	1.2	1.6	2.0	2.3	2.3	2.7	3.0
12H	0.5	0.8	0.9	1.2	1.5	1.9	2.2	2.3	2.6	3.0
8H 4H	0.5	0.9	0.9	1.2	1.6	2.0	2.3	2.3	2.7	3.0
6H	0.4	0.7	0.8	1.1	1.5	1.8	2.1	2.3	2.5	2.9
8H	0.3	0.6	0.8	1.0	1.5	1.8	2.0	2.2	2.5	2.9
12H	0.3	0.5	0.7	0.9	1.4	1.7	1.9	2.2	2.4	2.8
12H 4H	0.5	0.8	0.9	1.2	1.5	1.9	2.2	2.3	2.6	3.0
6H	0.3	0.6	0.8	1.0	1.5	1.8	2.0	2.2	2.5	2.9
8H	0.3	0.5	0.7	0.9	1.4	1.7	1.9	2.2	2.4	2.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.5 / -25.5					+ 5.4 / -26.3				
1.5H	+ 7.2 / -20.5					+ 8.1 / -21.8				
2.0H	+ 6.8 / -15.8					+ 7.2 / -15.6				

CIE Pub.117, 817.4 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.7$)
Area: 0.004 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	92	86	83	91	86	82	90	85	82	79
0.80	98	93	90	98	93	90	97	92	90	86
1.00	102	97	94	101	97	94	100	96	93	90
1.25	105	101	98	105	100	98	103	99	97	93
1.50	108	104	101	107	103	100	105	102	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	105	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	108	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

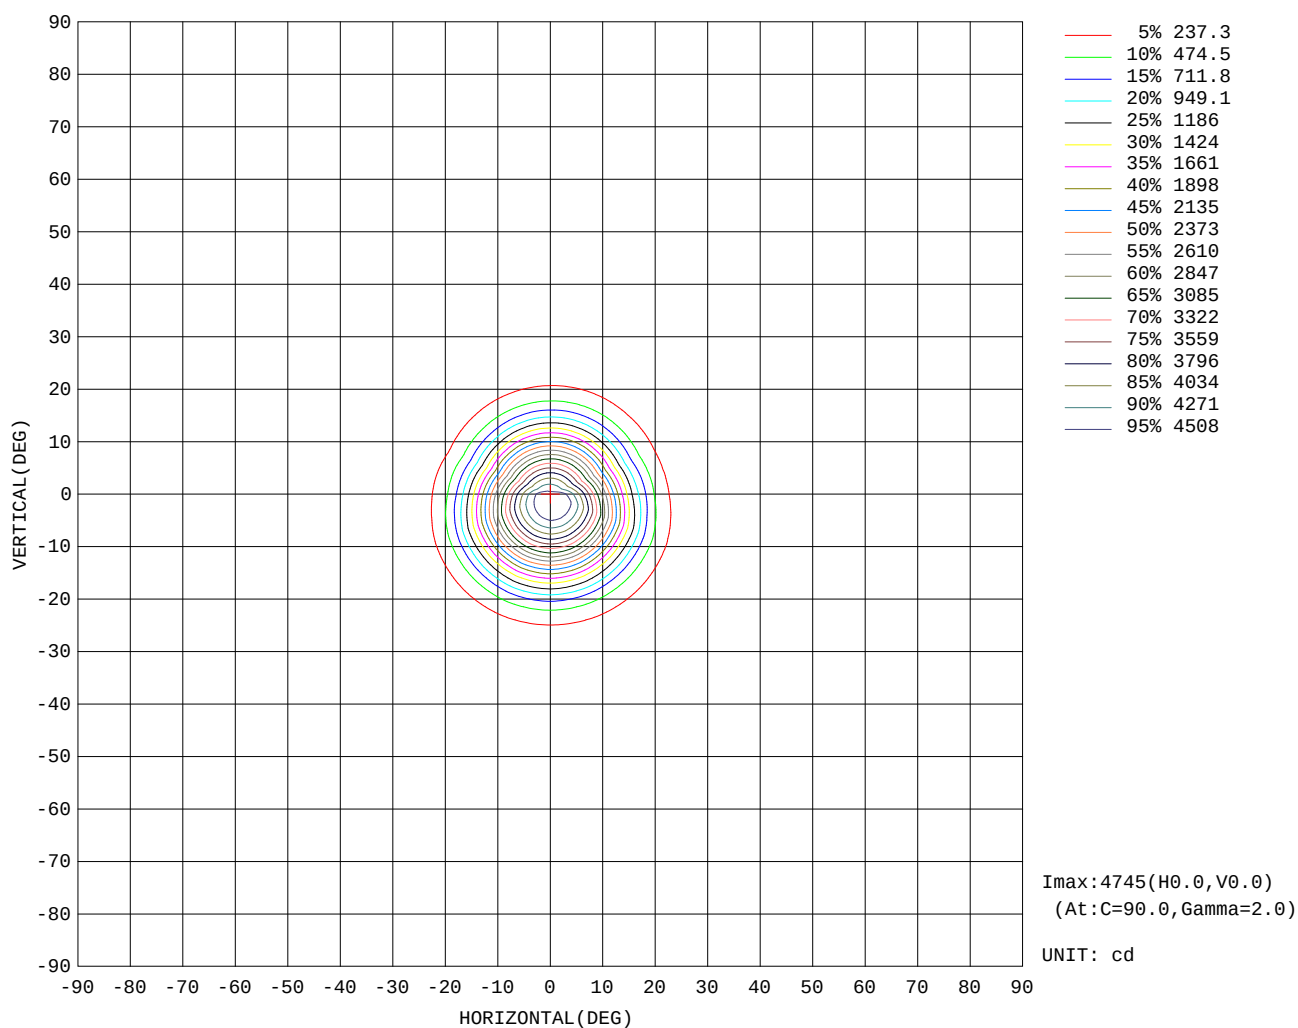

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:


AAI Figure

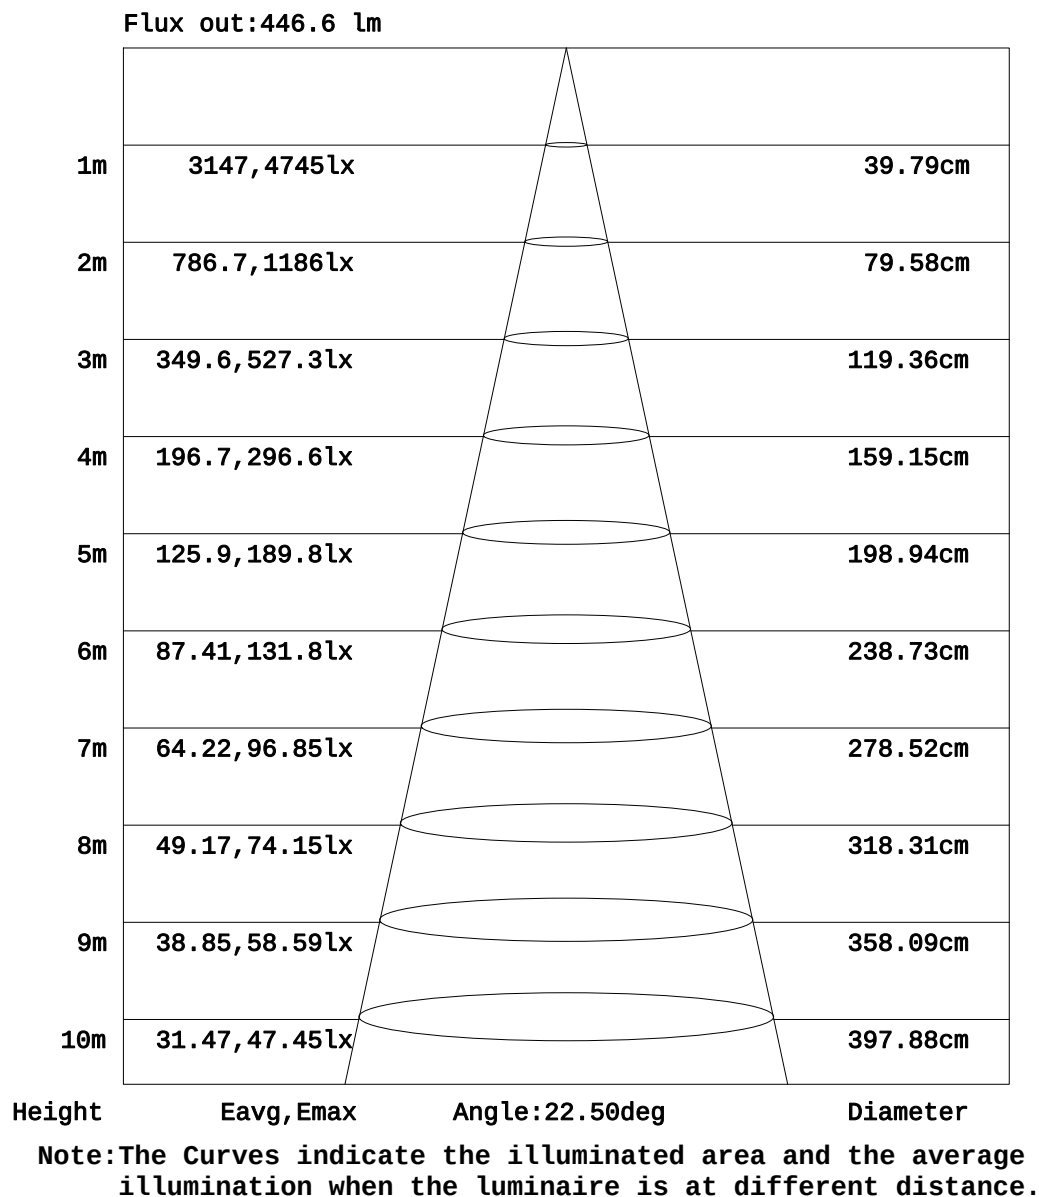

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

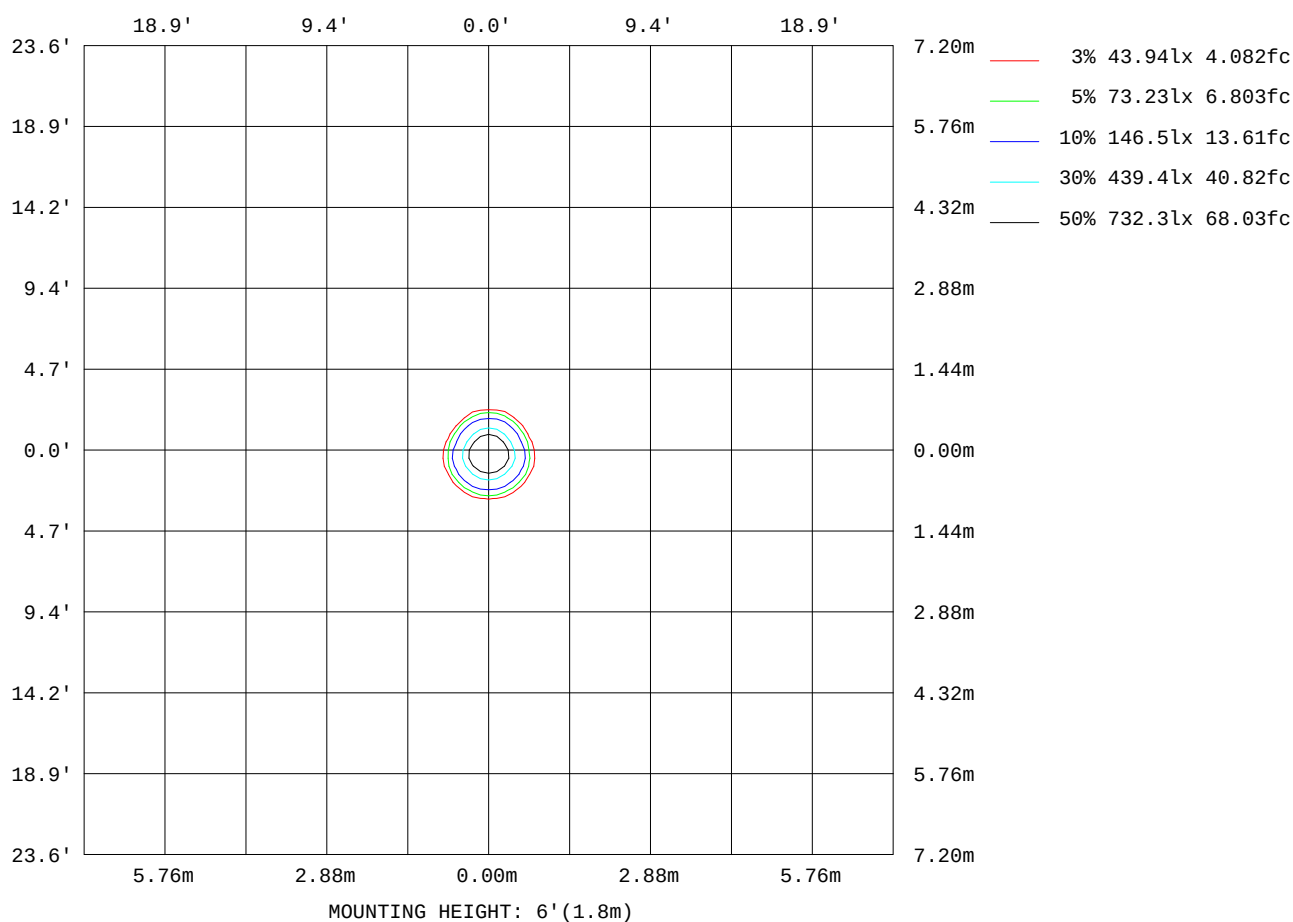

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.12V I:0.1059A P:11.614W PF:0.4981 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:817.445x1 Lm		
NAME: DDW31-LM13E-230BWT	TYPE: 嵌入式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	57
L_0~180(75)av	126
L_0~180(85)av	14
L_90~270(65)av	45
L_90~270(75)av	80
L_90~270(85)av	12
L_45(65)av	46
L_45(75)av	83
L_45(85)av	12

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

Planar Illuminance Curve

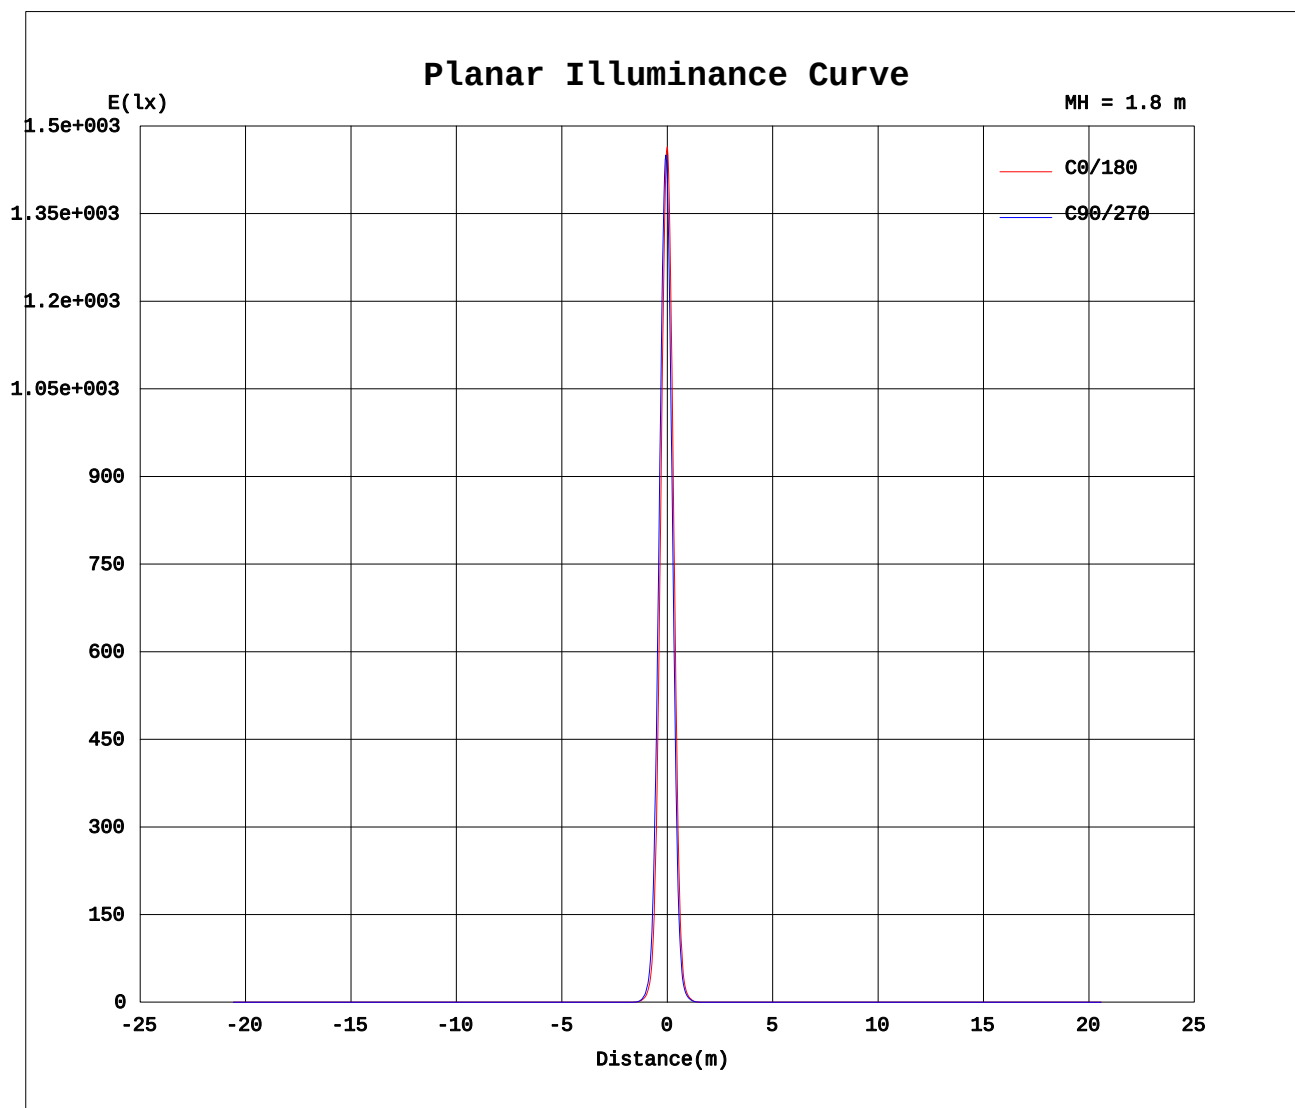

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609	4609			
5	4029	4371	4474	4539	4555	4513	4423	4306	3972	3687	3616	3586	3583	3614	3664	3739			
10	2696	3177	3328	3433	3467	3414	3288	3114	2649	2272	2188	2149	2151	2187	2256	2343			
15	1283	1685	1821	1928	1975	1939	1818	1655	1274	963	909	887	891	919	960	1018			
20	435	624	698	761	790	772	696	598	409	306	289	284	290	303	311	341			
25	133	186	210	229	237	228	202	173	121	90.4	86.3	85.9	88.1	92.0	96.9	102			
30	47.5	63.8	69.7	74.3	76.2	73.3	66.2	58.3	42.8	33.0	32.9	32.7	33.7	34.2	36.0	37.9			
35	15.3	21.6	21.9	21.7	21.4	20.5	19.1	17.5	12.2	8.66	8.82	9.16	9.77	10.4	10.9	11.3			
40	2.89	4.06	4.05	3.91	3.83	3.67	3.32	3.08	2.26	1.76	1.83	1.90	2.00	2.12	2.16	2.19			
45	0.88	1.06	1.02	0.99	0.99	0.97	0.95	0.93	0.80	0.69	0.70	0.73	0.76	0.78	0.78	0.77			
50	0.31	0.39	0.37	0.36	0.36	0.36	0.36	0.36	0.28	0.21	0.21	0.22	0.23	0.24	0.25	0.24			
55	0.06	0.08	0.07	0.07	0.07	0.07	0.08	0.08	0.06	0.04	0.04	0.03	0.03	0.04	0.04	0.04			
60	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.17	0.19	0.19	0.19	0.19	0.19	0.19	0.19			
65	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.19	0.16	0.15	0.14	0.15	0.14	0.14	0.14			
70	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.19	0.24	0.22	0.21	0.22	0.21	0.21	0.21			
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.26	0.21	0.17	0.16	0.16	0.16	0.16	0.16			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	0.18	0.18	0.18	0.18	0.18	0.18	0.18			
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks: