


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.14V I:0.0753A P:8.0009W PF:0.4826 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:402.644x1 lm


NAME: DDW31-LM07E-530SWT	TYPE: recessed luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 50.32 lm/W
MODEL		Imax(cd)	570.8	S/MH(C0/180)	0.80	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.78	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	402.64	η UP, DN(C0-180)	0.0, 51.9	
NOMINAL FLUX(lm)	402.644	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 48.1	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	0.80	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

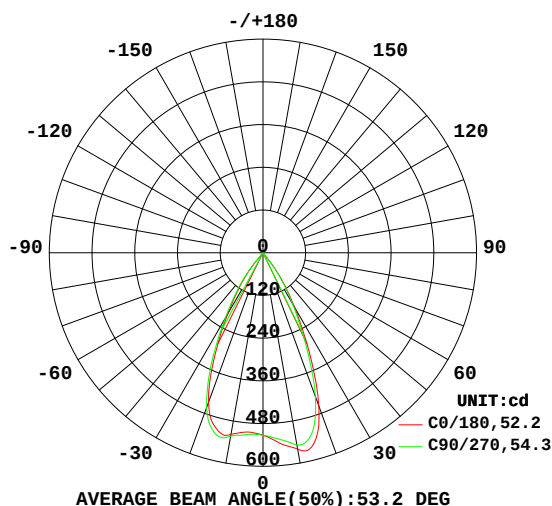

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

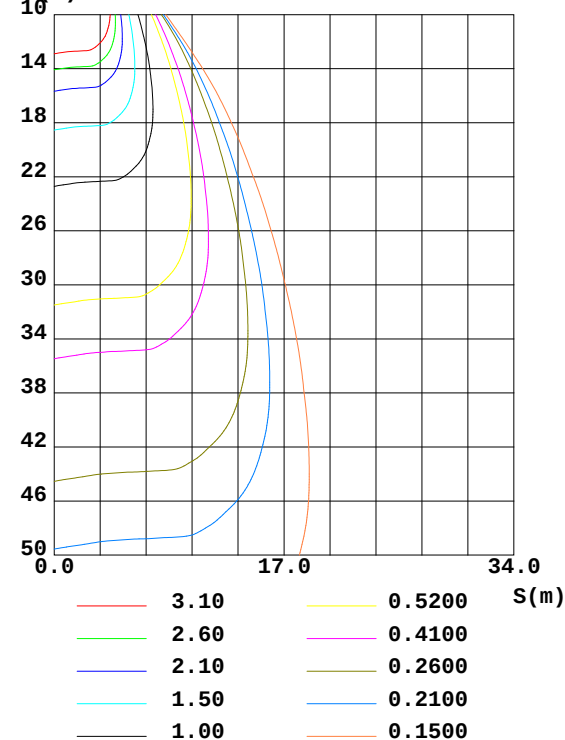

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	518.3	521.0	523.3	543.1	560.0	558.8	548.3	527.7	0- 10	50.22	50.22	12.5
20	447.5	446.2	462.9	474.5	458.7	454.0	430.5	436.0	10- 20	145.7	195.9	48.7
30	197.5	203.1	213.0	203.8	178.9	180.8	167.2	172.8	20- 30	143.1	339.0	84.2
40	24.41	21.32	26.32	16.36	6.904	8.960	5.688	11.41	30- 40	61.18	400.2	99.4
50	0.6259	0.6024	0.6263	0.5377	0.4220	0.4416	0.3914	0.4664	40- 50	2.086	402.3	99.9
60	0.0118	0.0118	0.0119	0.0128	0.1588	0.1574	0.1714	0.1734	50- 60	0.1531	402.5	100
70	0.0101	0.0101	0.0114	0.0119	0.1396	0.1380	0.2066	0.1960	60- 70	0.0773	402.5	100
80	0.0055	0.0059	0.0063	0.0072	0.2078	0.1925	0.1608	0.1611	70- 80	0.0918	402.6	100
90	0	0	0	0	0	0	0	0	80- 90	0.0178	402.6	100
100	0	0	0	0	0	0	0	0	90-100	0	402.6	100
110	0	0	0	0	0	0	0	0	100-110	0	402.6	100
120	0	0	0	0	0	0	0	0	110-120	0	402.6	100
130	0	0	0	0	0	0	0	0	120-130	0	402.6	100
140	0	0	0	0	0	0	0	0	130-140	0	402.6	100
150	0	0	0	0	0	0	0	0	140-150	0	402.6	100
160	0	0	0	0	0	0	0	0	150-160	0	402.6	100
170	0	0	0	0	0	0	0	0	160-170	0	402.6	100
180	0	0	0	0	0	0	0	0	170-180	0	402.6	100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 401.95 lm

%lum = 99.8%

%lamp = 99.8%

Conical surface Flux(120deg): 402.46 lm


%lum = 100.0%

%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

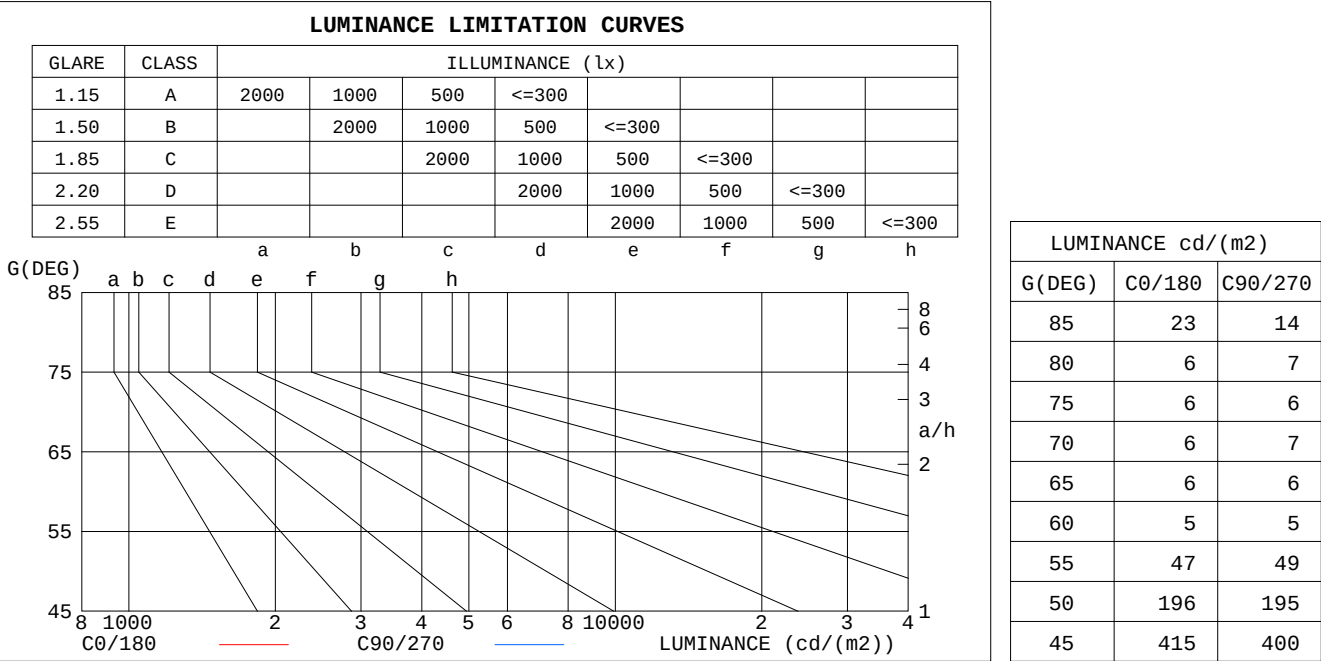


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.90	.97	.93	.90	.95	.91	.88	.92	.89	.87	.90	.88	.86	.84
4.0	.93	.88	.84	.92	.87	.84	.90	.86	.83	.88	.84	.82	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.82	.77	.74	.81	.76	.73	.80	.76	.73	.78	.75	.72	.71
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.69	.66	.74	.69	.66	.73	.69	.65	.72	.68	.65	.71	.68	.65	.64
9.0	.71	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.62	.60
10.0	.68	.63	.59	.67	.62	.59	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57

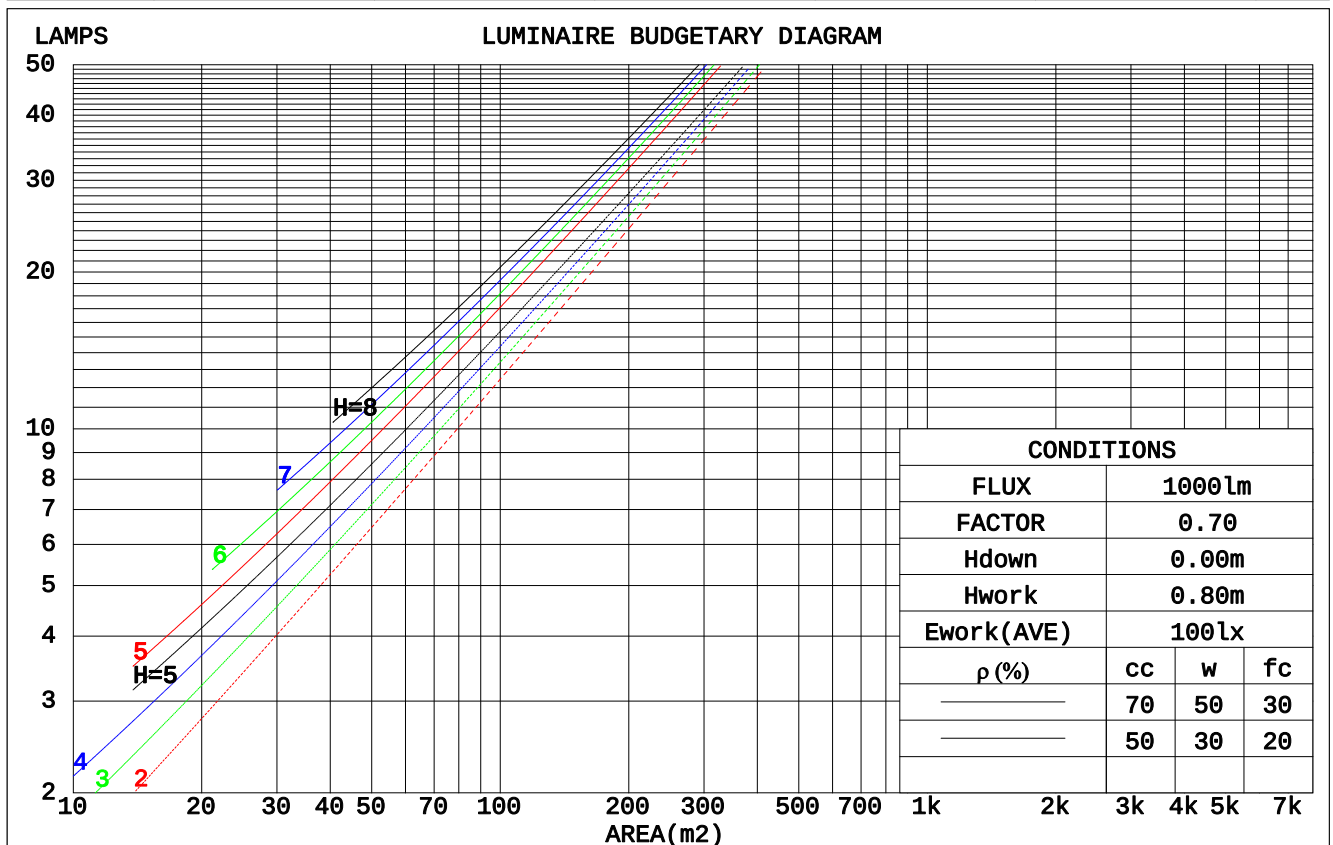

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{FC}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.163	.093	.029	.157	.089	.028	.144	.083	.026	.133	.077	.025	.122	.071	.023		
2.0	.155	.085	.026	.150	.082	.025	.139	.077	.024	.129	.073	.023	.120	.068	.021		
3.0	.147	.078	.023	.143	.076	.023	.134	.072	.022	.125	.069	.021	.118	.065	.020		
4.0	.140	.073	.021	.136	.071	.021	.128	.068	.020	.121	.065	.020	.115	.062	.019		
5.0	.134	.068	.020	.130	.067	.019	.124	.064	.019	.117	.062	.018	.112	.060	.018		
6.0	.128	.064	.018	.125	.063	.018	.119	.061	.018	.114	.059	.017	.109	.057	.017		
7.0	.122	.061	.017	.120	.060	.017	.115	.058	.017	.110	.056	.016	.105	.055	.016		
8.0	.117	.057	.016	.115	.057	.016	.111	.055	.016	.106	.054	.016	.102	.053	.015		
9.0	.113	.055	.015	.111	.054	.015	.107	.053	.015	.103	.052	.015	.099	.050	.015		
10.0	.109	.052	.014	.107	.052	.014	.103	.051	.014	.100	.049	.014	.096	.048	.014		

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{FC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.092	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.075	.112	.085	.065	.077	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.121	.087	.062	.104	.075	.054	.072	.052	.038	.041	.031	.022	.013	.010	.007	
6.0	.113	.077	.051	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.044	.092	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.101	.063	.037	.087	.055	.033	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.091	.054	.028	.079	.046	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.7	14.5	13.9	14.7	14.9	14.2	15.1	14.4	15.2	15.4
3H	13.5	14.3	13.8	14.5	14.7	14.0	14.8	14.3	15.0	15.2
4H	13.4	14.2	13.7	14.4	14.6	14.0	14.7	14.2	14.9	15.1
6H	13.3	14.0	13.6	14.3	14.5	13.9	14.6	14.2	14.8	15.1
8H	13.3	14.0	13.6	14.2	14.5	13.8	14.5	14.1	14.7	15.0
12H	13.3	13.9	13.6	14.2	14.4	13.8	14.4	14.1	14.7	15.0
4H 2H	13.4	14.2	13.7	14.4	14.6	14.0	14.7	14.2	14.9	15.1
3H	13.3	13.9	13.6	14.2	14.4	13.8	14.4	14.1	14.7	15.0
4H	13.2	13.7	13.5	14.0	14.3	13.7	14.3	14.0	14.6	14.9
6H	13.1	13.6	13.4	13.9	14.2	13.6	14.1	14.0	14.4	14.8
8H	13.0	13.5	13.4	13.8	14.2	13.5	14.0	13.9	14.4	14.7
12H	13.0	13.4	13.4	13.8	14.1	13.5	13.9	13.9	14.3	14.7
8H 4H	13.0	13.5	13.4	13.8	14.2	13.5	14.0	13.9	14.4	14.7
6H	12.9	13.3	13.3	13.7	14.1	13.4	13.8	13.9	14.2	14.6
8H	12.8	13.2	13.3	13.6	14.0	13.4	13.7	13.8	14.1	14.6
12H	12.8	13.1	13.3	13.5	14.0	13.3	13.6	13.8	14.1	14.5
12H 4H	13.0	13.4	13.4	13.8	14.1	13.5	13.9	13.9	14.3	14.7
6H	12.8	13.2	13.3	13.6	14.0	13.4	13.7	13.8	14.1	14.6
8H	12.8	13.1	13.3	13.5	14.0	13.3	13.6	13.8	14.1	14.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.7 / -37.1					+ 4.2 / -37.4				
1.5H	+ 7.5 / -32.1					+ 7.0 / -32.1				
2.0H	+ 6.8 / -15.5					+ 6.5 / -15.5				

CIE Pub.117, 402.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -3.2)
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	90	96	92	89	86
1.00	102	97	94	101	96	93	100	96	93	89
1.25	105	101	98	104	100	97	102	99	97	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

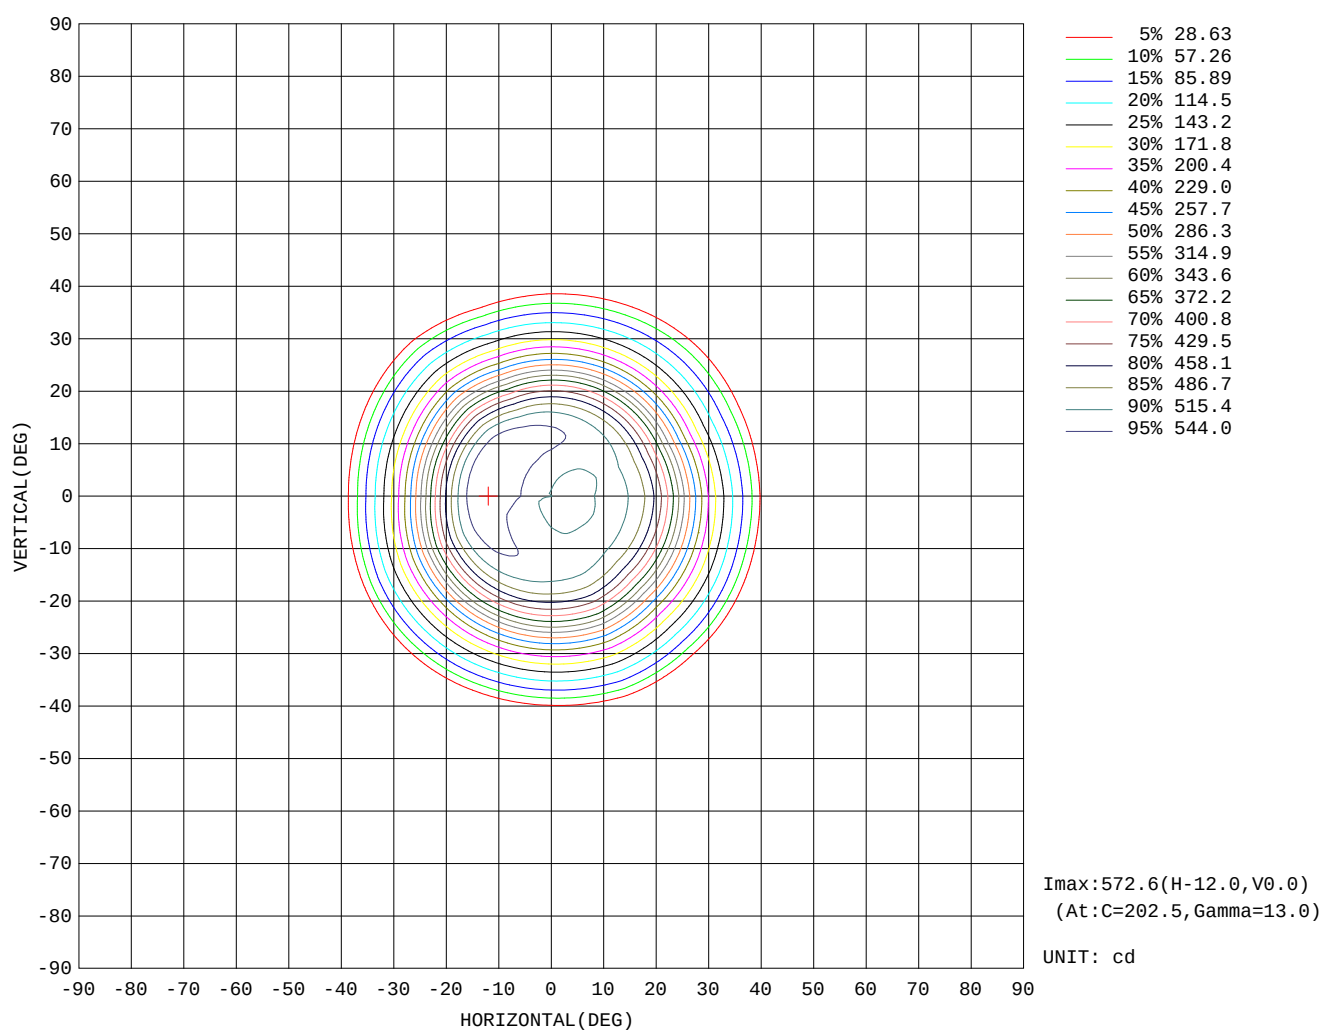

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:


AAI Figure

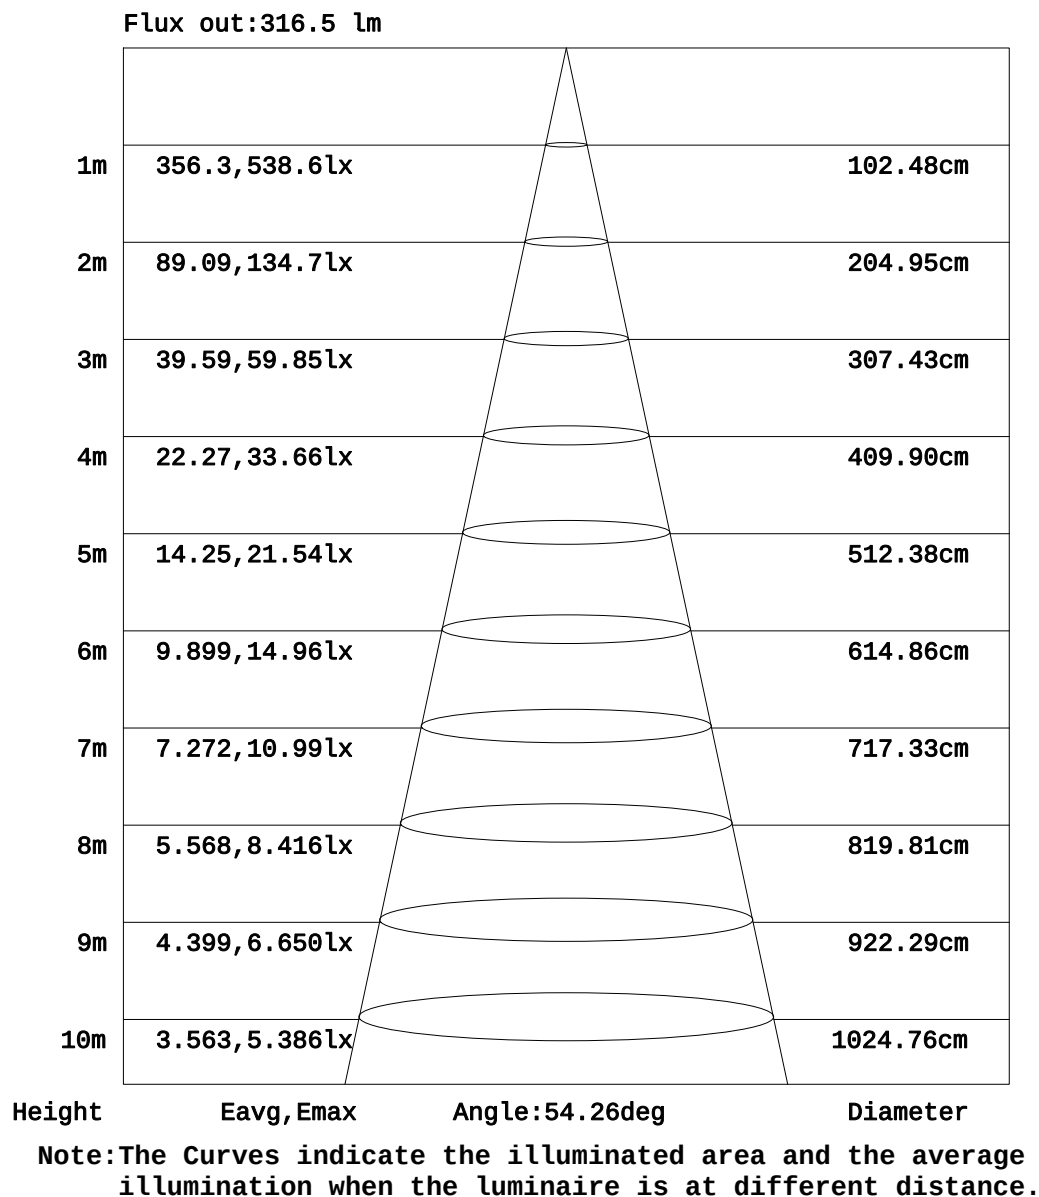

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

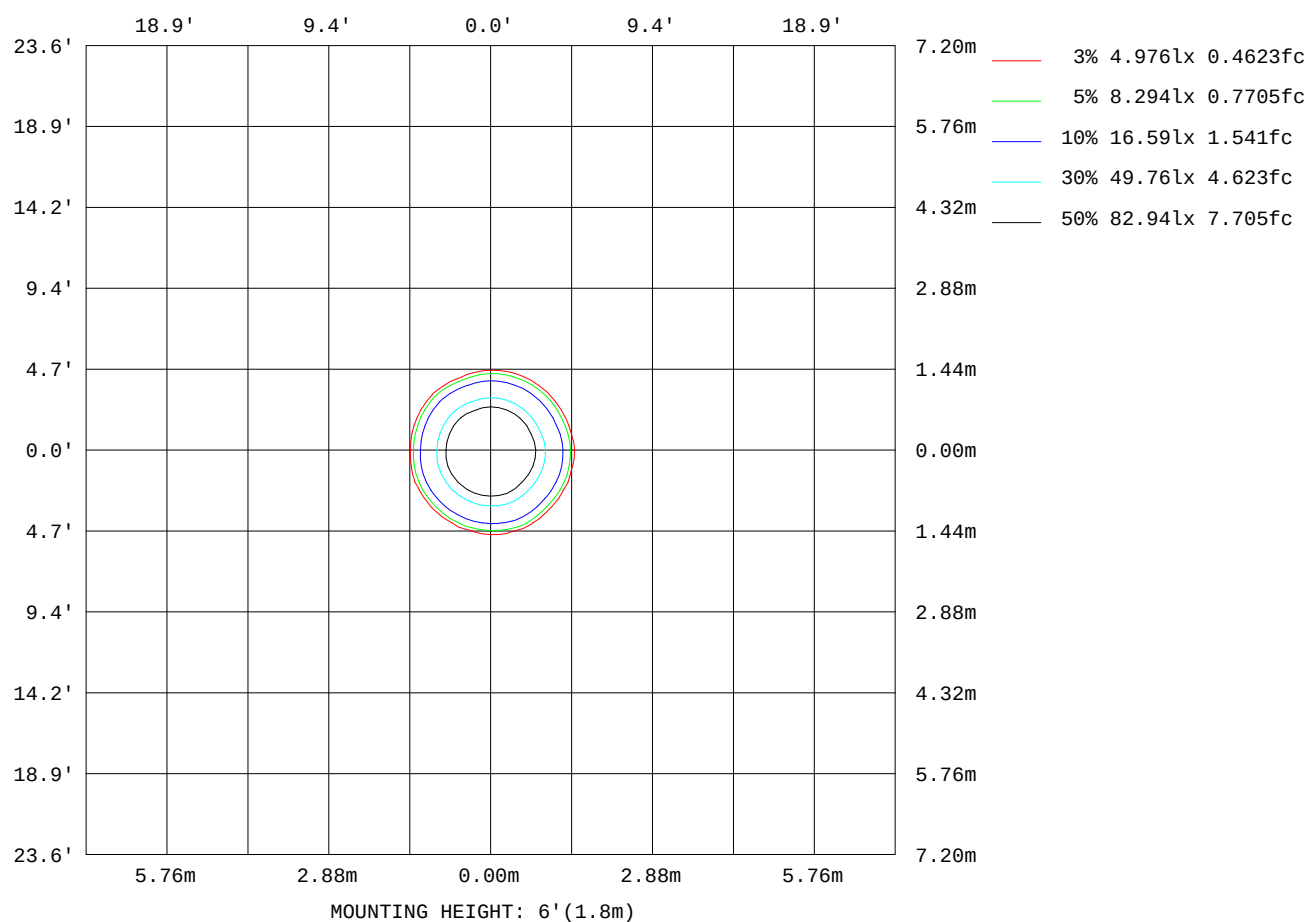

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.14V I:0.0753A P:8.0009W PF:0.4826 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:402.644x1 Lm		
NAME: DDW31-LM07E-530SWT	TYPE: 嵌入式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	37
L_0~180(75)av	66
L_0~180(85)av	16
L_90~270(65)av	36
L_90~270(75)av	60
L_90~270(85)av	13
L_45(65)av	38
L_45(75)av	67
L_45(85)av	22

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

Planar Illuminance Curve

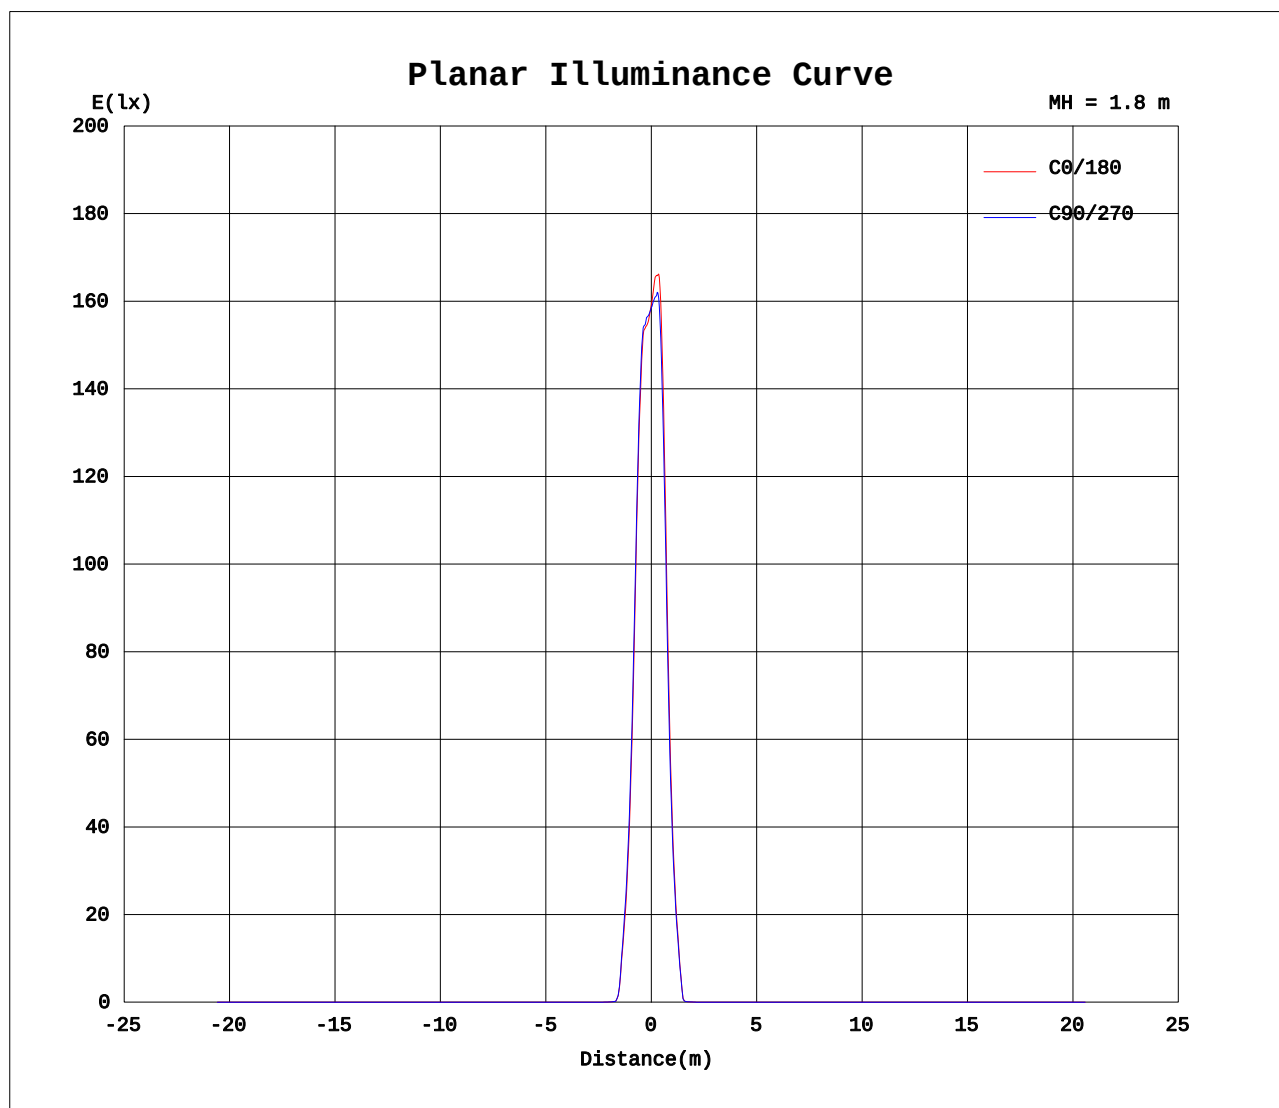

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	513	513	513	513	513	513	513	513	513	513	513	513	513	513	513	513			
5	506	506	508	508	512	519	525	531	537	538	536	533	526	519	514	510			
10	518	521	521	517	523	532	543	552	560	562	559	557	548	538	528	523			
15	510	512	512	520	524	532	547	558	554	556	552	533	528	524	519	512			
20	448	448	446	462	463	468	475	480	459	456	454	427	430	434	436	435			
25	323	326	324	345	343	341	339	336	308	306	307	282	286	292	296	300			
30	197	204	203	218	213	208	204	200	179	178	181	164	167	170	173	176			
35	107	112	112	123	118	113	108	106	90.5	91.0	93.5	81.0	84.6	87.5	90.1	92.9			
40	24.4	24.2	21.3	32.7	26.3	20.1	16.4	14.4	6.90	7.75	8.96	3.92	5.69	8.59	11.4	13.6			
45	1.46	1.48	1.44	1.50	1.41	1.32	1.26	1.20	1.07	1.08	1.10	1.00	1.07	1.13	1.20	1.28			
50	0.63	0.63	0.60	0.68	0.63	0.58	0.54	0.52	0.42	0.43	0.44	0.36	0.39	0.43	0.47	0.50			
55	0.13	0.13	0.12	0.16	0.14	0.13	0.11	0.11	0.07	0.08	0.08	0.05	0.06	0.07	0.08	0.09			
60	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.16	0.16	0.16	0.15	0.17	0.18	0.17	0.16			
65	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.14	0.15	0.15	0.14	0.14	0.14	0.14	0.13			
70	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.14	0.16	0.14	0.21	0.21	0.20	0.20	0.19			
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.16	0.17	0.17	0.15	0.15	0.15	0.16	0.16			
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.21	0.20	0.19	0.16	0.16	0.16	0.16	0.16			
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.01			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks: