


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.14V I:0.0508A P:4.9676W PF:0.4445 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:267.282x1 lm


NAME: DDW21-LM04E-130SWT	TYPE: recessed luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 53.81 lm/W			
MODEL		Imax(cd)	2528	S/MH(C0/180)	0.27
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.27
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	267.28	η UP, DN(C0-180)	0.0, 54.8
NOMINAL FLUX(lm)	267.282	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 45.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

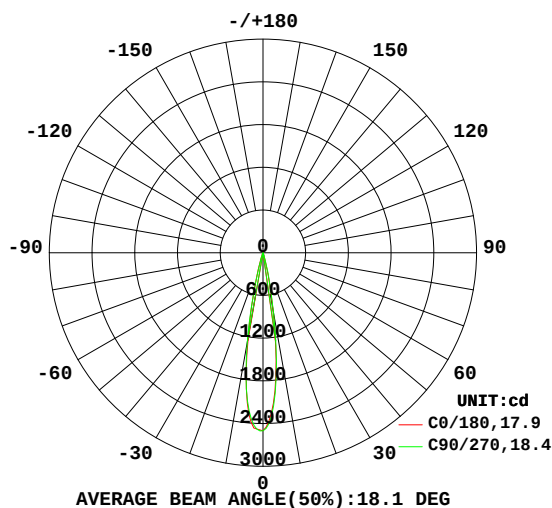

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

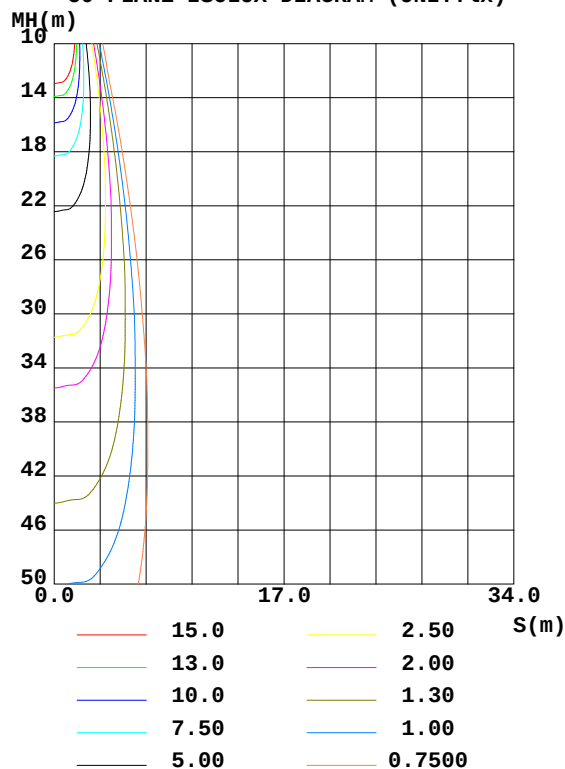

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	1201	1341	1272	947.4	804.9	726.3	860.4	1087	0- 10	165.5	165.5	61.9
20	82.40	88.11	61.19	36.88	33.74	33.32	43.99	60.33	10- 20	85.43	250.9	93.9
30	15.34	13.28	10.06	7.662	7.539	8.491	10.67	13.68	20- 30	10.79	261.7	97.9
40	4.767	4.026	2.954	2.557	2.728	3.152	3.763	4.710	30- 40	4.093	265.8	99.5
50	0.6849	0.4814	0.2749	0.1752	0.1710	0.2435	0.4058	0.6376	40- 50	1.114	266.9	99.9
60	0.0332	0.0261	0.0181	0.0106	0.1790	0.1764	0.1810	0.1901	50- 60	0.1524	267.1	99.9
70	0.0088	0.0071	0.0089	0.0076	0.1559	0.1652	0.1644	0.1661	60- 70	0.0828	267.2	100
80	0.0054	0.0050	0.0038	0.0042	0.1939	0.1931	0.1990	0.2026	70- 80	0.0924	267.3	100
90	0	0	0	0	0	0	0	0	80- 90	0.0256	267.3	100
100	0	0	0	0	0	0	0	0	90-100	0	267.3	100
110	0	0	0	0	0	0	0	0	100-110	0	267.3	100
120	0	0	0	0	0	0	0	0	110-120	0	267.3	100
130	0	0	0	0	0	0	0	0	120-130	0	267.3	100
140	0	0	0	0	0	0	0	0	130-140	0	267.3	100
150	0	0	0	0	0	0	0	0	140-150	0	267.3	100
160	0	0	0	0	0	0	0	0	150-160	0	267.3	100
170	0	0	0	0	0	0	0	0	160-170	0	267.3	100
180	0	0	0	0	0	0	0	0	170-180	0	267.3	100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 266.61 lm

%lum = 99.8%

%lamp = 99.8%

Conical surface Flux(120deg): 267.08 lm


%lum = 99.9%

%lamp = 99.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

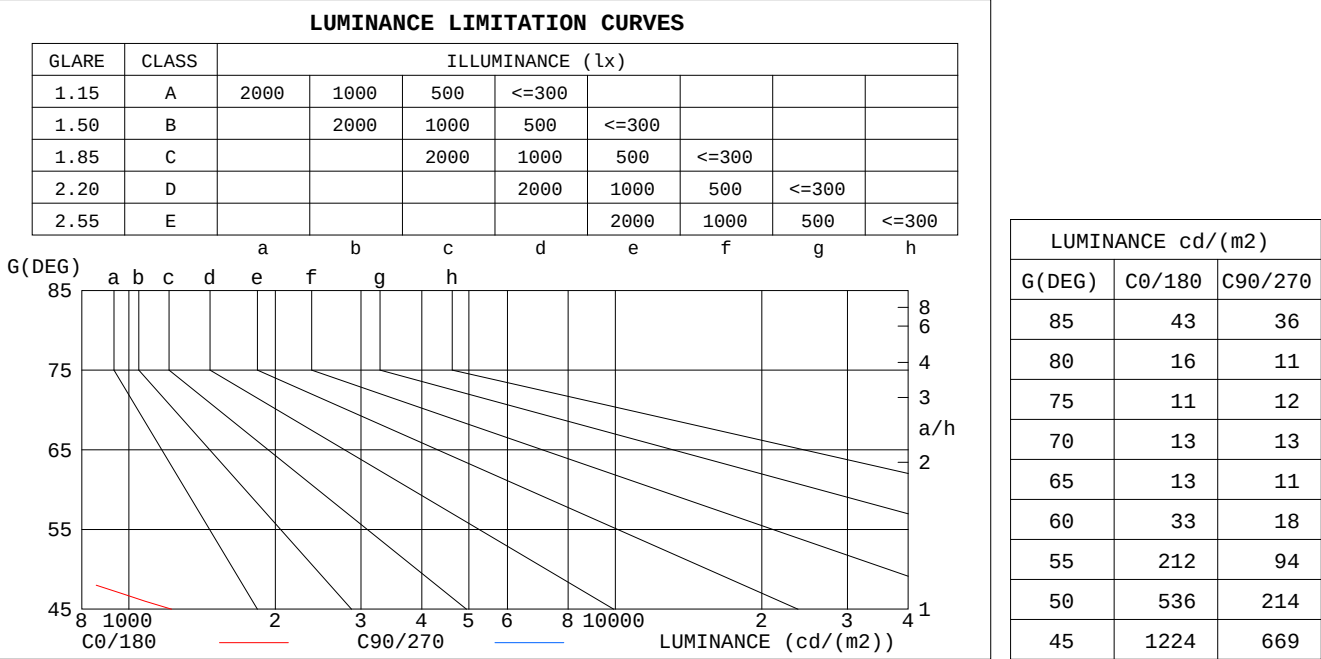


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.14	1.12	1.11	1.12	1.10	1.09	1.08	1.07	1.06	1.04	1.04	1.03	1.01	1.00	.00	.98
2.0	1.10	1.07	1.05	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.01	.00	.00	.99	.98	.96
3.0	1.07	1.04	1.01	1.05	1.03	1.00	1.03	1.01	.99	1.01	.99	.97	.99	.97	.96	.95
4.0	1.04	1.00	.98	1.03	.00	.98	1.01	.98	.96	.99	.97	.95	.97	.96	.94	.93
5.0	1.01	.98	.96	1.00	.97	.95	.99	.96	.94	.97	.95	.94	.96	.94	.93	.92
6.0	.99	.96	.93	.98	.95	.93	.97	.94	.93	.96	.94	.92	.95	.93	.91	.91
7.0	.97	.94	.92	.96	.93	.91	.95	.93	.91	.95	.92	.90	.94	.92	.90	.89
8.0	.95	.92	.90	.95	.92	.90	.94	.91	.89	.93	.91	.89	.92	.90	.89	.88
9.0	.94	.91	.88	.93	.90	.88	.93	.90	.88	.92	.90	.88	.91	.89	.88	.87
10.0	.92	.89	.87	.92	.89	.87	.91	.89	.87	.91	.88	.87	.90	.88	.87	.86

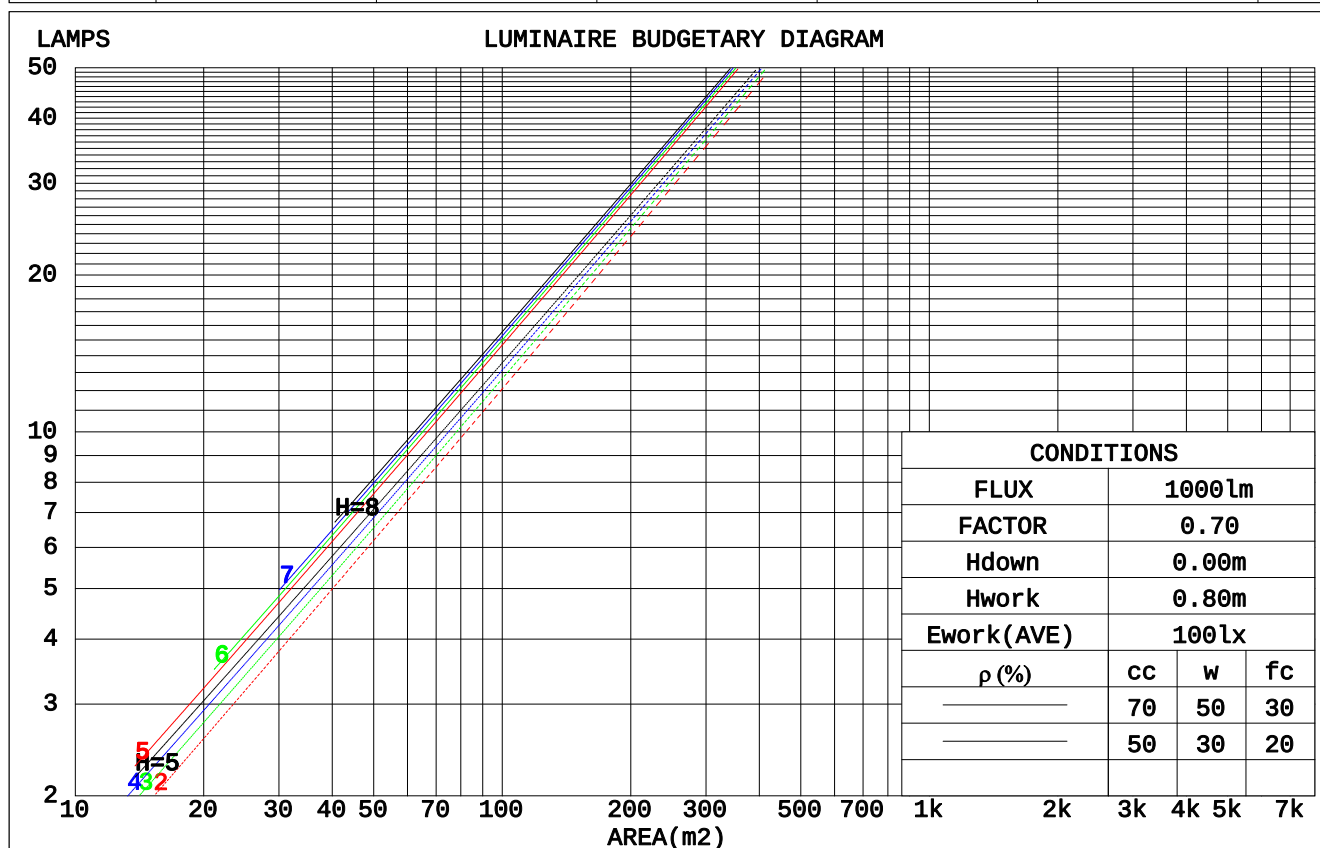

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.116	.066	.021	.109	.062	.020	.097	.056	.018	.086	.049	.016	.075	.044	.014		
2.0	.105	.057	.018	.100	.055	.017	.090	.050	.015	.080	.045	.014	.072	.041	.013		
3.0	.096	.051	.015	.092	.049	.015	.083	.045	.014	.076	.042	.013	.069	.038	.012		
4.0	.089	.046	.014	.085	.044	.013	.078	.041	.012	.072	.039	.012	.066	.036	.011		
5.0	.082	.042	.012	.079	.041	.012	.073	.038	.011	.068	.036	.011	.063	.034	.010		
6.0	.077	.039	.011	.074	.038	.011	.069	.036	.010	.065	.034	.010	.061	.032	.009		
7.0	.072	.036	.010	.070	.035	.010	.066	.033	.010	.062	.032	.009	.058	.030	.009		
8.0	.068	.033	.009	.066	.033	.009	.063	.031	.009	.059	.030	.009	.056	.029	.008		
9.0	.065	.031	.009	.063	.031	.009	.060	.030	.008	.057	.028	.008	.054	.027	.008		
10.0	.061	.029	.008	.060	.029	.008	.057	.028	.008	.055	.027	.008	.052	.026	.008		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.167	.158	.150	.143	.135	.129	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.147	.133	.121	.126	.114	.104	.086	.079	.073	.050	.046	.043	.016	.015	.014	
3.0	.131	.113	.099	.112	.098	.086	.077	.068	.060	.045	.040	.035	.014	.013	.012	
4.0	.117	.097	.082	.101	.084	.071	.069	.059	.050	.040	.034	.030	.013	.011	.010	
5.0	.106	.085	.069	.091	.073	.060	.063	.051	.043	.036	.030	.025	.012	.010	.008	
6.0	.096	.074	.059	.082	.064	.051	.057	.045	.036	.033	.027	.022	.011	.009	.007	
7.0	.088	.066	.050	.075	.057	.044	.052	.040	.031	.030	.024	.019	.010	.008	.006	
8.0	.081	.059	.044	.069	.051	.038	.048	.036	.027	.028	.021	.016	.009	.007	.005	
9.0	.074	.053	.038	.064	.046	.033	.044	.032	.024	.026	.019	.014	.008	.006	.005	
10.0	.069	.048	.033	.060	.041	.029	.041	.029	.021	.024	.017	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.2	1.7	1.4	1.9	2.0	-0.7	-0.2	-0.5	-0.1	0.1
3H	1.1	1.6	1.3	1.8	1.9	-0.8	-0.4	-0.6	-0.2	-0.0
4H	1.0	1.5	1.3	1.7	1.9	-0.9	-0.5	-0.7	-0.3	-0.1
6H	1.0	1.4	1.2	1.6	1.8	-1.0	-0.6	-0.7	-0.3	-0.1
8H	0.9	1.3	1.2	1.6	1.8	-1.0	-0.6	-0.8	-0.4	-0.1
12H	0.9	1.3	1.2	1.5	1.8	-1.1	-0.7	-0.8	-0.4	-0.2
4H 2H	1.0	1.5	1.3	1.7	1.9	-0.9	-0.5	-0.7	-0.3	-0.1
3H	0.9	1.3	1.2	1.5	1.8	-1.1	-0.7	-0.8	-0.4	-0.2
4H	0.8	1.1	1.1	1.4	1.7	-1.2	-0.8	-0.8	-0.5	-0.2
6H	0.7	1.0	1.0	1.3	1.7	-1.3	-0.9	-0.9	-0.6	-0.3
8H	0.6	0.9	1.0	1.3	1.6	-1.3	-1.0	-1.0	-0.7	-0.3
12H	0.6	0.8	1.0	1.2	1.6	-1.4	-1.1	-1.0	-0.7	-0.4
8H 4H	0.6	0.9	1.0	1.3	1.6	-1.3	-1.0	-1.0	-0.7	-0.3
6H	0.5	0.8	0.9	1.1	1.5	-1.5	-1.2	-1.0	-0.8	-0.4
8H	0.4	0.7	0.9	1.1	1.5	-1.5	-1.3	-1.1	-0.9	-0.4
12H	0.4	0.6	0.8	1.0	1.5	-1.6	-1.4	-1.1	-0.9	-0.5
12H 4H	0.6	0.8	0.9	1.2	1.6	-1.4	-1.1	-1.0	-0.7	-0.4
6H	0.4	0.7	0.9	1.1	1.5	-1.5	-1.3	-1.1	-0.9	-0.4
8H	0.4	0.6	0.8	1.0	1.5	-1.6	-1.4	-1.1	-0.9	-0.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.6 / -17.3					+ 2.9 / -19.1				
1.5H	+ 5.8 / -12.7					+ 5.2 / -12.5				
2.0H	+ 7.2 / -17.9					+ 6.6 / -14.9				

CIE Pub.117, 267.3 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -4.6$)
Area: 0.002 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	98	93	90	96	92	89	86
1.00	102	97	94	101	96	93	100	96	93	89
1.25	105	101	98	104	100	97	102	99	97	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

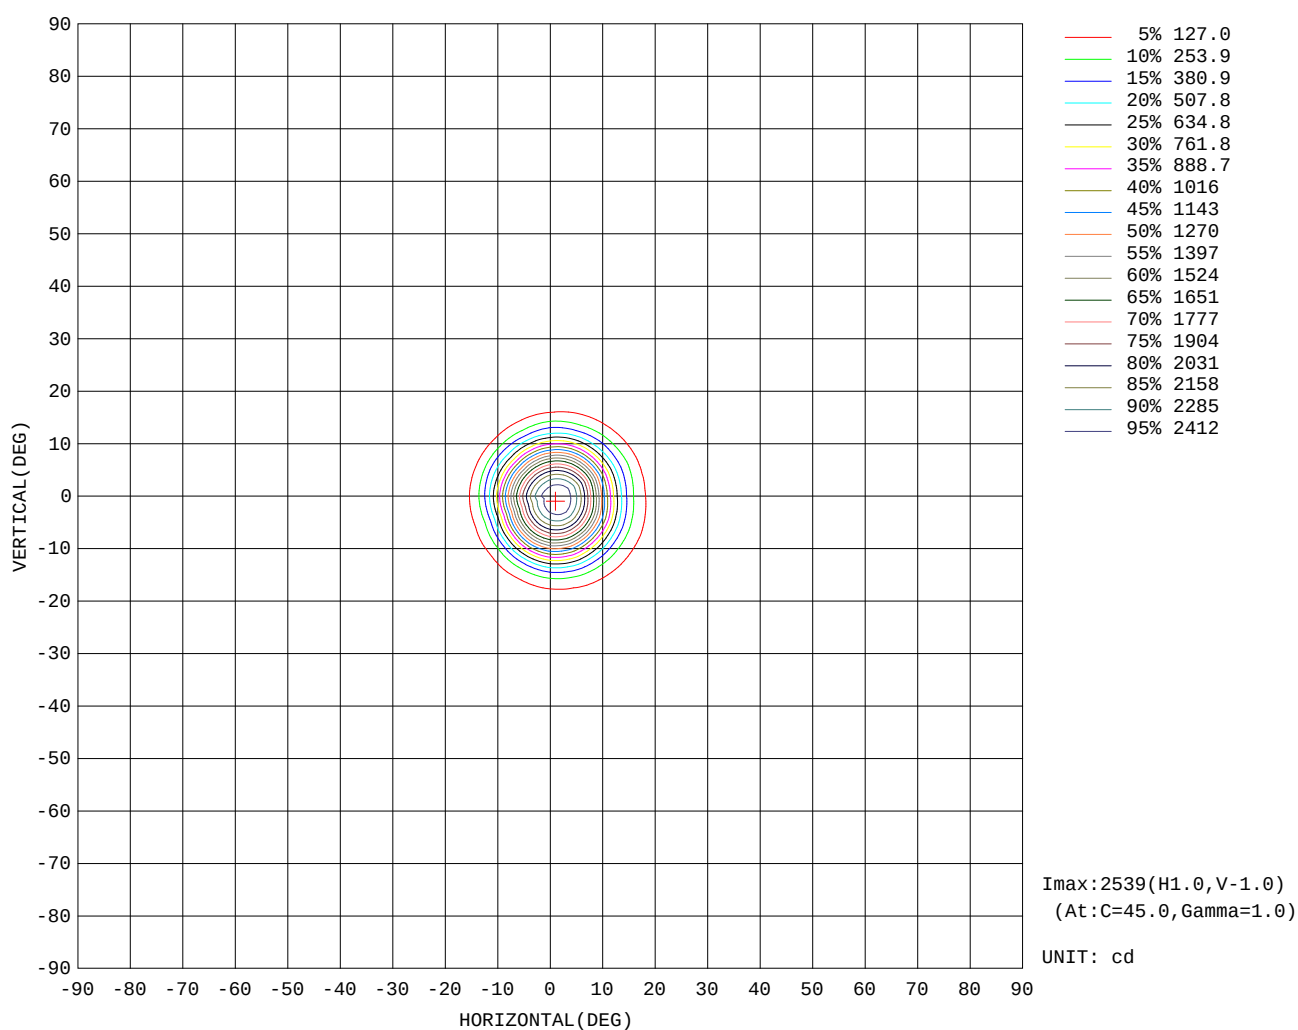

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:


AAI Figure

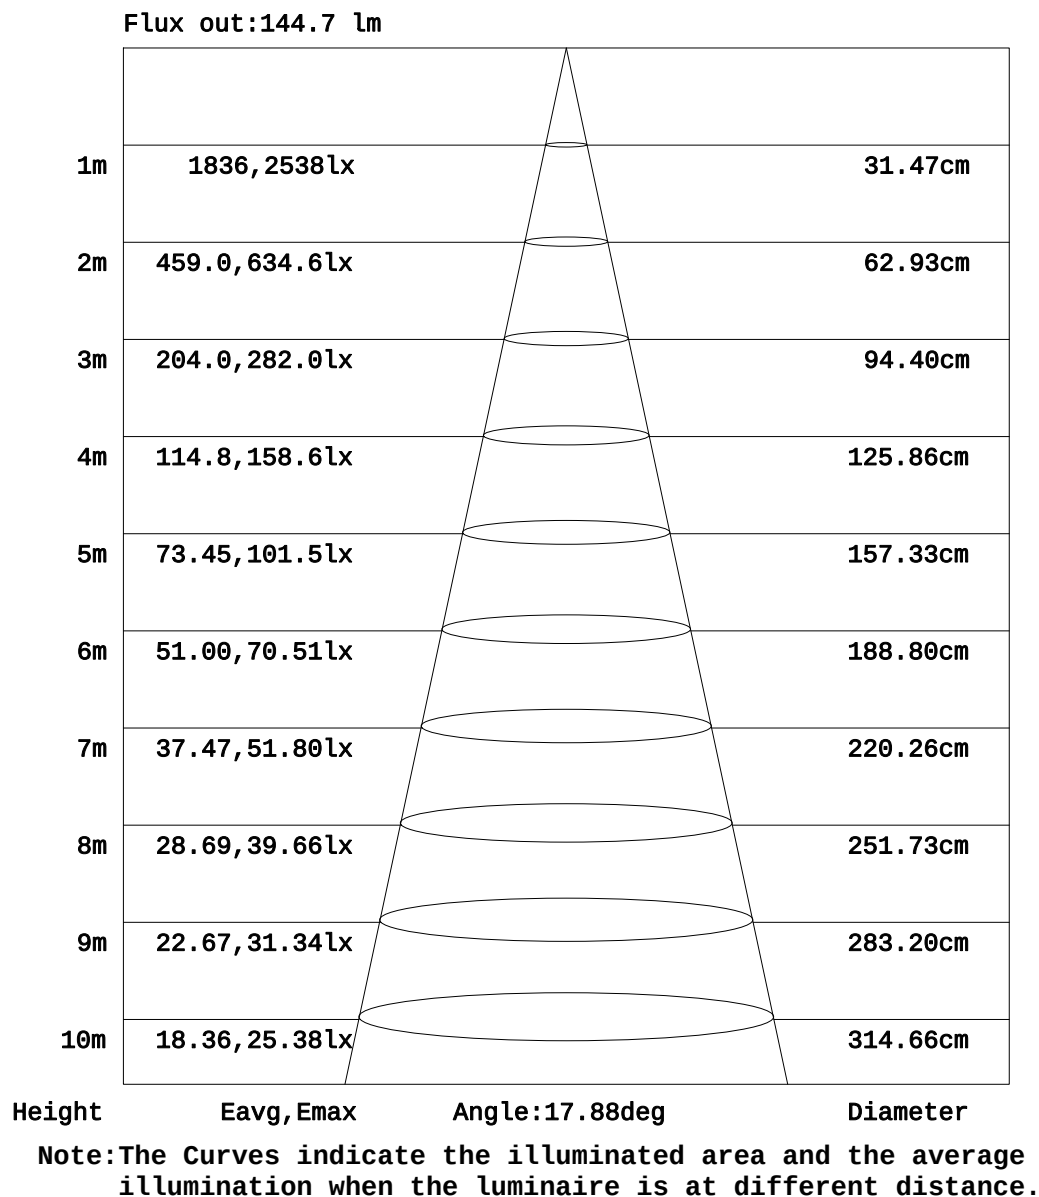

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

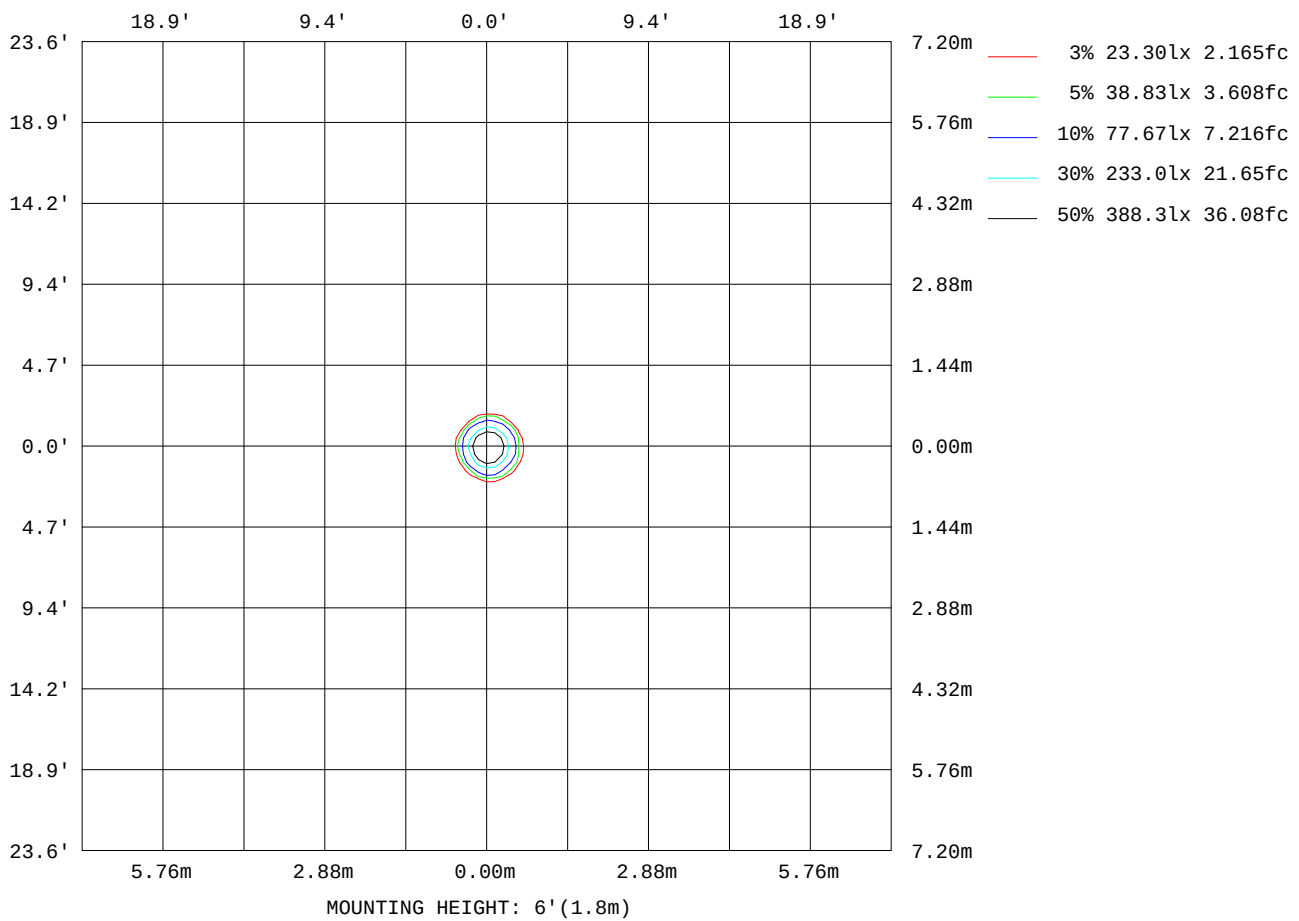

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.14V I:0.0508A P:4.9676W PF:0.4445 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:267.282x1 Lm		
NAME: DDW21-LM04E-130SWT	TYPE: 嵌入式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	104
L_0~180(75)av	168
L_0~180(85)av	32
L_90~270(65)av	105
L_90~270(75)av	173
L_90~270(85)av	28
L_45(65)av	105
L_45(75)av	173
L_45(85)av	27

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

Planar Illuminance Curve

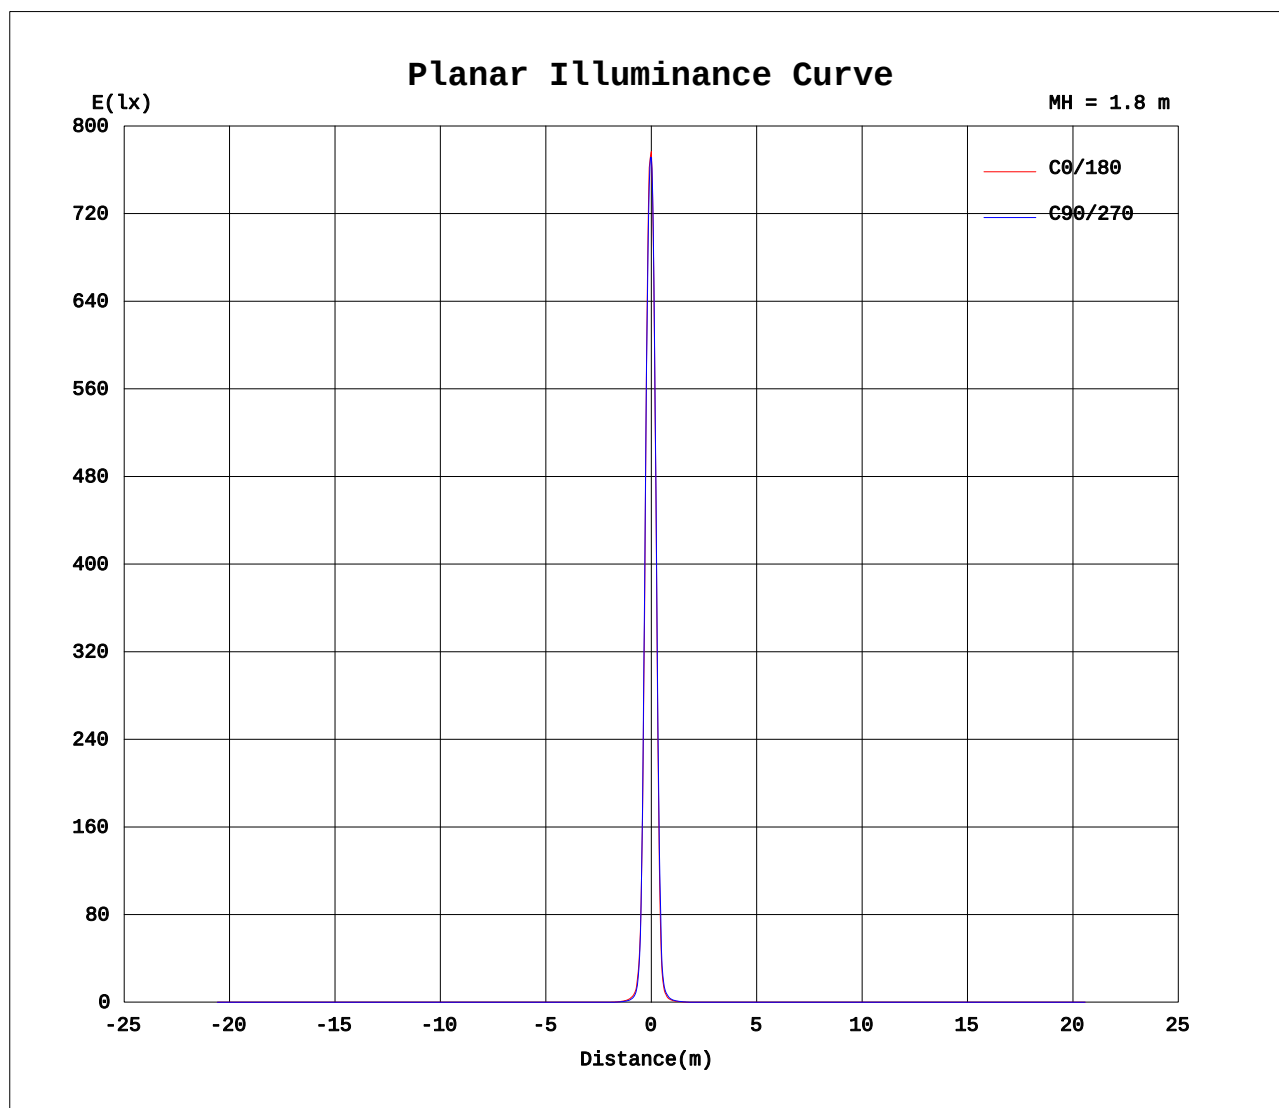

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501	2501			
5	2274	2306	2329	2296	2237	2154	2053	1952	1944	1893	1874	1909	1981	2080	2187	2294			
10	1201	1301	1341	1345	1272	1128	947	794	805	753	726	772	860	974	1087	1202			
15	326	374	387	375	319	242	178	139	143	135	132	144	175	218	292	342			
20	82.4	90.3	88.1	81.7	61.2	46.9	36.9	31.9	33.7	33.7	33.3	36.3	44.0	52.5	60.3	71.2			
25	29.6	29.6	26.2	23.8	21.4	17.8	14.8	13.5	14.3	14.8	15.3	16.8	19.8	23.9	26.5	29.2			
30	15.3	14.5	13.3	11.9	10.1	8.66	7.66	7.17	7.54	7.75	8.49	9.38	10.7	12.0	13.7	15.2			
35	8.66	8.14	7.44	6.64	5.60	4.90	4.50	4.30	4.60	4.85	5.39	5.94	6.54	7.33	8.27	8.79			
40	4.77	4.44	4.03	3.50	2.95	2.68	2.56	2.50	2.73	2.83	3.15	3.46	3.76	4.18	4.71	5.03			
45	1.72	1.60	1.33	1.13	0.95	0.84	0.80	0.74	0.77	0.86	0.98	1.12	1.24	1.33	1.64	1.79			
50	0.68	0.58	0.48	0.37	0.27	0.22	0.18	0.16	0.17	0.19	0.24	0.31	0.41	0.52	0.64	0.78			
55	0.24	0.23	0.19	0.14	0.11	0.08	0.06	0.05	0.06	0.07	0.09	0.12	0.15	0.19	0.23	0.26			
60	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.18	0.18	0.18	0.18	0.18	0.19	0.19	0.19			
65	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17			
70	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.16	0.16	0.17	0.16	0.16	0.17	0.17	0.17			
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.17	0.18	0.17	0.17	0.17	0.17	0.17	0.17			
80	0.01	0.00	0.01	0.00	0.00	0.01	0.00	0.00	0.19	0.19	0.19	0.20	0.20	0.20	0.20	0.20			
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks: