


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.15V I:0.0510A P:4.9931W PF:0.4449 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:333.515x1 lm


NAME: DDW21-LM04E-230SWT	TYPE: recessed luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.80 lm/W
MODEL		Imax(cd)	2008	S/MH(C0/180)	0.36	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.40	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	333.51	η UP, DN(C0-180)	0.0, 44.5	
NOMINAL FLUX(lm)	333.515	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 55.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

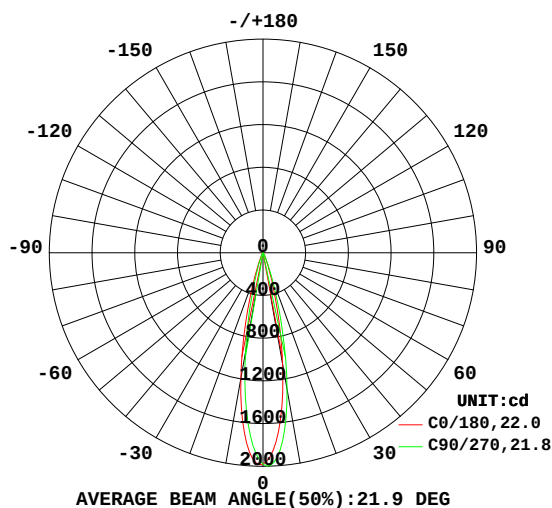

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

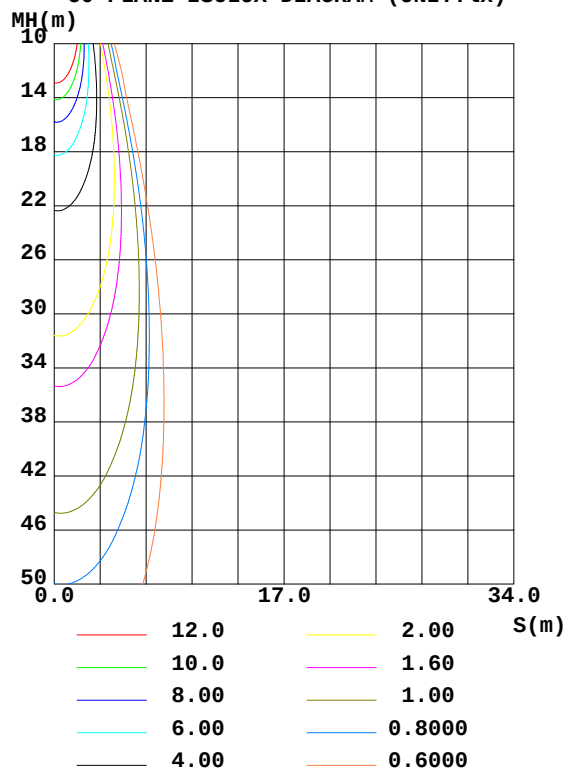

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	1199	1065	947.1	926.4	1061	1192	1301	1336	0- 10	145.5	145.5	43.6
20	177.9	145.8	122.9	121.0	159.1	198.3	215.7	221.3	10- 20	144.7	290.2	87
30	29.51	25.97	23.13	23.62	28.82	32.44	34.02	34.09	20- 30	32.77	323.0	96.8
40	5.246	4.526	3.485	2.857	3.297	3.947	5.033	5.974	30- 40	9.091	332.1	99.6
50	0.4386	0.3688	0.3068	0.2741	0.2891	0.3115	0.4046	0.4578	40- 50	1.132	333.2	99.9
60	0.0182	0.0160	0.0106	0.0089	0.1623	0.1644	0.1627	0.1699	50- 60	0.1301	333.3	99.9
70	0.0067	0.0076	0.0080	0.0076	0.1454	0.1523	0.1526	0.1555	60- 70	0.0802	333.4	100
80	0.0042	0.0046	0.0046	0.0034	0.1905	0.1912	0.1926	0.1935	70- 80	0.0925	333.5	100
90	0	0	0	0	0	0	0	0	80- 90	0.0254	333.5	100
100	0	0	0	0	0	0	0	0	90-100	0	333.5	100
110	0	0	0	0	0	0	0	0	100-110	0	333.5	100
120	0	0	0	0	0	0	0	0	110-120	0	333.5	100
130	0	0	0	0	0	0	0	0	120-130	0	333.5	100
140	0	0	0	0	0	0	0	0	130-140	0	333.5	100
150	0	0	0	0	0	0	0	0	140-150	0	333.5	100
160	0	0	0	0	0	0	0	0	150-160	0	333.5	100
170	0	0	0	0	0	0	0	0	160-170	0	333.5	100
180	0	0	0	0	0	0	0	0	170-180	0	333.5	100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 332.9 lm

%lum = 99.8%

%lamp = 99.8%

Conical surface Flux(120deg): 333.32 lm


%lum = 99.9%

%lamp = 99.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

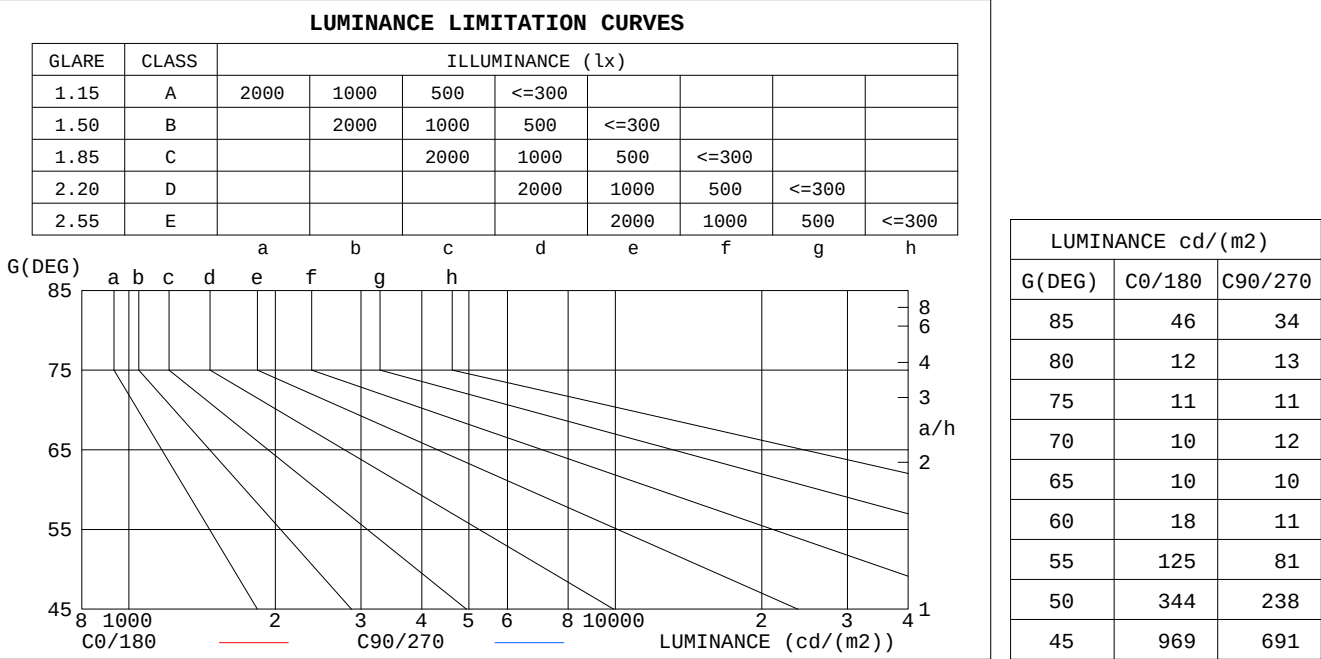

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	.99	.99	.97
2.0	1.09	1.06	1.03	1.07	1.04	1.02	1.04	1.02	1.00	1.01	.99	.98	.98	.97	.96	.95
3.0	1.04	1.01	.98	1.03	1.00	.98	1.01	.98	.96	.98	.96	.95	.96	.95	.93	.92
4.0	1.01	.97	.95	.99	.97	.94	.98	.95	.93	.96	.94	.92	.94	.93	.91	.90
5.0	.98	.94	.91	.97	.93	.91	.95	.92	.90	.94	.91	.89	.92	.90	.89	.88
6.0	.95	.91	.88	.94	.91	.88	.93	.90	.88	.92	.89	.87	.91	.88	.86	.85
7.0	.92	.88	.86	.92	.88	.86	.91	.87	.85	.90	.87	.85	.89	.86	.84	.83
8.0	.90	.86	.84	.89	.86	.83	.89	.85	.83	.88	.85	.83	.87	.84	.83	.82
9.0	.88	.84	.82	.87	.84	.81	.87	.83	.81	.86	.83	.81	.85	.83	.81	.80
10.0	.86	.82	.80	.85	.82	.80	.85	.82	.79	.84	.81	.79	.83	.81	.79	.78

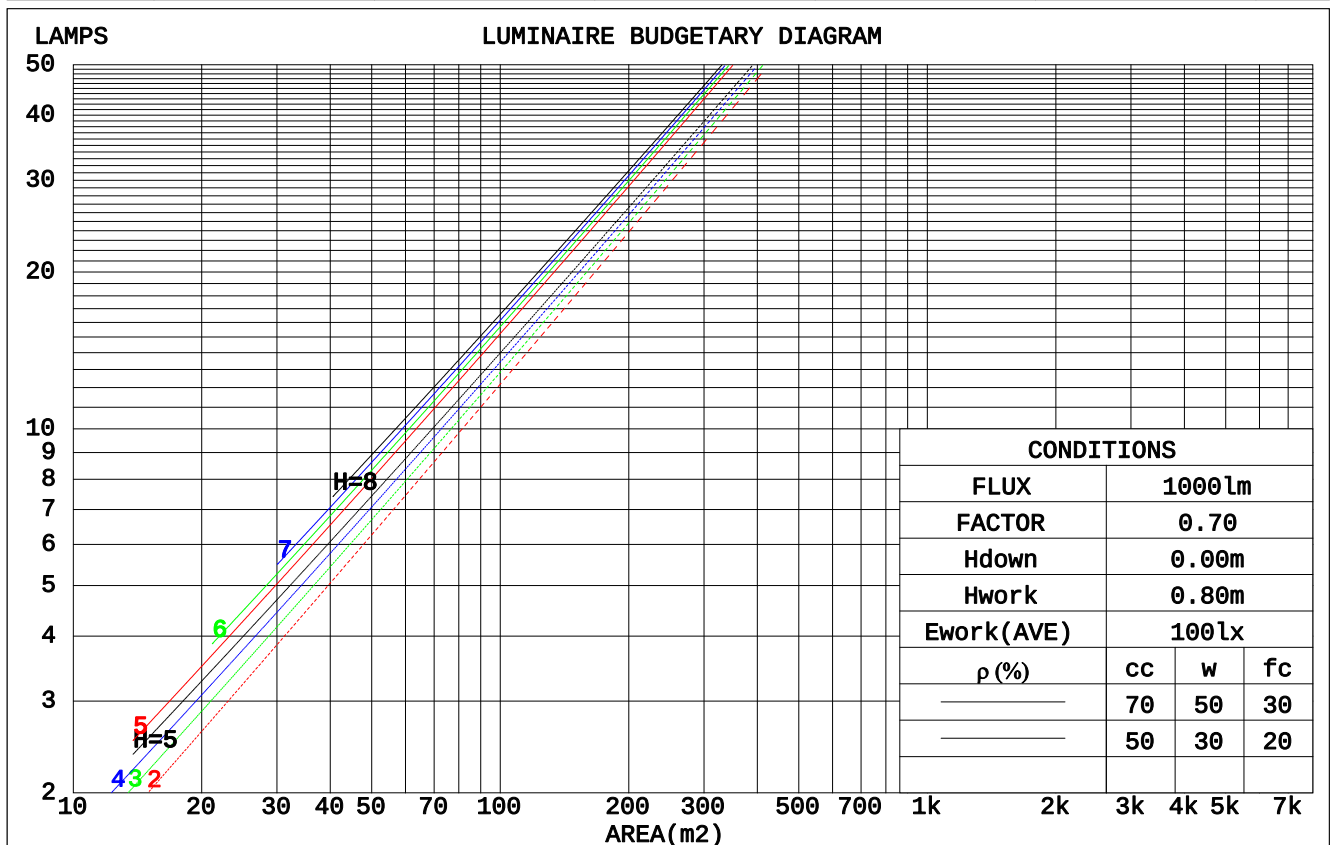

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{FC}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.128	.073	.023	.122	.069	.022	.109	.063	.020	.098	.056	.018	.087	.051	.016		
2.0	.118	.065	.020	.112	.062	.019	.102	.057	.018	.093	.052	.016	.084	.048	.015		
3.0	.109	.058	.017	.105	.056	.017	.096	.052	.016	.088	.048	.015	.081	.045	.014		
4.0	.102	.053	.016	.098	.051	.015	.091	.048	.014	.084	.045	.014	.078	.043	.013		
5.0	.095	.049	.014	.092	.047	.014	.086	.045	.013	.081	.043	.013	.076	.040	.012		
6.0	.090	.045	.013	.087	.044	.013	.082	.042	.012	.077	.040	.012	.073	.038	.011		
7.0	.085	.042	.012	.083	.041	.012	.079	.040	.011	.074	.038	.011	.071	.037	.011		
8.0	.081	.040	.011	.079	.039	.011	.075	.038	.011	.072	.036	.010	.068	.035	.010		
9.0	.077	.037	.010	.076	.037	.010	.072	.036	.010	.069	.035	.010	.066	.034	.010		
10.0	.074	.035	.010	.072	.035	.010	.069	.034	.010	.067	.033	.009	.064	.032	.009		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.144	.135	.128	.098	.093	.089	.057	.054	.051	.018	.017	.017	
2.0	.149	.133	.119	.128	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.097	.114	.098	.084	.079	.068	.059	.045	.040	.035	.015	.013	.011	
4.0	.121	.098	.080	.103	.084	.070	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.110	.085	.067	.094	.074	.058	.065	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.100	.075	.057	.086	.065	.050	.060	.046	.035	.035	.027	.021	.011	.009	.007	
7.0	.093	.067	.049	.080	.058	.042	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.086	.060	.042	.074	.052	.037	.051	.036	.026	.030	.022	.015	.010	.007	.005	
9.0	.080	.054	.037	.069	.047	.032	.048	.033	.023	.028	.019	.014	.009	.006	.004	
10.0	.075	.049	.032	.065	.043	.028	.045	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.7	4.3	3.9	4.4	4.6	2.6	3.2	2.8	3.3	3.5
3H	3.6	4.1	3.8	4.3	4.5	2.5	3.0	2.7	3.2	3.4
4H	3.5	4.0	3.7	4.2	4.4	2.4	2.9	2.6	3.1	3.3
6H	3.4	3.9	3.7	4.1	4.4	2.3	2.8	2.6	3.0	3.3
8H	3.4	3.8	3.6	4.1	4.3	2.3	2.7	2.5	3.0	3.2
12H	3.3	3.8	3.6	4.0	4.3	2.2	2.7	2.5	2.9	3.2
4H 2H	3.5	4.0	3.7	4.2	4.4	2.4	2.9	2.6	3.1	3.3
3H	3.3	3.8	3.6	4.0	4.3	2.2	2.7	2.5	2.9	3.2
4H	3.2	3.6	3.5	3.9	4.2	2.1	2.5	2.5	2.8	3.1
6H	3.1	3.5	3.5	3.8	4.2	2.0	2.4	2.4	2.7	3.1
8H	3.1	3.4	3.4	3.8	4.1	2.0	2.3	2.3	2.7	3.0
12H	3.0	3.3	3.4	3.7	4.1	1.9	2.2	2.3	2.6	3.0
8H 4H	3.1	3.4	3.4	3.8	4.1	2.0	2.3	2.3	2.7	3.0
6H	2.9	3.2	3.4	3.6	4.0	1.8	2.1	2.3	2.5	2.9
8H	2.9	3.1	3.3	3.5	4.0	1.8	2.0	2.2	2.5	2.9
12H	2.8	3.0	3.3	3.5	3.9	1.7	1.9	2.2	2.4	2.8
12H 4H	3.0	3.3	3.4	3.7	4.1	1.9	2.2	2.3	2.6	3.0
6H	2.9	3.1	3.3	3.5	4.0	1.8	2.0	2.2	2.5	2.9
8H	2.8	3.0	3.3	3.5	3.9	1.7	1.9	2.2	2.4	2.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.5 / -22.8					+ 4.1 / -22.4				
1.5H	+ 7.2 / -18.0					+ 6.7 / -17.0				
2.0H	+ 7.8 / -15.2					+ 7.1 / -13.9				

CIE Pub.117, 333.5 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -3.8$)
Area: 0.002 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.467m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	86	82	90	85	82	79
0.80	98	93	90	98	93	90	96	92	89	86
1.00	102	97	94	101	97	93	100	96	93	89
1.25	105	101	98	104	100	97	103	99	97	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

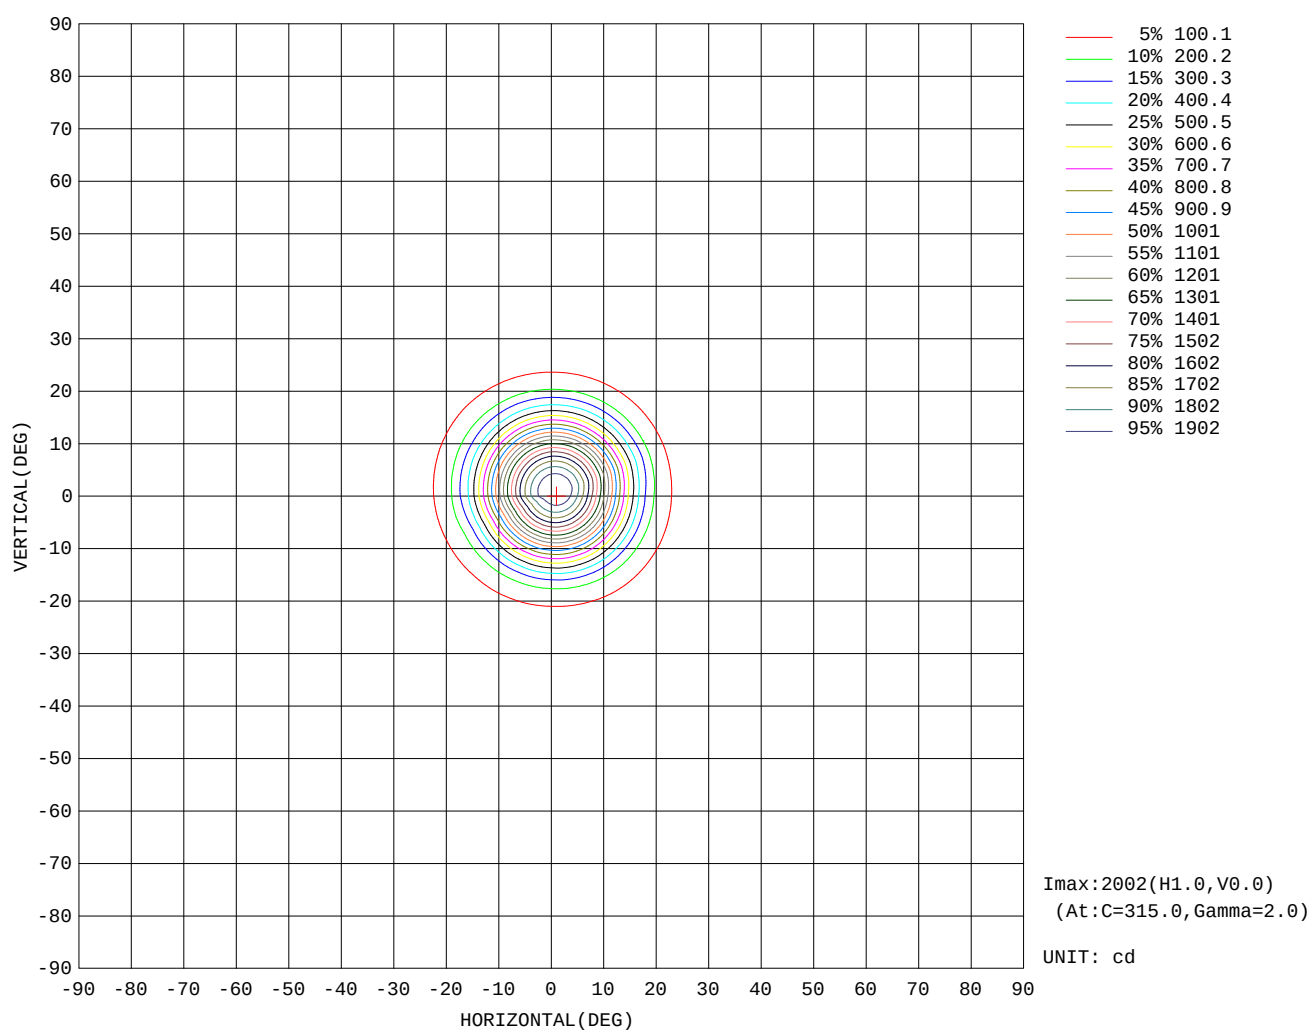

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:


AAI Figure

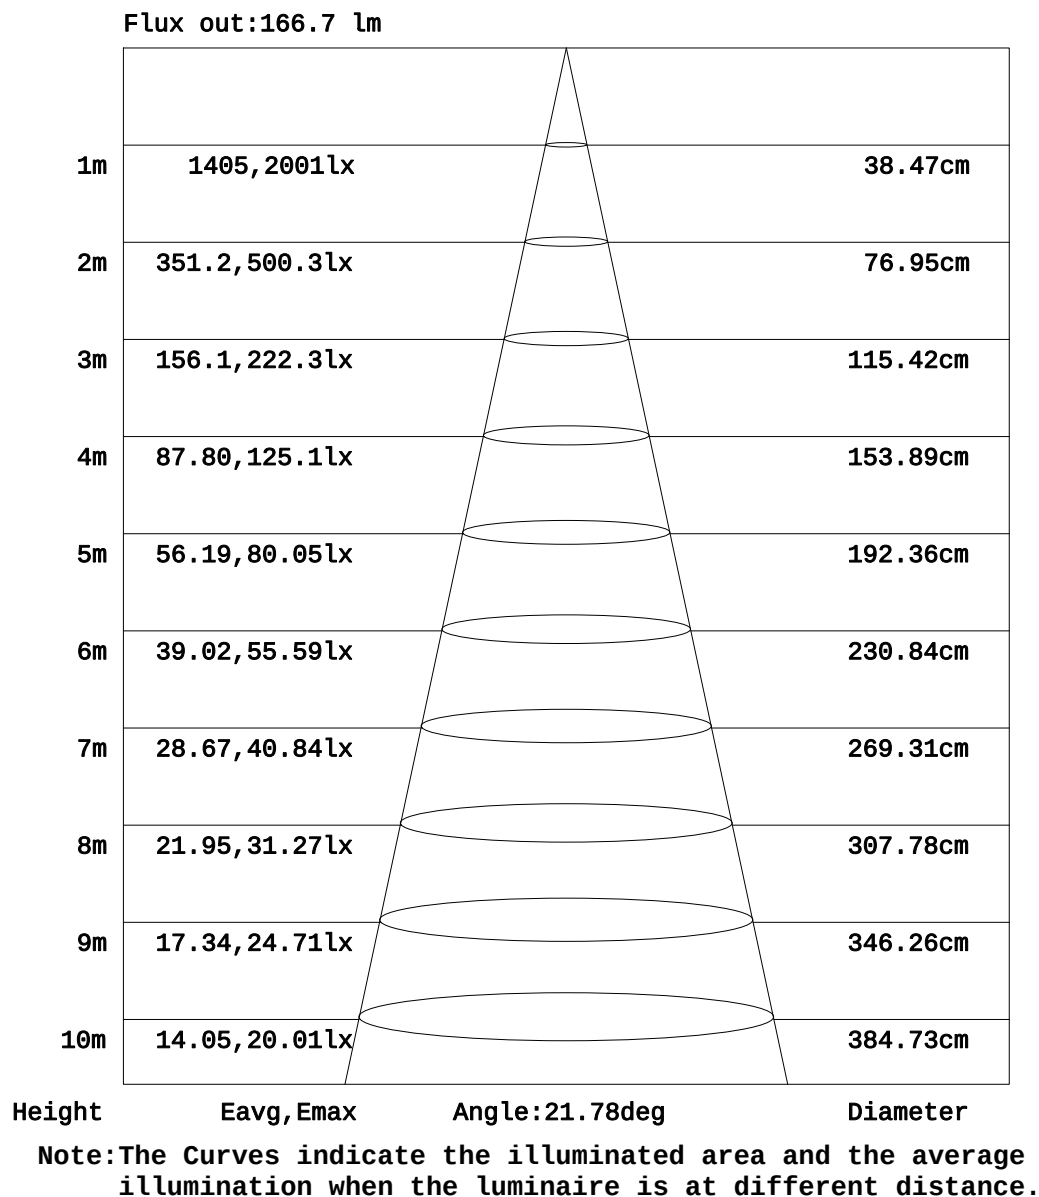

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

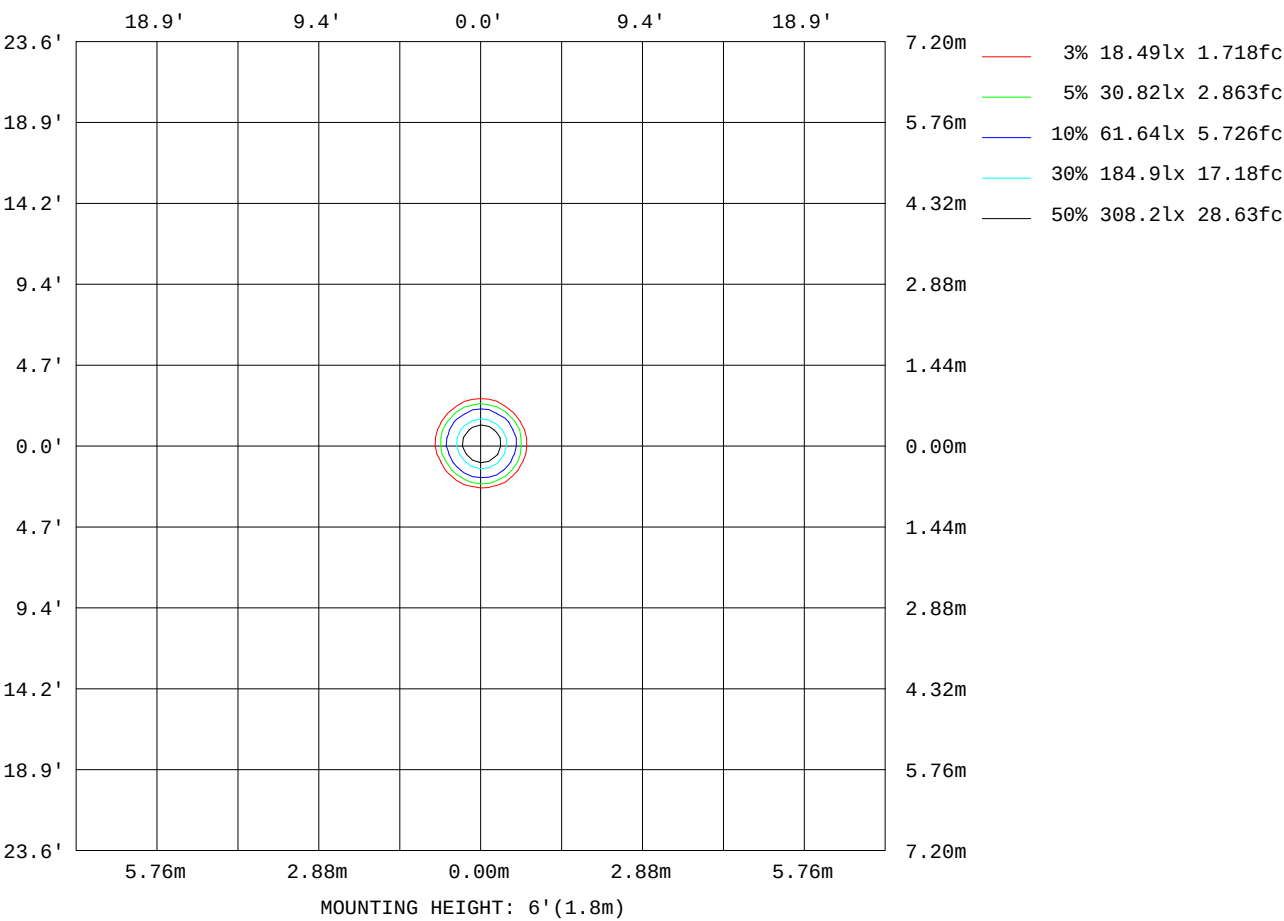

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.15V I:0.0510A P:4.9931W PF:0.4449 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:333.515x1 Lm		
NAME: DDW21-LM04E-230SWT	TYPE: 嵌入式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	97
L_0~180(75)av	172
L_0~180(85)av	30
L_90~270(65)av	101
L_90~270(75)av	176
L_90~270(85)av	27
L_45(65)av	102
L_45(75)av	179
L_45(85)av	27

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.467m [K=1.0000]
 Remarks:

Planar Illuminance Curve

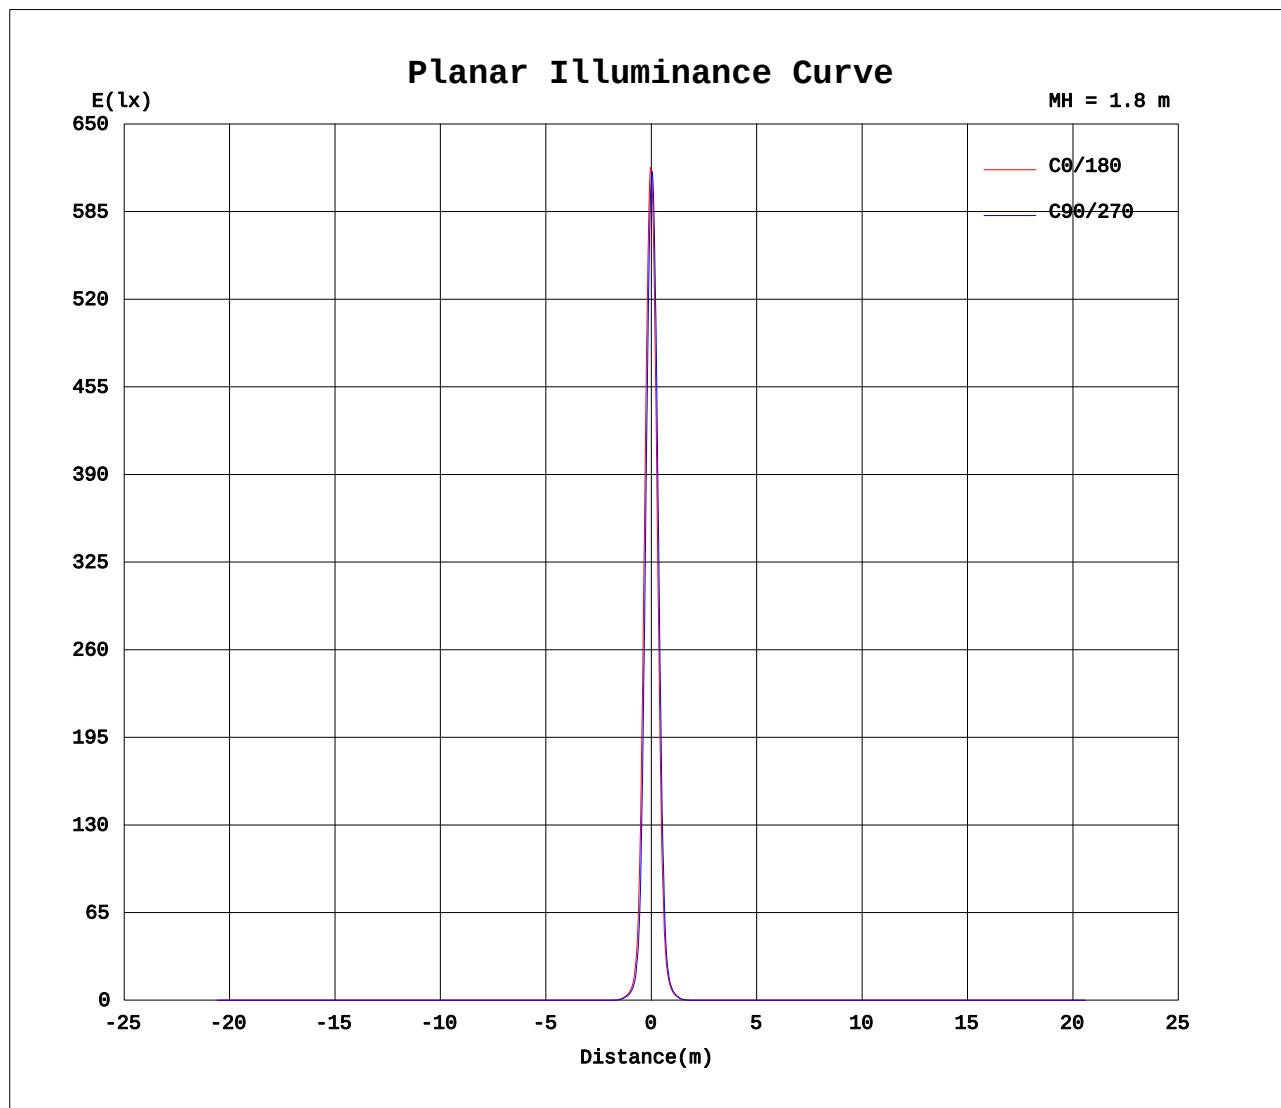

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.467m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980	1980			
5	1786	1735	1684	1643	1607	1589	1589	1607	1679	1723	1769	1815	1854	1877	1882	1867			
10	1199	1134	1065	998	947	925	926	957	1061	1126	1192	1253	1301	1329	1336	1314			
15	558	512	463	414	375	360	367	390	466	519	570	612	641	654	659	645			
20	178	162	146	129	123	121	121	130	159	181	198	210	216	219	221	213			
25	63.4	59.2	53.8	49.5	47.1	46.8	48.7	52.1	61.8	68.5	73.6	76.0	76.7	77.2	75.6	72.9			
30	29.5	27.8	26.0	24.3	23.1	22.9	23.6	24.7	28.8	30.6	32.4	33.4	34.0	34.4	34.1	33.0			
35	15.3	14.5	13.7	12.9	11.9	11.5	11.5	11.9	13.4	14.3	15.3	16.3	16.7	17.2	17.3	16.8			
40	5.25	4.88	4.53	4.04	3.48	3.08	2.86	2.81	3.30	3.49	3.95	4.51	5.03	5.53	5.97	6.12			
45	1.36	1.31	1.18	1.08	0.98	0.96	0.95	0.94	1.05	1.11	1.17	1.22	1.27	1.34	1.42	1.50			
50	0.44	0.39	0.37	0.33	0.31	0.28	0.27	0.27	0.29	0.30	0.31	0.36	0.40	0.43	0.46	0.52			
55	0.14	0.14	0.12	0.11	0.09	0.08	0.08	0.07	0.09	0.10	0.10	0.11	0.12	0.13	0.15	0.16			
60	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.16	0.16	0.16	0.16	0.16	0.17	0.17	0.17			
65	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.16	0.16	0.16	0.16	0.16	0.16	0.17	0.17			
70	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.15			
75	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.17			
80	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.19	0.19	0.19	0.20	0.19	0.19	0.19	0.19			
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2024-09-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.467m [K=1.0000]
 Remarks: