


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.04V I:0.2611A P:56.358W PF:0.9809 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:2388.04x1 lm


NAME: AEP6MI-60ML-F65BK-MIN	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 42.37 lm/W
MODEL		Imax(cd)	30751	S/MH(C0/180)	0.24	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.24	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2388.0	η UP, DN(C0-180)	0.0, 56.8	
NOMINAL FLUX(lm)	2388.04	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 43.1	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220	η down(%)	99.9	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

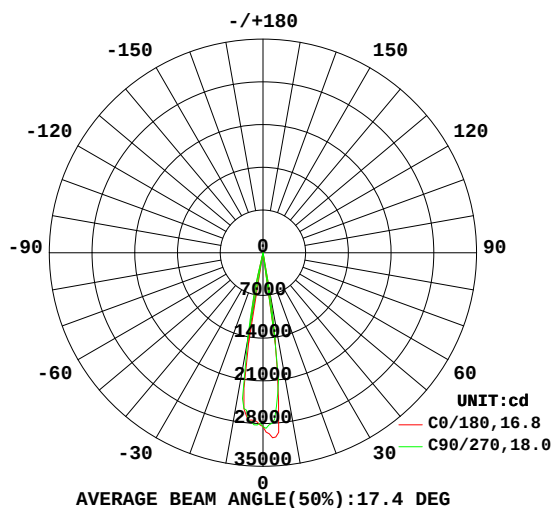

PLANAR ISOLUX DIAGRAM(UNIT:lx)

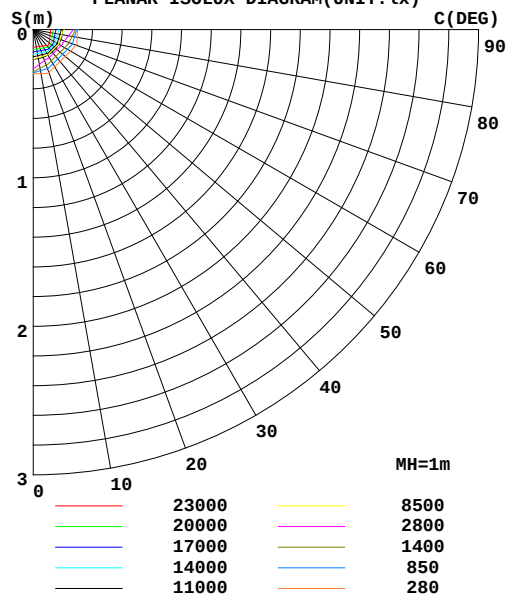

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	1251	1248	1463	994.0	523.4	457.9	512.7	683.3	0- 10	2022	2022	84.7
20	13.01	15.54	12.02	8.297	9.589	11.73	10.99	10.36	10- 20	291.0	2313	96.9
30	4.506	4.989	4.066	3.283	3.643	4.180	3.905	3.788	20- 30	30.70	2344	98.1
40	1.930	2.144	1.781	1.493	1.608	1.829	1.709	1.673	30- 40	16.77	2360	98.8
50	1.021	1.110	0.9428	0.8108	0.8879	0.9832	0.9228	0.9004	40- 50	9.997	2370	99.3
60	0.6039	0.6467	0.5562	0.4831	0.5527	0.6073	0.5707	0.5520	50- 60	6.570	2377	99.5
70	0.3722	0.3995	0.3447	0.3019	0.3415	0.3782	0.3591	0.3461	60- 70	4.505	2381	99.7
80	0.2047	0.2245	0.1936	0.1637	0.1898	0.2001	0.1949	0.1968	70- 80	2.914	2384	99.8
90	0.0101	0.0227	0.0190	0.0026	0.0008	0.0008	0.0007	0.0009	80- 90	1.033	2385	99.9
100	0.0027	0.0019	0.0032	0.0026	0.0008	0.0007	0.0007	0.0008	90-100	0.0173	2385	99.9
110	0.0039	0.0027	0.0055	0.0038	0.0008	0.0009	0.0006	0.0007	100-110	0.0191	2385	99.9
120	0.0045	0.0035	0.0048	0.0042	0.0189	0.0196	0.0206	0.0211	110-120	0.0566	2385	99.9
130	0.0038	0.0034	0.0038	0.0037	0.0029	0.0030	0.0025	0.0022	120-130	0.0357	2385	99.9
140	0.0105	0.0089	0.0101	0.0131	0.0313	0.0385	0.0351	0.0256	130-140	0.0484	2386	99.9
150	0.1434	0.1390	0.1373	0.1412	0.2646	0.2785	0.2780	0.2625	140-150	0.6406	2386	99.9
160	0.1055	0.1064	0.1027	0.0944	0.3812	0.3828	0.3831	0.3823	150-160	1.119	2387	100
170	0.0761	0.0781	0.0816	0.0833	0.2702	0.2631	0.2544	0.2570	160-170	0.6187	2388	100
180	0.0121	0.0172	0.0214	0.0207	0.0224	0.0219	0.0252	0.0263	170-180	0.1161	2388	100
DEG	LUMINOUS INTENSITY:×10cd									UNIT: lm		

Conical surface Flux(90deg): 2365.9 lm

%lum = 99.1%

%lamp = 99.1%

Conical surface Flux(120deg): 2376.9 lm


%lum = 99.5%

%lamp = 99.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

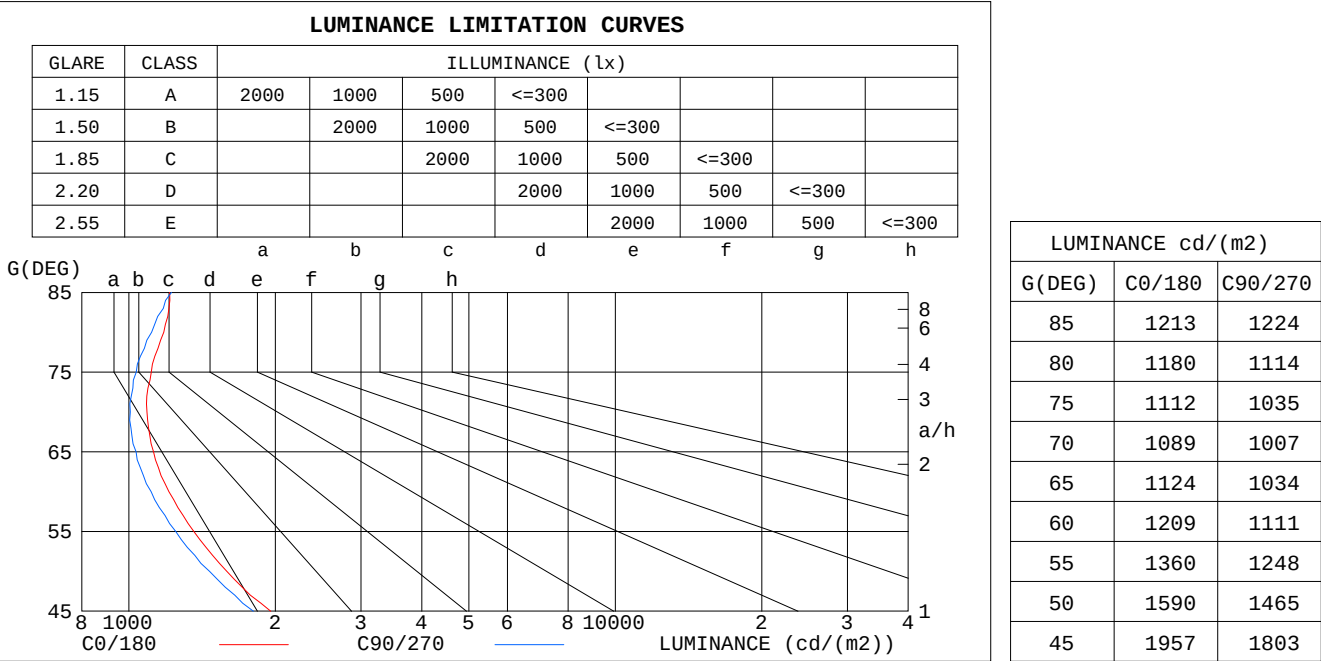


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.15	1.13	1.12	1.12	1.11	1.10	1.09	1.08	1.07	1.05	1.04	1.04	1.02	1.01	1.01	.99
2.0	1.11	1.09	1.07	1.10	1.08	1.06	1.07	1.05	1.04	1.04	1.03	1.02	1.01	1.00	.99	.98
3.0	1.08	1.06	1.04	1.07	1.05	1.03	1.05	1.03	1.02	1.03	1.01	1.00	1.01	.00	.99	.97
4.0	1.06	1.04	1.02	1.05	1.03	1.01	1.03	1.01	.00	1.02	1.00	.99	1.00	.99	.98	.97
5.0	1.04	1.02	.00	1.04	1.01	.99	1.02	1.00	.99	1.01	.99	.98	.00	.98	.97	.96
6.0	1.03	1.00	.98	1.02	.00	.98	1.01	.99	.98	1.00	.98	.97	.99	.98	.96	.96
7.0	1.02	.99	.97	1.01	.99	.97	1.00	.98	.97	.99	.98	.96	.99	.97	.96	.95
8.0	1.01	.98	.96	1.00	.98	.96	.99	.97	.96	.99	.97	.96	.98	.96	.95	.95
9.0	.00	.97	.96	.99	.97	.96	.99	.97	.95	.98	.96	.95	.98	.96	.95	.94
10.0	.99	.97	.95	.99	.96	.95	.98	.96	.95	.98	.96	.94	.97	.95	.94	.94

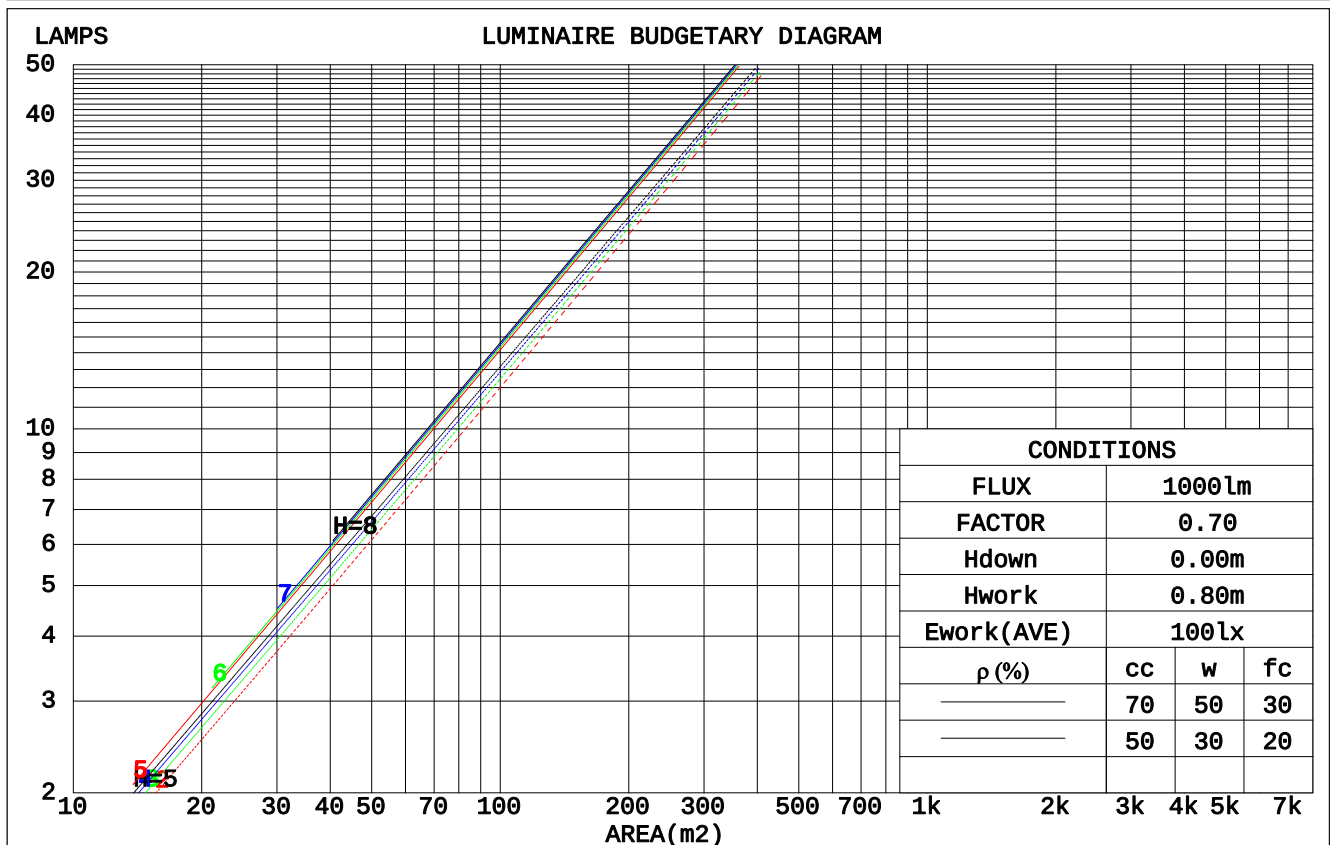

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

WEC AND CCEC

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.104	.059	.019	.097	.055	.018	.085	.049	.016	.074	.042	.014	.063	.037	.012	
2.0	.093	.051	.016	.087	.048	.015	.077	.043	.013	.068	.038	.012	.060	.034	.011	
3.0	.083	.044	.013	.079	.042	.013	.071	.038	.012	.063	.035	.011	.056	.031	.010	
4.0	.076	.039	.012	.072	.038	.011	.065	.035	.010	.059	.032	.010	.053	.029	.009	
5.0	.069	.035	.010	.066	.034	.010	.061	.032	.009	.055	.029	.009	.051	.027	.008	
6.0	.064	.032	.009	.061	.031	.009	.056	.029	.008	.052	.027	.008	.048	.025	.007	
7.0	.059	.029	.008	.057	.028	.008	.053	.027	.008	.049	.025	.007	.046	.024	.007	
8.0	.055	.027	.008	.053	.026	.007	.050	.025	.007	.046	.024	.007	.043	.022	.007	
9.0	.051	.025	.007	.050	.024	.007	.047	.023	.007	.044	.022	.006	.041	.021	.006	
10.0	.048	.023	.006	.047	.023	.006	.044	.022	.006	.042	.021	.006	.040	.020	.006	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.167	.159	.152	.143	.136	.130	.098	.094	.090	.056	.054	.052	.018	.017	.017	
2.0	.147	.134	.123	.126	.115	.106	.086	.080	.074	.050	.046	.043	.016	.015	.014	
3.0	.129	.114	.102	.111	.098	.088	.076	.068	.062	.044	.040	.036	.014	.013	.012	
4.0	.115	.098	.085	.099	.085	.074	.068	.059	.052	.039	.035	.031	.013	.011	.010	
5.0	.103	.085	.072	.088	.074	.063	.061	.051	.044	.035	.030	.026	.011	.010	.009	
6.0	.092	.074	.062	.079	.064	.054	.055	.045	.038	.032	.027	.023	.010	.009	.007	
7.0	.083	.066	.053	.072	.057	.046	.050	.040	.033	.029	.024	.020	.009	.008	.006	
8.0	.076	.058	.046	.065	.051	.040	.045	.036	.029	.026	.021	.017	.009	.007	.006	
9.0	.069	.052	.041	.060	.045	.035	.041	.032	.025	.024	.019	.015	.008	.006	.005	
10.0	.064	.047	.036	.055	.041	.031	.038	.029	.022	.022	.017	.013	.007	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.5	1.9	1.7	2.0	2.2	1.3	1.7	1.4	1.8	1.9
3H	2.5	2.9	2.7	3.0	3.2	2.2	2.6	2.4	2.8	3.0
4H	3.0	3.4	3.2	3.6	3.8	2.7	3.1	3.0	3.3	3.5
6H	3.5	3.9	3.8	4.1	4.3	3.2	3.6	3.5	3.8	4.0
8H	3.7	4.1	4.0	4.3	4.5	3.4	3.8	3.7	4.0	4.3
12H	3.9	4.2	4.2	4.5	4.7	3.6	3.9	3.9	4.2	4.5
4H 2H	1.9	2.3	2.2	2.5	2.7	1.7	2.1	2.0	2.3	2.5
3H	3.1	3.5	3.4	3.7	4.0	2.9	3.3	3.2	3.5	3.8
4H	3.8	4.1	4.1	4.4	4.7	3.6	3.9	3.9	4.2	4.5
6H	4.5	4.7	4.8	5.1	5.4	4.2	4.5	4.6	4.8	5.2
8H	4.7	5.0	5.1	5.4	5.7	4.5	4.8	4.9	5.1	5.5
12H	5.0	5.2	5.4	5.6	6.0	4.7	5.0	5.1	5.3	5.7
8H 4H	4.1	4.3	4.4	4.7	5.0	3.9	4.1	4.2	4.5	4.8
6H	4.9	5.1	5.3	5.5	5.9	4.7	4.9	5.1	5.3	5.7
8H	5.3	5.5	5.7	5.9	6.4	5.1	5.3	5.5	5.7	6.2
12H	5.6	5.8	6.1	6.2	6.7	5.4	5.6	5.9	6.1	6.5
12H 4H	4.1	4.3	4.5	4.7	5.1	3.9	4.1	4.3	4.5	4.9
6H	5.0	5.2	5.4	5.6	6.0	4.8	5.0	5.2	5.4	5.8
8H	5.4	5.6	5.9	6.1	6.5	5.2	5.4	5.7	5.9	6.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.6				

CIE Pub.117, 2388 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.0$)
Area: 0.01 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

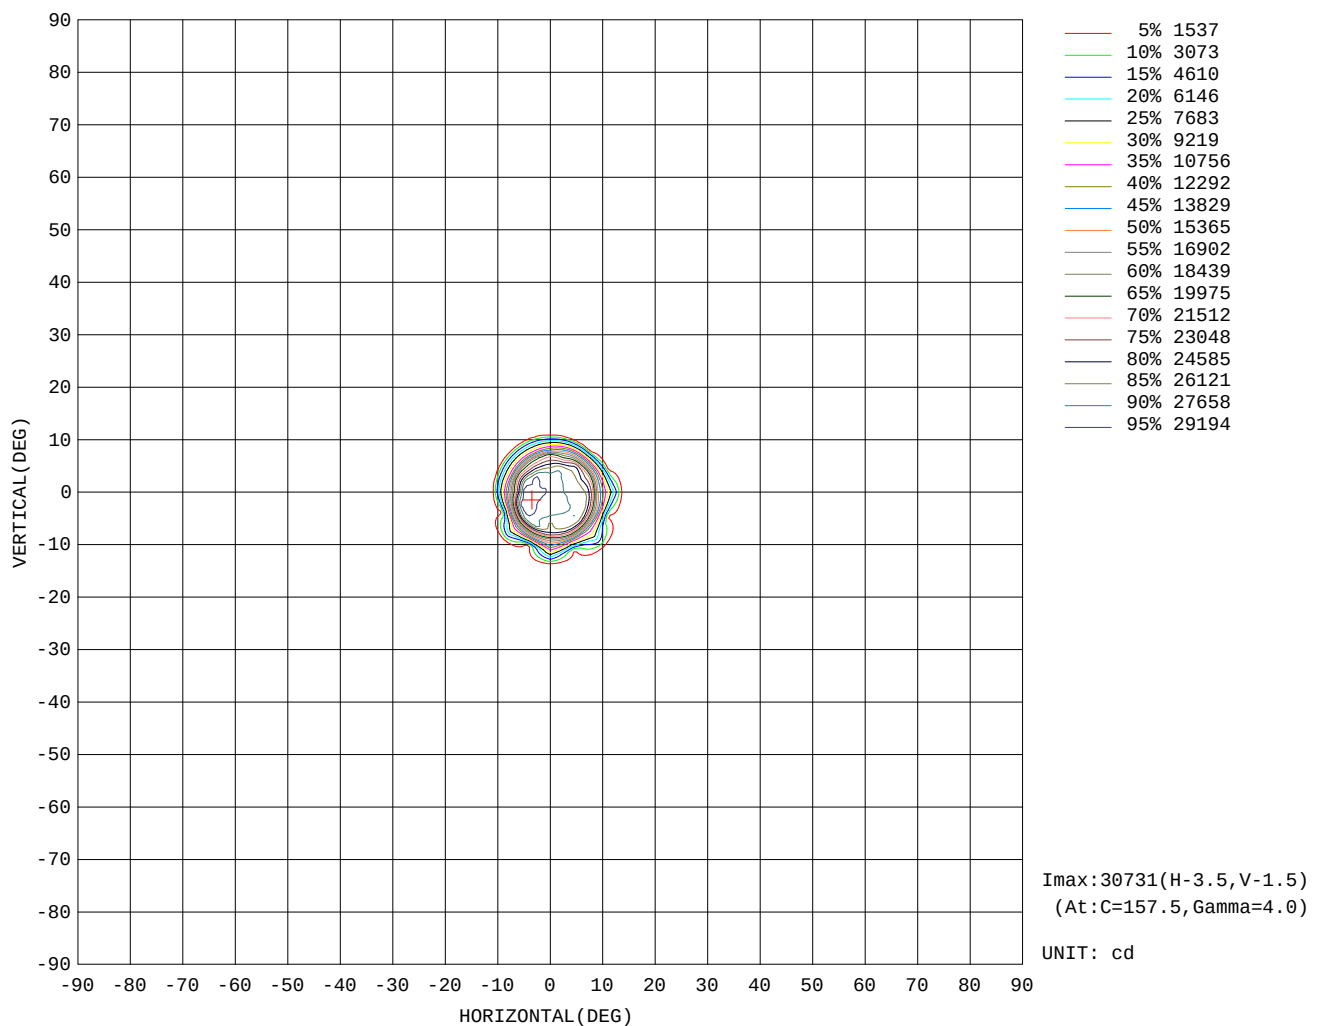

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:

AAI Figure

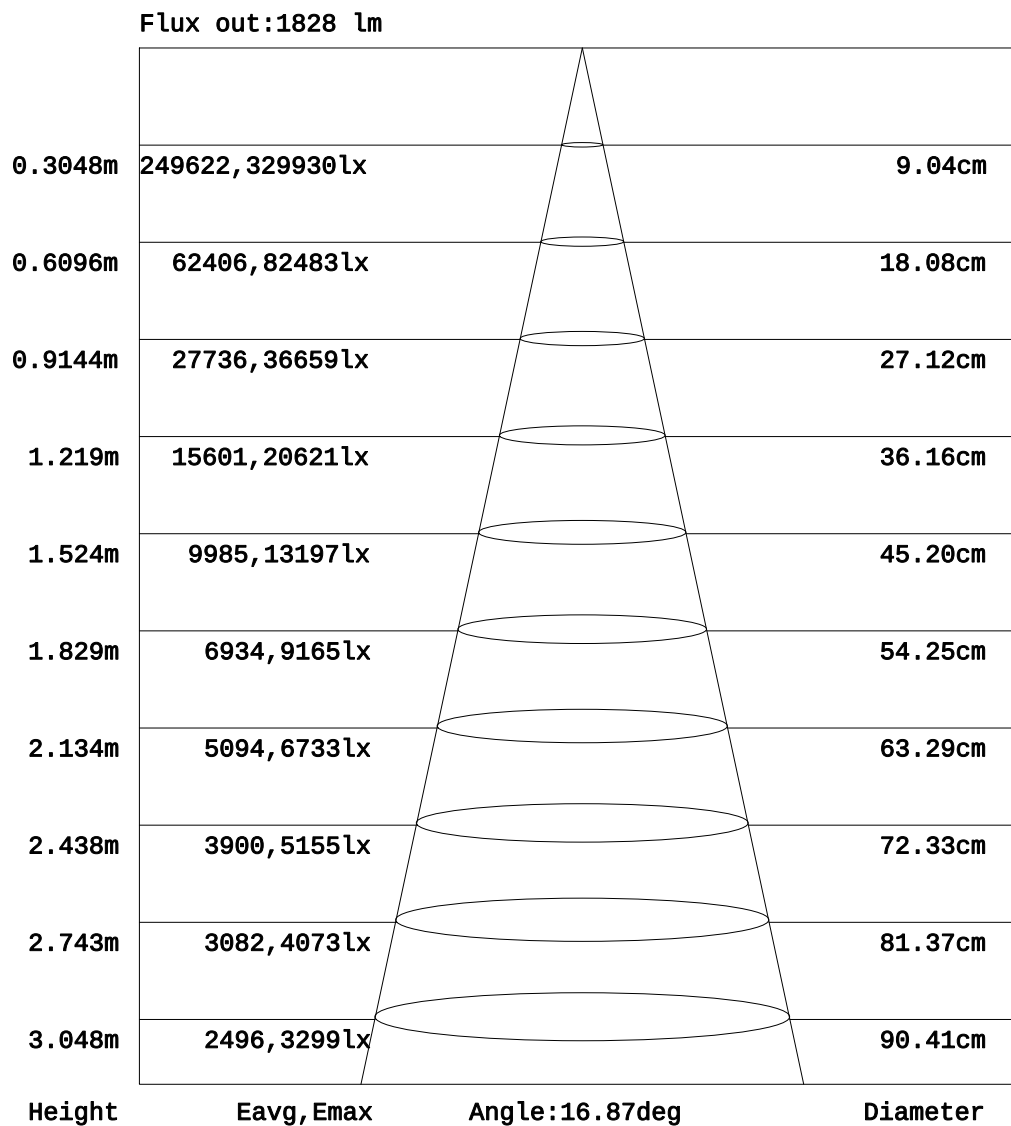


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

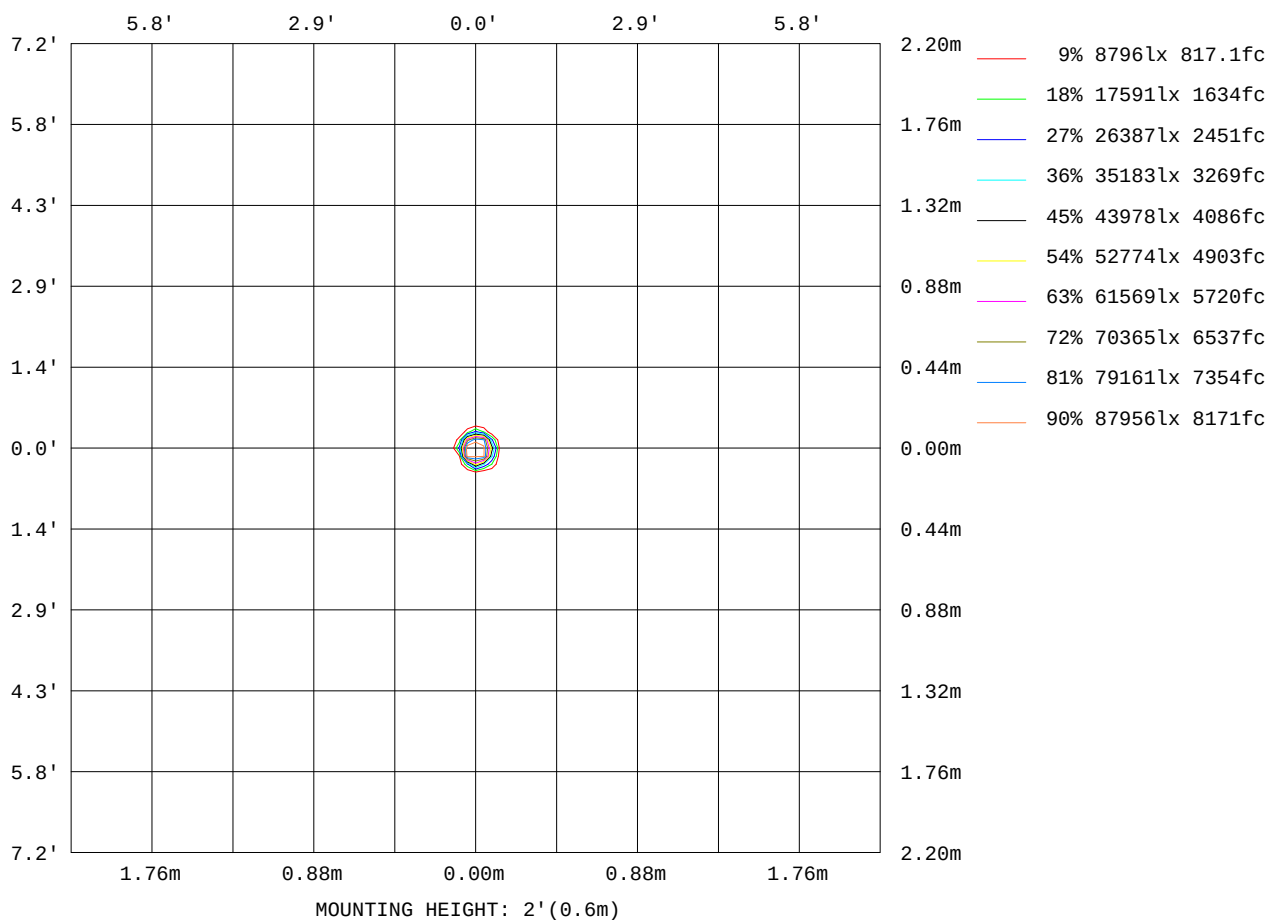

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.04V I:0.2611A P:56.358W PF:0.9809 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:2388.04x1 Lm		
NAME: EP6MI-60ML-F65BK-MIN	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1084
L_0~180(75)av	1071
L_0~180(85)av	1058
L_90~270(65)av	1056
L_90~270(75)av	1059
L_90~270(85)av	1035
L_45(65)av	1070
L_45(75)av	1070
L_45(85)av	1050

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

Planar Illuminance Curve

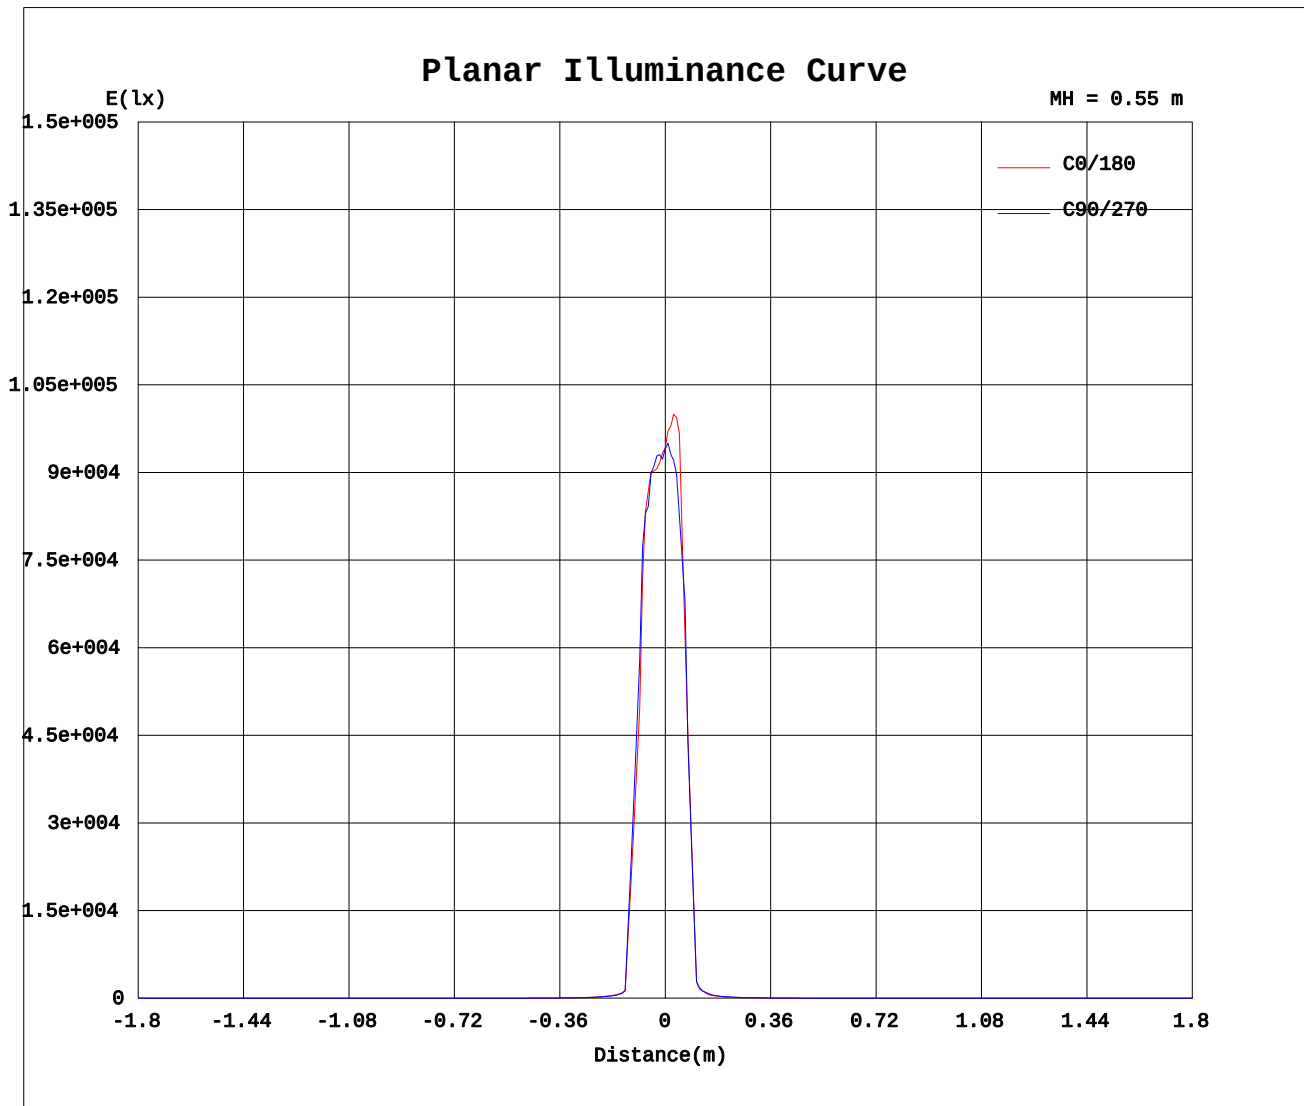

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: ×10cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850	2850			
5	2756	2761	2771	2765	2755	2781	2987	3013	2955	2885	2596	2512	2529	2721	2694	2702			
10	1251	1246	1248	1209	1463	843	994	132	523	463	458	477	513	595	683	1042			
15	32.5	37.3	46.4	39.2	28.1	19.6	17.3	18.7	21.3	24.2	28.8	30.5	27.8	22.9	23.8	31.5			
20	13.0	14.3	15.5	14.9	12.0	9.05	8.30	8.86	9.59	10.8	11.7	12.4	11.0	10.0	10.4	11.7			
25	7.11	7.61	8.17	7.90	6.44	5.32	4.98	5.11	5.55	6.13	6.62	6.86	6.19	5.76	5.92	6.54			
30	4.51	4.77	4.99	4.81	4.07	3.48	3.28	3.33	3.64	3.96	4.18	4.26	3.91	3.69	3.79	4.11			
35	2.88	3.07	3.22	3.08	2.63	2.27	2.14	2.16	2.34	2.56	2.71	2.74	2.52	2.37	2.49	2.68			
40	1.93	2.05	2.14	2.06	1.78	1.56	1.49	1.51	1.61	1.74	1.83	1.85	1.71	1.62	1.67	1.78			
45	1.38	1.46	1.52	1.46	1.28	1.13	1.08	1.09	1.17	1.26	1.32	1.33	1.24	1.18	1.21	1.28			
50	1.02	1.09	1.11	1.07	0.94	0.84	0.81	0.82	0.89	0.95	0.98	0.99	0.92	0.88	0.90	0.95			
55	0.78	0.83	0.84	0.81	0.72	0.65	0.62	0.63	0.68	0.73	0.75	0.76	0.71	0.67	0.69	0.73			
60	0.60	0.64	0.65	0.62	0.56	0.50	0.48	0.49	0.55	0.59	0.61	0.61	0.57	0.54	0.55	0.58			
65	0.47	0.50	0.51	0.49	0.44	0.40	0.38	0.39	0.44	0.47	0.48	0.49	0.45	0.44	0.44	0.46			
70	0.37	0.39	0.40	0.38	0.34	0.31	0.30	0.30	0.34	0.36	0.38	0.38	0.36	0.34	0.35	0.36			
75	0.29	0.31	0.31	0.30	0.27	0.24	0.23	0.23	0.27	0.28	0.29	0.30	0.28	0.27	0.27	0.29			
80	0.20	0.22	0.22	0.22	0.19	0.17	0.16	0.16	0.19	0.20	0.20	0.20	0.19	0.19	0.20	0.21			
85	0.11	0.12	0.12	0.12	0.11	0.09	0.09	0.08	0.08	0.08	0.07	0.07	0.07	0.08	0.09	0.10			
90	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00			
140	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02			
145	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.13	0.14	0.14	0.14	0.14	0.13	0.12	0.12			
150	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.26	0.27	0.28	0.28	0.28	0.27	0.26	0.25			
155	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.35			
160	0.11	0.11	0.11	0.11	0.10	0.10	0.09	0.09	0.38	0.38	0.38	0.38	0.38	0.38	0.38	0.38			
165	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.36	0.36	0.35	0.35	0.35	0.35	0.36	0.36			
170	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.27	0.27	0.26	0.26	0.25	0.25	0.26	0.26			
175	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.15	0.15	0.14	0.13	0.12	0.12	0.12	0.13			
180	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.02			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks: