


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.03V I:0.2627A P:56.967W PF:0.9854 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:333.201x1 lm


NAME: AEP6MI-60ML-FF6BK(RGBW)-MAX	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 5.85 lm/W
MODEL		Imax(cd)	954.5	S/MH(C0/180)	0.62	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.55	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	333.20	η UP, DN(C0-180)	0.1, 54.0	
NOMINAL FLUX(lm)	333.201	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 45.8	
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

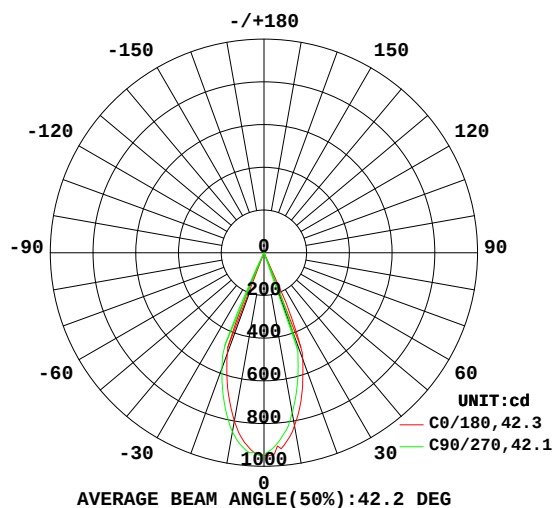

PLANAR ISOLUX DIAGRAM(UNIT:lx)

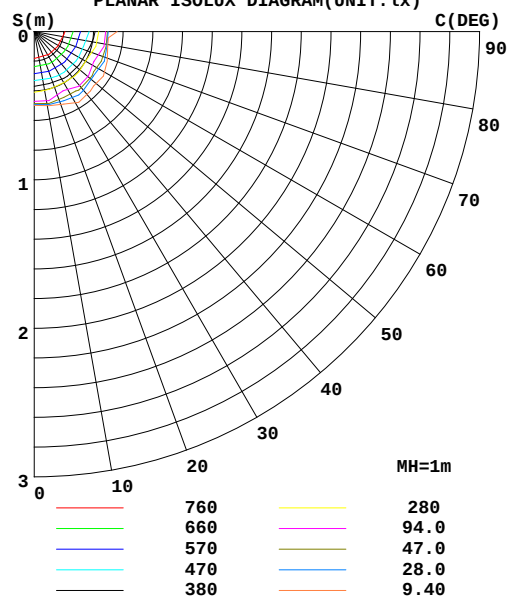

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	800.9	815.6	851.4	802.2	822.4	807.3	761.4	763.7	0- 10	83.40	83.40	25
20	503.0	516.9	577.1	568.9	531.0	516.0	392.7	457.7	10- 20	184.1	267.5	80.3
30	1.234	1.458	1.573	1.537	1.519	1.503	1.369	1.329	20- 30	62.78	330.3	99.1
40	0.7184	0.7428	0.7991	0.8285	0.8332	0.8232	0.7966	0.7685	30- 40	0.6643	331.0	99.3
50	0.4622	0.4549	0.4905	0.5058	0.5055	0.5009	0.4852	0.4757	40- 50	0.4797	331.4	99.5
60	0.3155	0.3085	0.3297	0.3429	0.5082	0.5024	0.4798	0.4741	50- 60	0.3729	331.8	99.6
70	0.2081	0.2038	0.2264	0.2316	0.3685	0.3617	0.3973	0.3929	60- 70	0.3421	332.2	99.7
80	0.1110	0.1102	0.1273	0.1299	0.3139	0.3029	0.3063	0.3046	70- 80	0.2649	332.4	99.8
90	0.0132	0.0172	0.0473	0.0413	0.0266	0	0.0001	0.0001	80- 90	0.0905	332.5	99.8
100	0.0181	0.0124	0.0193	0.0602	0.0508	0	0	0	90-100	0.0128	332.5	99.8
110	0.0258	0.0192	0.0292	0.1722	0.0723	0	0	0	100-110	0.0279	332.6	99.8
120	0.0266	0.0269	0.0627	0.3483	0.2576	0.1947	0.0744	0.0406	110-120	0.0788	332.6	99.8
130	0.0266	0.0273	0.0928	0.4643	0.0936	0.0277	0.0361	0.0329	120-130	0.0760	332.7	99.9
140	0.0663	0.0646	0.1371	0.4326	0.1953	0.1371	0.1492	0.1442	130-140	0.1006	332.8	99.9
150	0.1343	0.1300	0.1843	0.4836	0.3486	0.3116	0.3050	0.2982	140-150	0.1323	332.9	99.9
160	0.1804	0.1901	0.2130	0.2761	0.4523	0.4362	0.3875	0.3764	150-160	0.1351	333.1	100
170	0.2151	0.2307	0.2539	0.2760	0.4394	0.4298	0.3710	0.3400	160-170	0.0915	333.2	100
180	0.2467	0.2355	0.2557	0.2523	0.2443	0.2397	0.2259	0.2539	170-180	0.0273	333.2	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 331.23 lm

%lum = 99.4%

%lamp = 99.4%

Conical surface Flux(120deg): 331.82 lm


%lum = 99.6%

%lamp = 99.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

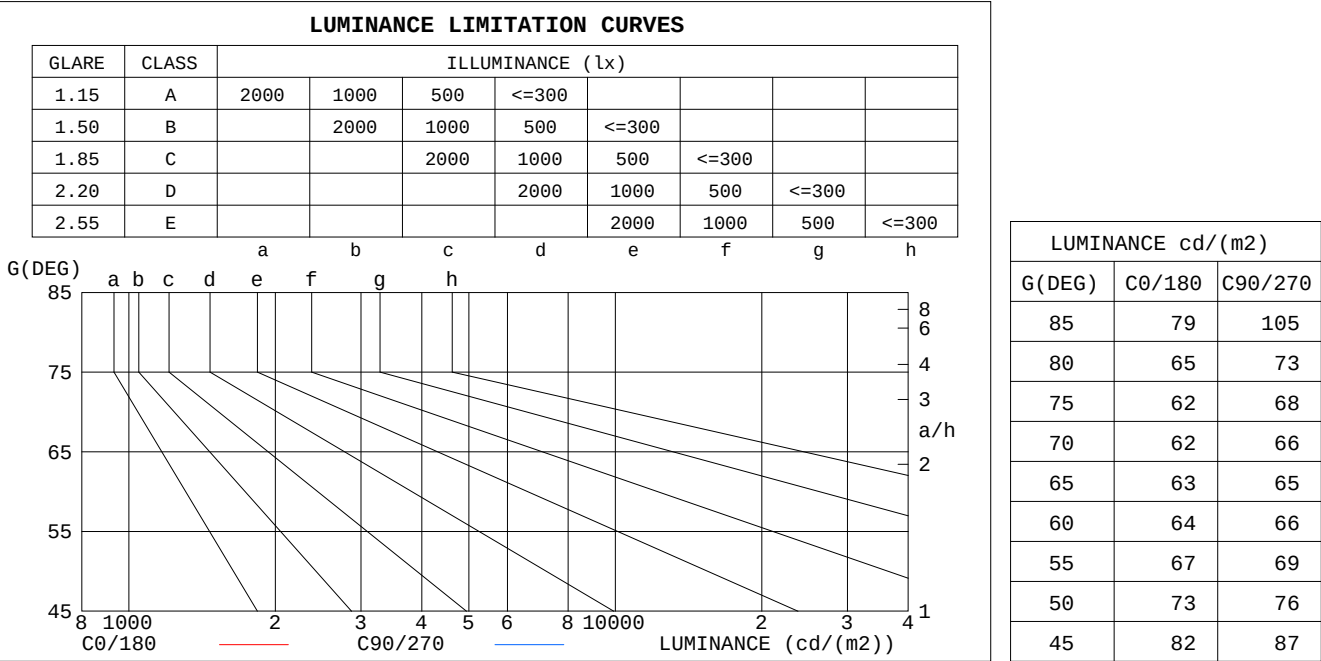


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.02	1.06	1.03	1.00	1.02	1.00	.98	.00	.98	.96	.97	.95	.94	.93
3.0	1.03	.99	.96	1.01	.98	.95	.99	.96	.94	.96	.94	.92	.94	.92	.91	.89
4.0	.98	.94	.91	.97	.94	.91	.95	.92	.90	.93	.91	.89	.92	.89	.88	.86
5.0	.95	.90	.87	.94	.90	.87	.92	.89	.86	.90	.88	.85	.89	.87	.85	.83
6.0	.91	.87	.84	.90	.86	.83	.89	.85	.83	.88	.85	.82	.87	.84	.82	.81
7.0	.88	.84	.81	.87	.83	.80	.86	.83	.80	.85	.82	.80	.84	.81	.79	.78
8.0	.85	.81	.78	.84	.80	.78	.83	.80	.77	.83	.79	.77	.82	.79	.77	.76
9.0	.82	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.79	.76	.74	.73
10.0	.80	.75	.73	.79	.75	.73	.78	.75	.72	.78	.75	.72	.77	.74	.72	.71

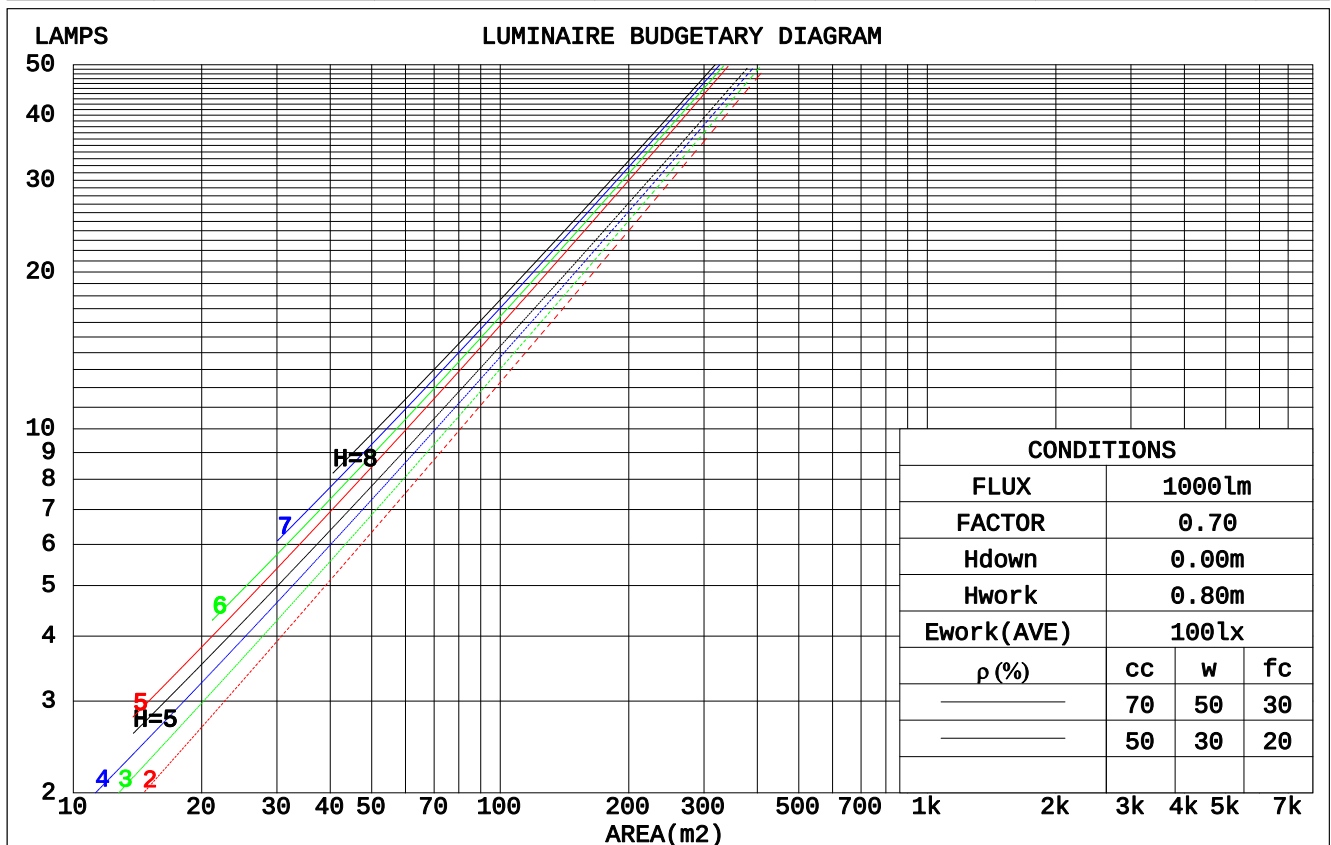

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{CC}	80%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.140	.080	.025	.134	.076	.024	.121	.070	.022	.110	.063	.020	.099	.057	.019		
2.0	.130	.071	.022	.125	.069	.021	.114	.064	.020	.105	.059	.018	.096	.054	.017		
3.0	.121	.065	.019	.117	.063	.019	.108	.059	.018	.100	.055	.017	.093	.051	.016		
4.0	.114	.059	.017	.110	.058	.017	.103	.055	.016	.096	.052	.016	.090	.049	.015		
5.0	.108	.055	.016	.104	.054	.016	.098	.051	.015	.092	.049	.014	.087	.046	.014		
6.0	.102	.051	.015	.099	.050	.014	.094	.048	.014	.089	.046	.014	.084	.044	.013		
7.0	.097	.048	.014	.095	.047	.013	.090	.046	.013	.086	.044	.013	.082	.042	.012		
8.0	.093	.045	.013	.091	.045	.013	.087	.043	.012	.083	.042	.012	.079	.041	.012		
9.0	.089	.043	.012	.087	.043	.012	.084	.041	.012	.080	.040	.011	.077	.039	.011		
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.170	.159	.149	.146	.137	.129	.100	.094	.089	.057	.054	.052	.018	.018	.017	
2.0	.152	.134	.119	.130	.116	.103	.089	.080	.072	.052	.047	.042	.017	.015	.014	
3.0	.137	.115	.097	.118	.099	.084	.081	.069	.059	.047	.040	.035	.015	.013	.011	
4.0	.125	.100	.080	.107	.086	.070	.074	.060	.049	.043	.035	.029	.014	.011	.010	
5.0	.115	.087	.067	.099	.076	.058	.068	.053	.041	.039	.031	.024	.013	.010	.008	
6.0	.106	.077	.057	.091	.067	.049	.063	.047	.035	.037	.028	.021	.012	.009	.007	
7.0	.099	.069	.049	.085	.060	.042	.059	.042	.030	.034	.025	.018	.011	.008	.006	
8.0	.092	.063	.042	.080	.054	.037	.055	.038	.026	.032	.022	.016	.010	.007	.005	
9.0	.087	.057	.037	.075	.049	.032	.052	.035	.023	.030	.021	.014	.010	.007	.005	
10.0	.082	.052	.032	.071	.045	.028	.049	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-13.6	-13.0	-13.4	-12.8	-12.6	-13.5	-12.8	-13.2	-12.6	-12.5
3H	-12.1	-11.5	-11.9	-11.3	-11.1	-11.9	-11.3	-11.7	-11.1	-10.9
4H	-11.4	-10.8	-11.1	-10.6	-10.4	-11.2	-10.6	-10.9	-10.4	-10.2
6H	-10.7	-10.2	-10.5	-10.0	-9.7	-10.4	-9.9	-10.2	-9.7	-9.4
8H	-10.5	-9.9	-10.2	-9.7	-9.4	-10.1	-9.6	-9.8	-9.3	-9.1
12H	-10.2	-9.7	-9.9	-9.4	-9.1	-9.7	-9.2	-9.4	-8.9	-8.7
4H 2H	-13.0	-12.4	-12.8	-12.2	-12.0	-12.9	-12.3	-12.6	-12.1	-11.9
3H	-11.3	-10.8	-11.0	-10.5	-10.3	-11.2	-10.7	-10.9	-10.4	-10.1
4H	-10.5	-10.0	-10.1	-9.7	-9.4	-10.3	-9.8	-10.0	-9.5	-9.2
6H	-9.7	-9.2	-9.3	-8.9	-8.6	-9.4	-9.0	-9.1	-8.7	-8.3
8H	-9.3	-8.9	-8.9	-8.6	-8.2	-9.0	-8.6	-8.6	-8.3	-7.9
12H	-9.0	-8.6	-8.6	-8.2	-7.8	-8.6	-8.2	-8.2	-7.8	-7.4
8H 4H	-10.1	-9.7	-9.7	-9.4	-9.0	-10.0	-9.6	-9.6	-9.3	-8.9
6H	-9.2	-8.8	-8.7	-8.4	-8.0	-9.0	-8.6	-8.5	-8.3	-7.8
8H	-8.7	-8.4	-8.3	-8.0	-7.5	-8.5	-8.2	-8.0	-7.7	-7.3
12H	-8.2	-8.0	-7.8	-7.5	-7.1	-7.9	-7.6	-7.4	-7.2	-6.7
12H 4H	-10.1	-9.7	-9.7	-9.4	-9.0	-10.0	-9.6	-9.6	-9.2	-8.9
6H	-9.1	-8.8	-8.6	-8.4	-7.9	-8.9	-8.6	-8.4	-8.2	-7.7
8H	-8.5	-8.3	-8.1	-7.9	-7.4	-8.3	-8.1	-7.8	-7.6	-7.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.0 / - 0.1					+ 0.1 / - 0.1				
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				

CIE Pub.117, 333.2 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -3.8$)
Area: 0.01 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	90	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	92
1.50	108	103	101	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	105	104	98
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

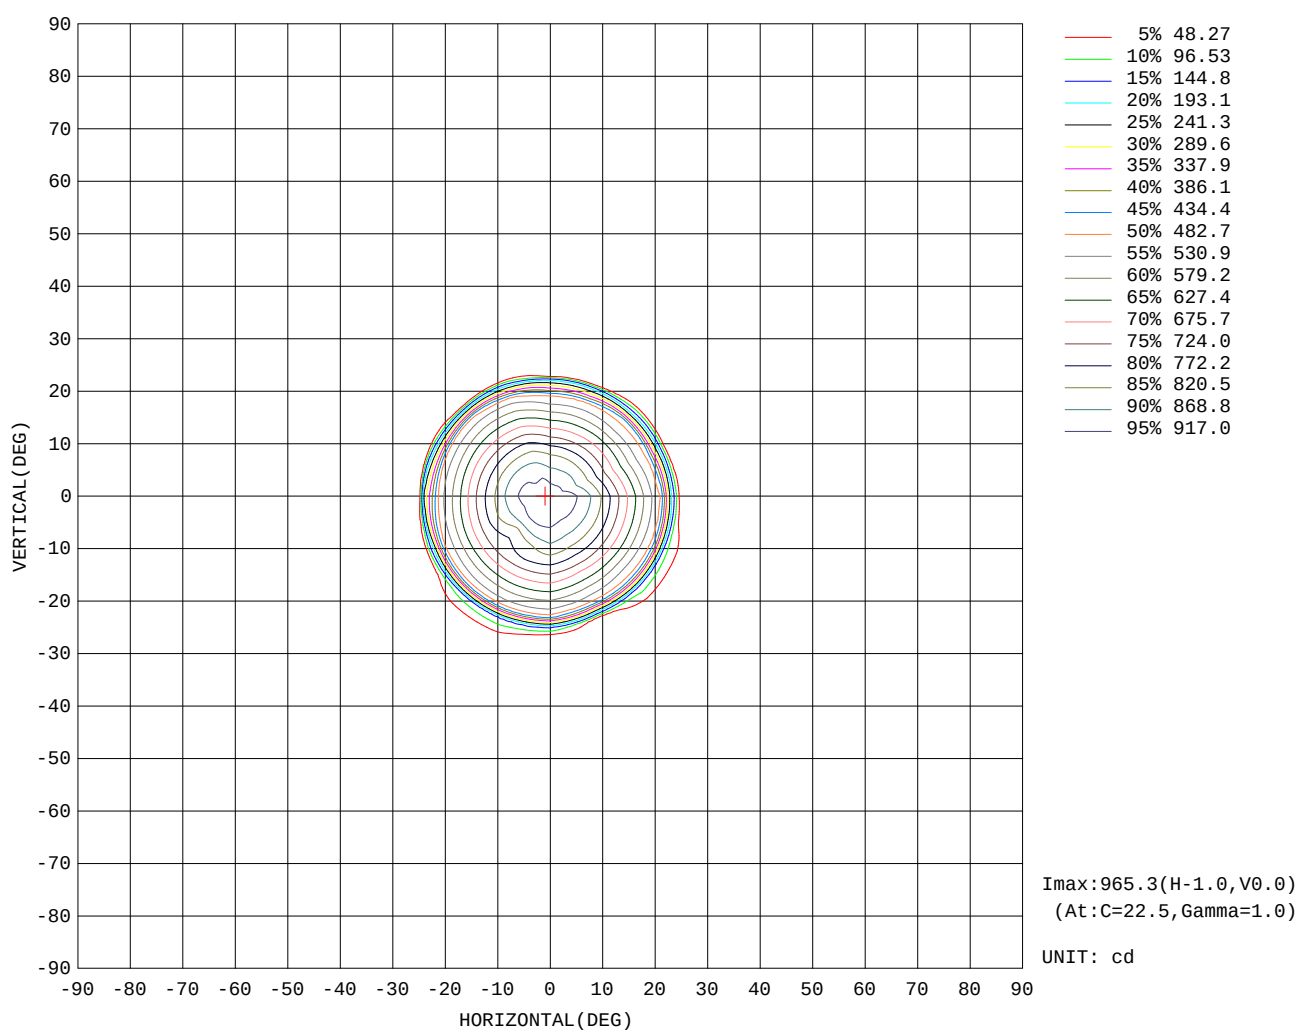

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:

AAI Figure

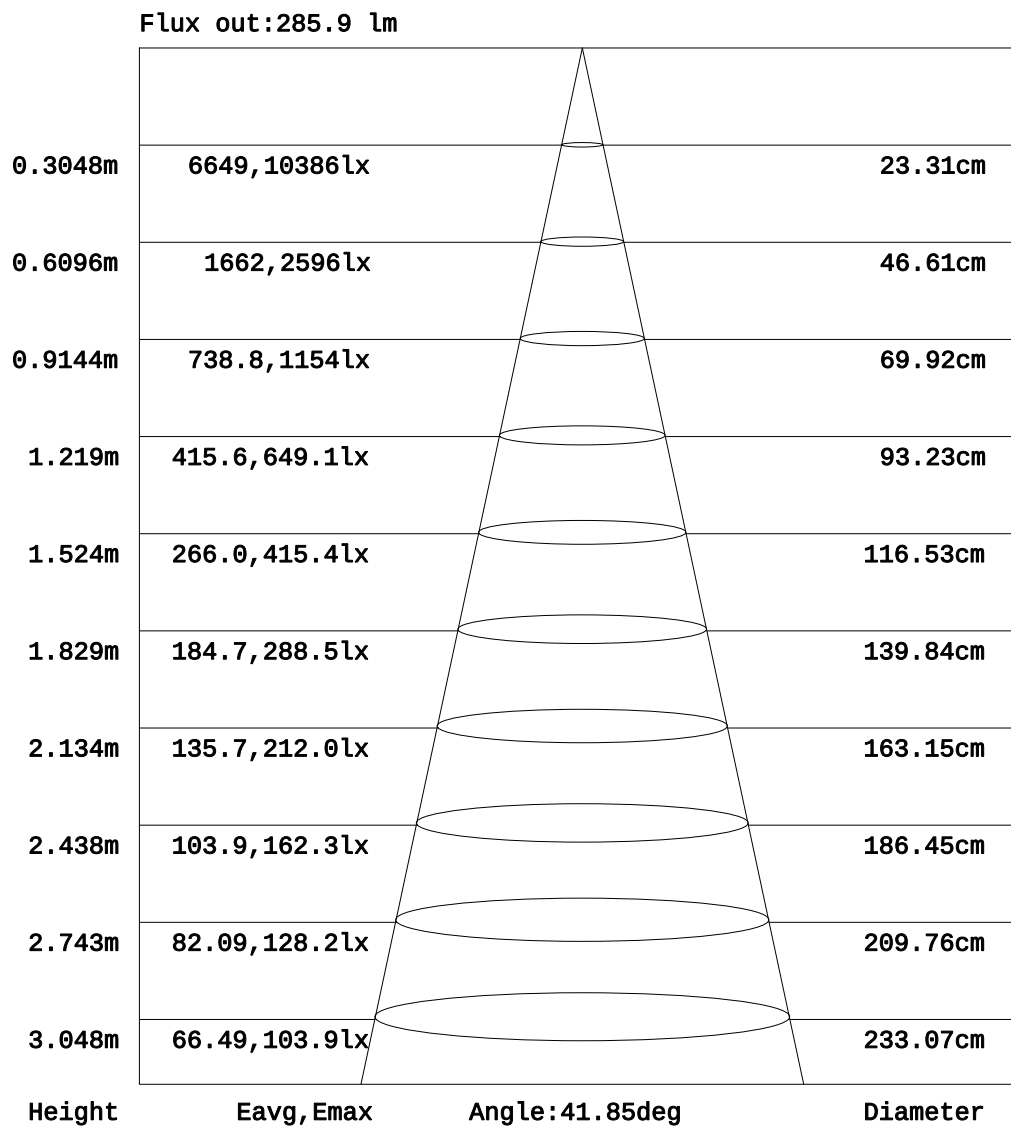


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

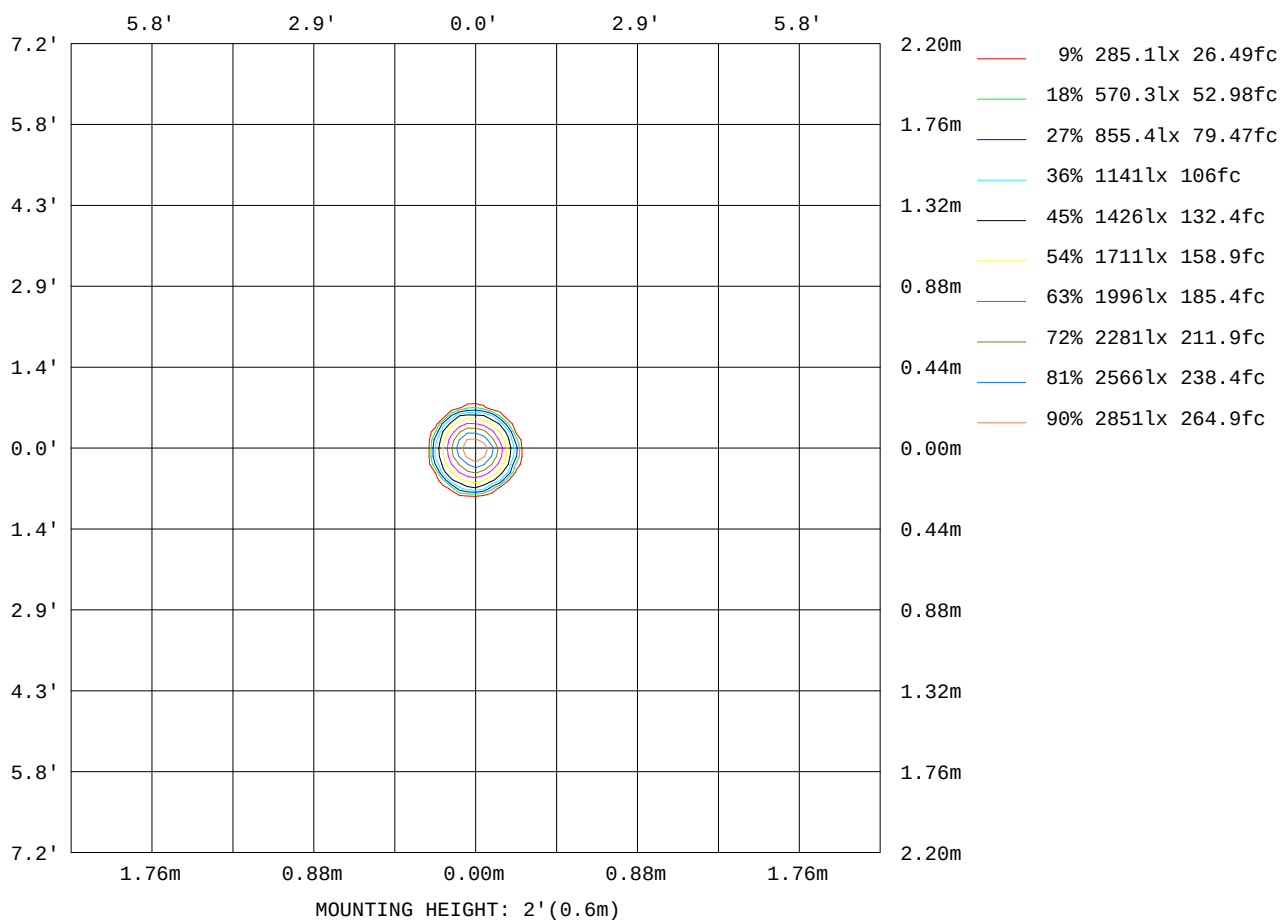

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.03V I:0.2627A P:56.967W PF:0.9854 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:333.201x1 Lm		
NAME: EP6MI-60ML-FF6BK(RGBW)-MAX	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	84
L_0~180(75)av	98
L_0~180(85)av	81
L_90~270(65)av	79
L_90~270(75)av	95
L_90~270(85)av	84
L_45(65)av	81
L_45(75)av	96
L_45(85)av	76

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

Planar Illuminance Curve

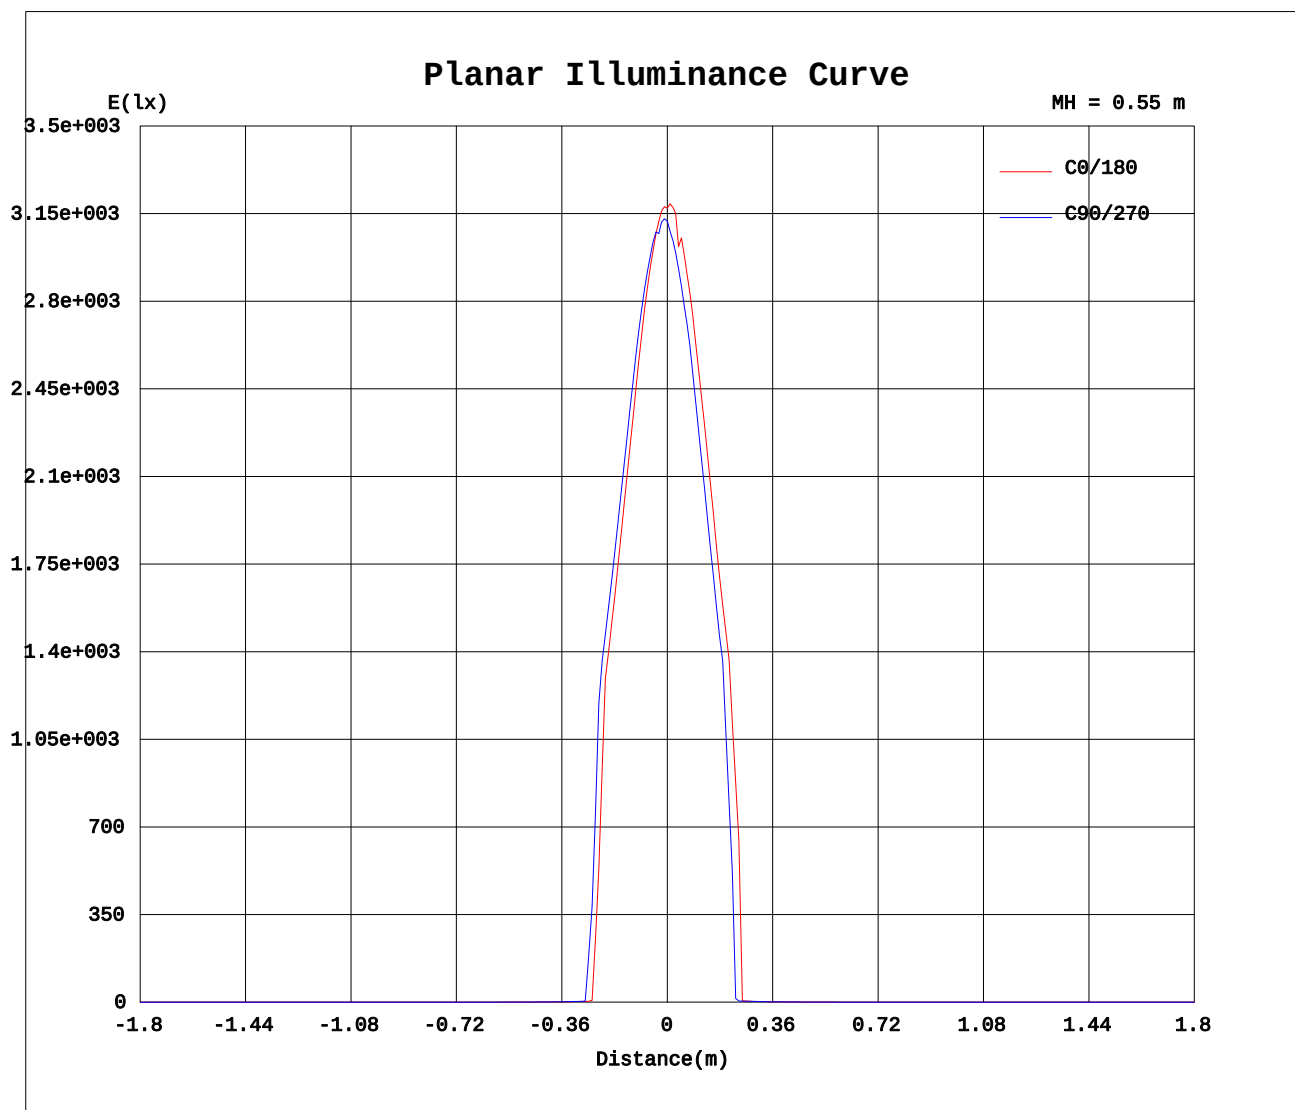

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	946	946	946	946	946	946	946	946	946	946	946	946	946	946	946	946			
5	906	915	914	912	931	932	936	931	921	919	906	894	877	875	886	884			
10	801	812	816	823	851	821	802	844	822	822	807	794	761	759	764	766			
15	658	670	678	684	722	721	720	712	686	681	666	650	611	610	612	619			
20	503	514	517	536	577	577	569	554	531	525	516	500	393	385	458	474			
25	3.26	82.6	99.8	12.1	155	143	117	114	2.39	2.48	2.60	2.30	1.98	1.92	2.00	1.83			
30	1.23	1.29	1.46	1.45	1.57	1.54	1.54	1.58	1.52	1.52	1.50	1.46	1.37	1.34	1.33	1.24			
35	0.94	0.94	1.02	1.01	1.10	1.07	1.11	1.15	1.12	1.14	1.10	1.11	1.06	1.03	1.01	0.96			
40	0.72	0.71	0.74	0.75	0.80	0.80	0.83	0.89	0.83	0.84	0.82	0.82	0.80	0.79	0.77	0.74			
45	0.57	0.56	0.57	0.57	0.62	0.61	0.64	0.72	0.64	0.65	0.64	0.64	0.62	0.62	0.60	0.58			
50	0.46	0.45	0.45	0.46	0.49	0.49	0.51	0.57	0.51	0.51	0.50	0.50	0.49	0.48	0.48	0.46			
55	0.38	0.37	0.37	0.37	0.40	0.40	0.41	0.45	0.40	0.40	0.40	0.40	0.39	0.39	0.39	0.38			
60	0.32	0.31	0.31	0.31	0.33	0.34	0.34	0.36	0.51	0.50	0.50	0.50	0.48	0.48	0.47	0.47			
65	0.26	0.26	0.26	0.26	0.28	0.29	0.29	0.29	0.45	0.45	0.44	0.45	0.39	0.39	0.39	0.38			
70	0.21	0.21	0.20	0.20	0.23	0.24	0.23	0.23	0.37	0.37	0.36	0.36	0.40	0.40	0.39	0.39			
75	0.16	0.16	0.16	0.16	0.18	0.19	0.18	0.18	0.35	0.34	0.34	0.34	0.31	0.32	0.31	0.31			
80	0.11	0.11	0.11	0.11	0.13	0.14	0.13	0.13	0.31	0.31	0.30	0.30	0.31	0.31	0.30	0.30			
85	0.07	0.07	0.07	0.07	0.09	0.09	0.09	0.08	0.07	0.06	0.06	0.06	0.05	0.06	0.05	0.05			
90	0.01	0.02	0.02	0.02	0.05	0.04	0.04	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.04	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.02	0.01	0.01	0.01	0.02	0.03	0.06	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.02	0.01	0.01	0.02	0.02	0.05	0.10	0.10	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.03	0.02	0.02	0.02	0.03	0.07	0.17	0.14	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.03	0.02	0.03	0.03	0.05	0.11	0.27	0.20	0.20	0.14	0.13	0.05	0.11	0.12	0.12	0.04			
120	0.03	0.03	0.03	0.03	0.06	0.16	0.35	0.26	0.26	0.20	0.19	0.20	0.07	0.08	0.04	0.00			
125	0.02	0.02	0.02	0.04	0.08	0.19	0.41	0.32	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.03	0.02	0.03	0.05	0.09	0.21	0.46	0.35	0.09	0.04	0.03	0.03	0.04	0.03	0.03	0.03			
135	0.04	0.04	0.04	0.07	0.12	0.25	0.48	0.35	0.14	0.09	0.07	0.07	0.09	0.08	0.08	0.08			
140	0.07	0.06	0.06	0.09	0.14	0.27	0.43	0.31	0.20	0.15	0.14	0.13	0.15	0.15	0.14	0.14			
145	0.10	0.09	0.10	0.12	0.16	0.29	0.40	0.29	0.26	0.24	0.22	0.21	0.23	0.23	0.22	0.22			
150	0.13	0.14	0.14	0.16	0.18	0.29	0.48	0.27	0.35	0.34	0.31	0.29	0.31	0.30	0.30	0.29			
155	0.16	0.16	0.16	0.18	0.20	0.26	0.38	0.25	0.41	0.41	0.39	0.35	0.35	0.35	0.35	0.34			
160	0.18	0.18	0.19	0.20	0.21	0.25	0.28	0.25	0.45	0.45	0.44	0.40	0.39	0.38	0.38	0.37			
165	0.20	0.20	0.21	0.23	0.23	0.25	0.27	0.27	0.47	0.47	0.45	0.42	0.40	0.39	0.38	0.38			
170	0.22	0.23	0.23	0.25	0.25	0.27	0.28	0.28	0.44	0.44	0.43	0.40	0.37	0.34	0.34	0.34			
175	0.19	0.19	0.21	0.22	0.23	0.24	0.24	0.24	0.36	0.36	0.34	0.32	0.27	0.26	0.26	0.26			
180	0.25	0.24	0.24	0.23	0.26	0.26	0.25	0.26	0.24	0.25	0.24	0.23	0.23	0.24	0.25	0.26			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks: