


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.04V I:0.1462A P:30.160W PF:0.9373 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:260.244x1 lm


NAME: AEP6MI-60ML-FF6BK(W)-MIN	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 8.63 lm/W
MODEL		Imax(cd)	3711	S/MH(C0/180)		0.25
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	260.24	η UP, DN(C0-180)		0.1, 56.8
NOMINAL FLUX(lm)	260.244	CIE CLASS	DIRECT	η UP, DN(C180-360)		0.1, 43.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM		0.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX		1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

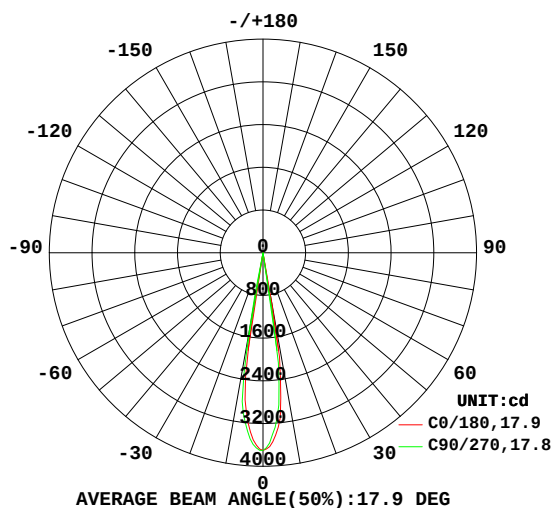

PLANAR ISOLUX DIAGRAM(UNIT: lx)

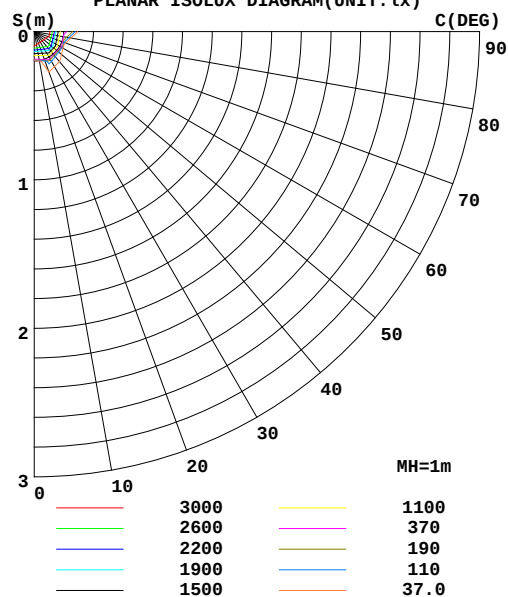

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	842.5	1305	1510	1338	976.7	76.45	65.97	52.00	0- 10	239.4	239.4	92
20	1.562	1.717	1.861	1.805	1.731	1.600	1.958	1.518	10- 20	17.96	257.4	98.9
30	0.9940	1.008	1.077	1.105	1.031	0.9558	1.095	0.9666	20- 30	0.5989	258.0	99.1
40	0.5076	0.5189	0.5506	0.5453	0.5364	0.4979	0.5287	0.5040	30- 40	0.4524	258.4	99.3
50	0.3403	0.3402	0.3631	0.3585	0.3474	0.3285	0.3466	0.3334	40- 50	0.3294	258.8	99.4
60	0.2396	0.2415	0.2527	0.2554	0.4128	0.4010	0.4082	0.4070	50- 60	0.2751	259.0	99.5
70	0.1574	0.1604	0.1710	0.1693	0.3058	0.3001	0.3036	0.3028	60- 70	0.2740	259.3	99.6
80	0.0861	0.0880	0.1018	0.0929	0.2952	0.2842	0.2850	0.2799	70- 80	0.2232	259.5	99.7
90	0.0133	0.0177	0.0255	0.0229	0.0342	0	0.0067	0.0084	80- 90	0.0829	259.6	99.8
100	0.0130	0.0120	0.0124	0.0543	0.0649	0	0	0	90-100	0.0131	259.6	99.8
110	0.0272	0.0197	0.0235	0.1547	0.0795	0	0	0	100-110	0.0283	259.7	99.8
120	0.0272	0.0266	0.0483	0.3193	0.2866	0.1980	0.2060	0.2111	110-120	0.0825	259.7	99.8
130	0.0169	0.0172	0.0730	0.4284	0.1223	0.0017	0	0	120-130	0.0777	259.8	99.8
140	0.0249	0.0192	0.0864	0.3777	0.1269	0.0416	0.0326	0.0300	130-140	0.0609	259.9	99.9
150	0.1781	0.1785	0.2236	0.3891	0.3736	0.3512	0.3176	0.3138	140-150	0.1102	260.0	99.9
160	0.1220	0.1347	0.1625	0.2152	0.5248	0.5211	0.4579	0.4499	150-160	0.1518	260.1	100
170	0.0926	0.1085	0.1254	0.1519	0.3969	0.3854	0.3293	0.2961	160-170	0.0830	260.2	100
180	0.0129	0.0087	0.0112	0.0344	0.0272	0.0240	0.0154	0.0171	170-180	0.0161	260.2	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 258.61 lm

%lum = 99.4%

%lamp = 99.4%

Conical surface Flux(120deg): 259.04 lm


%lum = 99.5%

%lamp = 99.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:


LUMINANCE LIMITATION CURVES

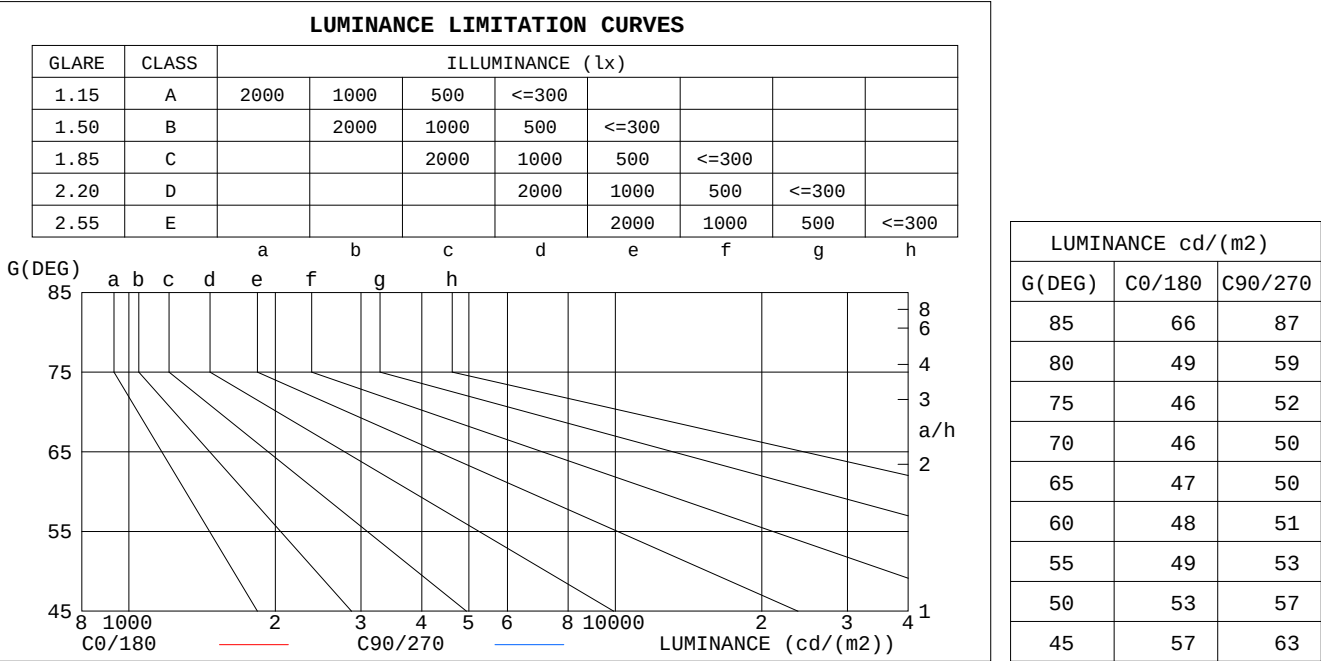

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Temperature:25.3DEG	Humidity:65.0%
Operators:Oliver	Test Distance:2.487m [K=1.0000]
Test Date:2026-06-01	Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.15	1.14	1.12	1.13	1.12	1.10	1.09	1.08	1.07	1.05	1.05	1.04	1.02	1.01	1.01	.99
2.0	1.12	1.10	1.08	1.10	1.08	1.07	1.07	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.00	.99
3.0	1.09	1.07	1.05	1.08	1.06	1.04	1.06	1.04	1.03	1.04	1.02	1.01	1.02	1.01	.00	.99
4.0	1.07	1.05	1.03	1.06	1.04	1.02	1.05	1.03	1.01	1.03	1.01	1.00	1.01	1.00	.99	.98
5.0	1.06	1.03	1.02	1.05	1.03	1.01	1.04	1.02	1.00	1.02	1.01	.00	1.01	.00	.99	.98
6.0	1.05	1.02	1.01	1.04	1.02	1.00	1.03	1.01	.00	1.02	1.00	.99	1.01	.99	.98	.98
7.0	1.04	1.01	.00	1.03	1.01	.99	1.02	1.00	.99	1.01	.00	.99	1.01	.99	.98	.97
8.0	1.03	1.01	.99	1.02	1.00	.99	1.02	.00	.99	1.01	.99	.98	1.00	.99	.98	.97
9.0	1.02	.00	.98	1.02	.00	.98	1.01	.99	.98	1.01	.99	.98	1.00	.99	.98	.97
10.0	1.02	.99	.98	1.01	.99	.98	1.01	.99	.98	1.00	.99	.98	.00	.98	.97	.97

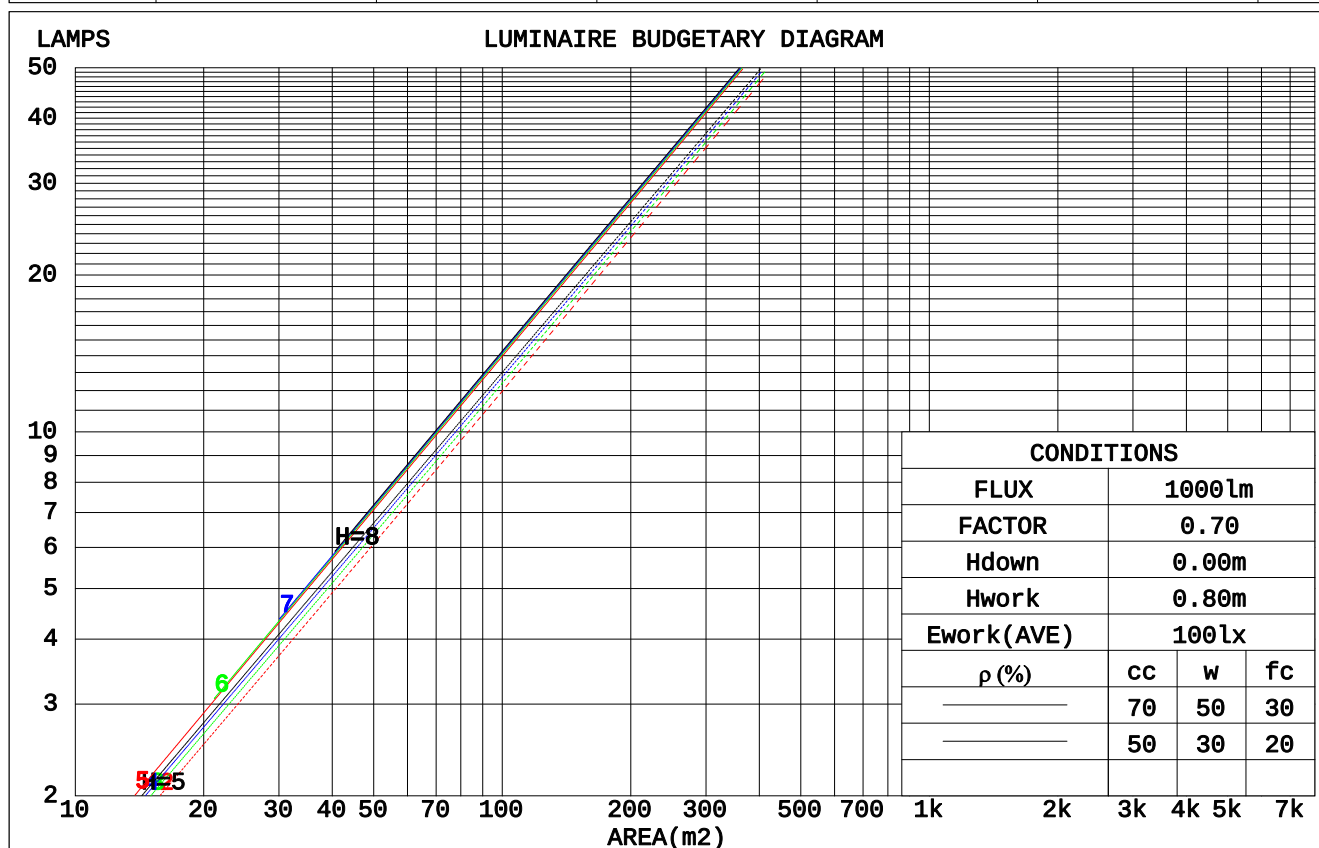

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

WEC AND CCEC

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.098	.056	.018	.091	.052	.017	.079	.045	.014	.068	.039	.013	.057	.033	.011	
2.0	.087	.048	.015	.081	.045	.014	.071	.040	.012	.062	.035	.011	.054	.030	.010	
3.0	.077	.041	.012	.073	.039	.012	.065	.035	.011	.058	.032	.010	.051	.028	.009	
4.0	.070	.036	.011	.066	.035	.010	.060	.032	.009	.053	.029	.009	.048	.026	.008	
5.0	.063	.032	.009	.061	.031	.009	.055	.029	.008	.050	.026	.008	.045	.024	.007	
6.0	.058	.029	.008	.056	.028	.008	.051	.026	.008	.047	.024	.007	.042	.022	.007	
7.0	.053	.026	.007	.051	.026	.007	.047	.024	.007	.044	.022	.007	.040	.021	.006	
8.0	.049	.024	.007	.048	.023	.007	.044	.022	.006	.041	.021	.006	.038	.020	.006	
9.0	.046	.022	.006	.045	.022	.006	.042	.021	.006	.039	.020	.006	.036	.018	.005	
10.0	.043	.021	.006	.042	.020	.006	.039	.019	.005	.037	.018	.005	.035	.017	.005	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.167	.160	.153	.143	.137	.132	.098	.094	.091	.056	.055	.053	.018	.018	.017	
2.0	.147	.135	.125	.126	.116	.108	.086	.080	.075	.050	.047	.044	.016	.015	.014	
3.0	.129	.115	.103	.111	.099	.090	.076	.069	.063	.044	.040	.037	.014	.013	.012	
4.0	.115	.099	.087	.098	.085	.075	.068	.060	.053	.039	.035	.031	.013	.011	.010	
5.0	.102	.086	.074	.088	.074	.064	.060	.052	.045	.035	.030	.027	.011	.010	.009	
6.0	.091	.075	.063	.079	.065	.055	.054	.046	.039	.031	.027	.023	.010	.009	.008	
7.0	.082	.066	.055	.071	.057	.048	.049	.040	.034	.028	.024	.020	.009	.008	.007	
8.0	.075	.059	.048	.064	.051	.042	.044	.036	.030	.026	.021	.018	.008	.007	.006	
9.0	.068	.053	.042	.059	.046	.037	.041	.032	.026	.024	.019	.016	.008	.006	.005	
10.0	.062	.047	.037	.054	.041	.033	.037	.029	.023	.022	.017	.014	.007	.006	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-14.7	-14.4	-14.6	-14.2	-14.1	-14.4	-14.0	-14.2	-13.9	-13.7
3H	-13.2	-12.8	-12.9	-12.6	-12.5	-12.8	-12.4	-12.6	-12.3	-12.1
4H	-12.4	-12.1	-12.2	-11.9	-11.7	-12.0	-11.7	-11.8	-11.5	-11.3
6H	-11.8	-11.4	-11.5	-11.2	-11.0	-11.3	-10.9	-11.0	-10.7	-10.5
8H	-11.5	-11.1	-11.2	-10.9	-10.7	-10.9	-10.6	-10.6	-10.3	-10.1
12H	-11.1	-10.8	-10.9	-10.6	-10.3	-10.4	-10.1	-10.2	-9.9	-9.6
4H 2H	-14.0	-13.7	-13.8	-13.5	-13.3	-13.7	-13.4	-13.5	-13.2	-13.0
3H	-12.3	-12.0	-12.0	-11.7	-11.4	-12.0	-11.7	-11.7	-11.4	-11.2
4H	-11.4	-11.1	-11.1	-10.8	-10.5	-11.1	-10.8	-10.8	-10.5	-10.2
6H	-10.6	-10.3	-10.3	-10.0	-9.7	-10.2	-10.0	-9.9	-9.6	-9.3
8H	-10.3	-10.0	-9.9	-9.7	-9.3	-9.8	-9.5	-9.4	-9.2	-8.8
12H	-9.9	-9.6	-9.5	-9.3	-8.9	-9.3	-9.0	-8.9	-8.7	-8.3
8H 4H	-11.1	-10.8	-10.7	-10.5	-10.1	-10.8	-10.6	-10.4	-10.2	-9.9
6H	-10.1	-9.9	-9.7	-9.5	-9.1	-9.8	-9.6	-9.3	-9.2	-8.7
8H	-9.6	-9.4	-9.2	-9.0	-8.6	-9.2	-9.0	-8.8	-8.6	-8.2
12H	-9.1	-8.9	-8.6	-8.5	-8.0	-8.6	-8.4	-8.1	-7.9	-7.5
12H 4H	-11.1	-10.8	-10.7	-10.5	-10.1	-10.8	-10.6	-10.4	-10.2	-9.8
6H	-10.0	-9.8	-9.6	-9.4	-8.9	-9.7	-9.5	-9.2	-9.1	-8.6
8H	-9.4	-9.3	-9.0	-8.8	-8.4	-9.1	-8.9	-8.6	-8.5	-8.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.3				

CIE Pub.117, 260.2 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -4.7$)
Area: 0.01 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	90	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

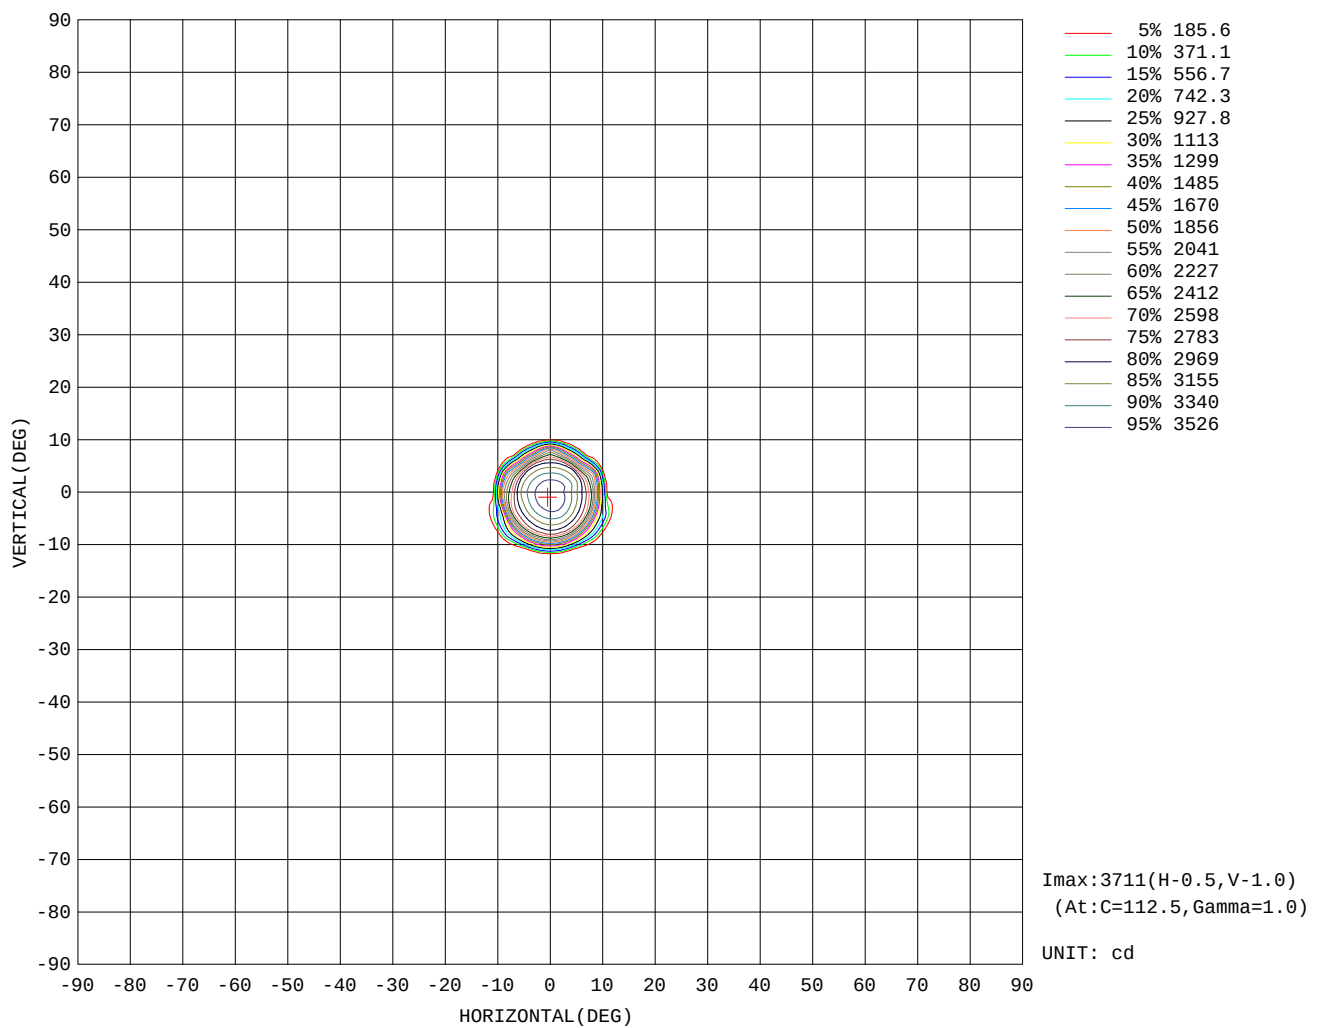

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.487m [K=1.0000]
Remarks:

AAI Figure

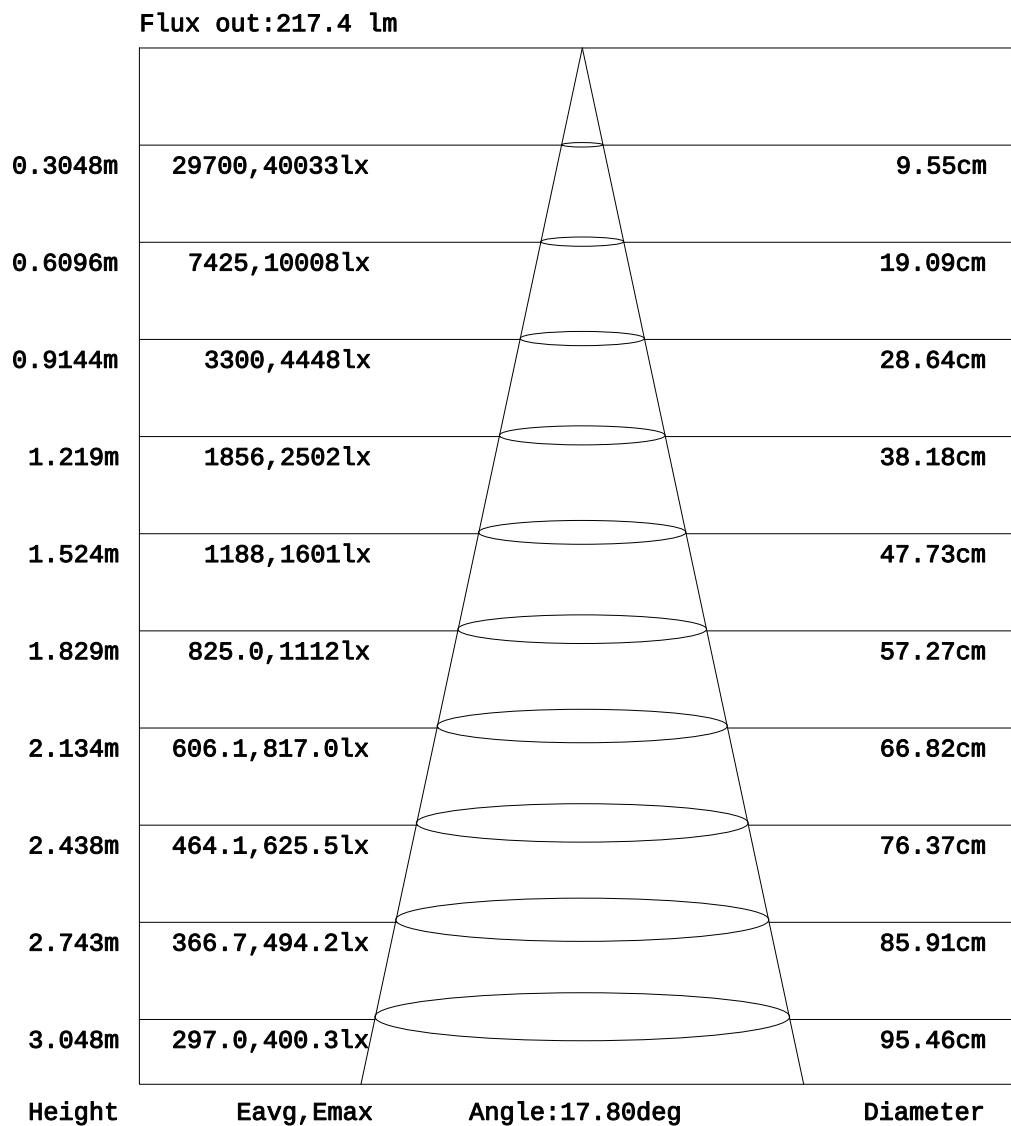


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

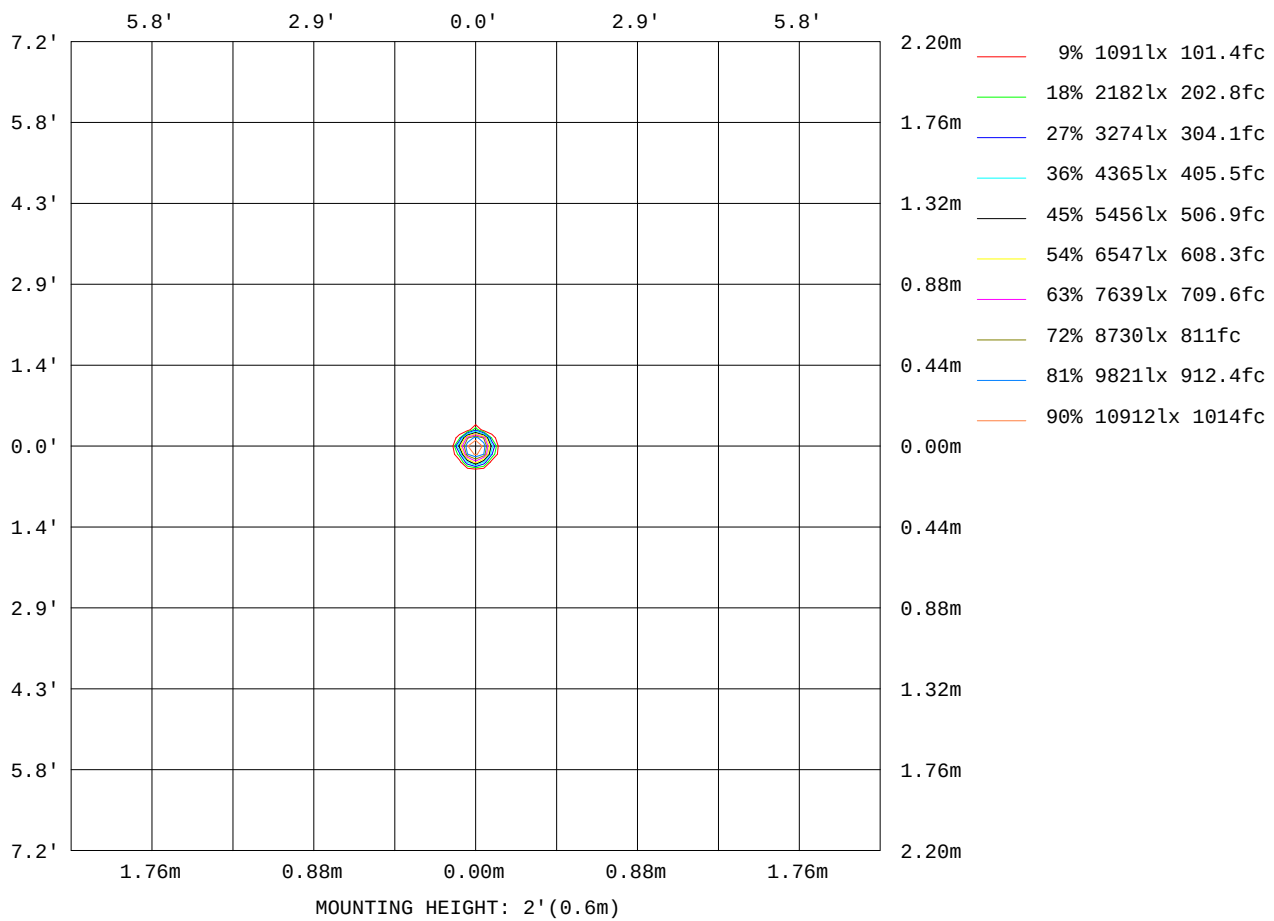

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.04V I:0.1462A P:30.160W PF:0.9373 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:260.244x1 Lm		
NAME: EP6MI-60ML-FF6BK(W)-MIN	TYPE: Fixed Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	68
L_0~180(75)av	83
L_0~180(85)av	70
L_90~270(65)av	69
L_90~270(75)av	85
L_90~270(85)av	73
L_45(65)av	68
L_45(75)av	83
L_45(85)av	62

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.487m [K=1.0000]
 Remarks:

Planar Illuminance Curve

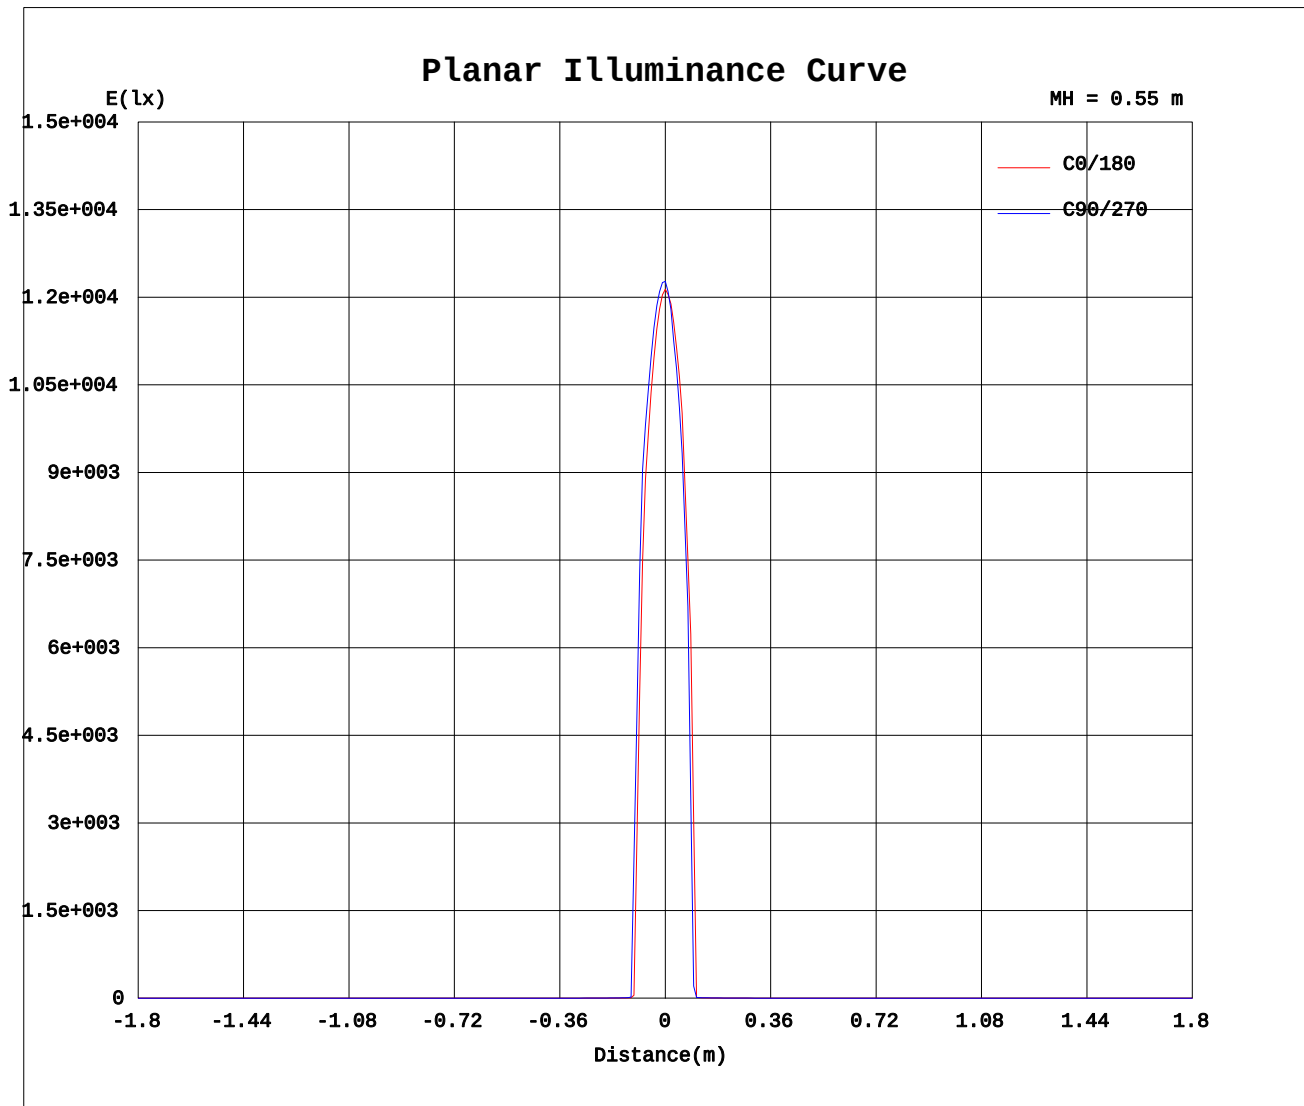

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.487m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702	3702			
5	3199	3249	3319	3372	3348	3316	3280	3239	3284	3222	3150	3106	3085	3111	3173	3234			
10	842	1102	1305	1461	1510	1472	1338	857	977	850	76.4	66.0	66.0	60.6	52.0	897			
15	2.28	2.44	2.72	2.95	3.11	3.07	2.76	2.68	2.65	2.50	2.42	2.70	2.78	2.47	2.33	2.29			
20	1.56	1.63	1.72	1.82	1.86	1.80	1.81	1.78	1.73	1.64	1.60	1.79	1.96	1.54	1.52	1.53			
25	1.24	1.24	1.28	1.34	1.38	1.28	1.34	1.35	1.30	1.25	1.22	1.36	1.44	1.18	1.18	1.18			
30	0.99	0.99	1.01	1.05	1.08	1.04	1.11	1.09	1.03	0.98	0.96	1.02	1.09	0.95	0.97	0.95			
35	0.67	0.67	0.70	0.74	0.76	0.73	0.73	0.79	0.71	0.67	0.65	0.69	0.72	0.68	0.66	0.65			
40	0.51	0.51	0.52	0.55	0.55	0.53	0.55	0.62	0.54	0.51	0.50	0.52	0.53	0.51	0.50	0.50			
45	0.41	0.41	0.41	0.44	0.45	0.43	0.44	0.50	0.43	0.41	0.40	0.42	0.42	0.41	0.40	0.40			
50	0.34	0.34	0.34	0.36	0.36	0.36	0.36	0.39	0.35	0.33	0.33	0.34	0.35	0.34	0.33	0.34			
55	0.29	0.29	0.28	0.30	0.30	0.30	0.30	0.32	0.29	0.28	0.27	0.28	0.29	0.28	0.28	0.28			
60	0.24	0.24	0.24	0.25	0.25	0.26	0.26	0.26	0.41	0.40	0.40	0.41	0.41	0.41	0.41	0.41			
65	0.20	0.20	0.20	0.20	0.21	0.23	0.21	0.21	0.37	0.37	0.36	0.37	0.37	0.37	0.37	0.37			
70	0.16	0.16	0.16	0.16	0.17	0.19	0.17	0.16	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.30			
75	0.12	0.12	0.12	0.12	0.13	0.15	0.13	0.12	0.31	0.30	0.30	0.31	0.31	0.31	0.30	0.30			
80	0.09	0.09	0.09	0.09	0.10	0.11	0.09	0.09	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28			
85	0.06	0.06	0.06	0.06	0.08	0.07	0.06	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
90	0.01	0.02	0.02	0.01	0.03	0.02	0.02	0.03	0.03	0.01	0.00	0.00	0.01	0.01	0.01	0.01			
95	0.01	0.01	0.00	0.00	0.01	0.01	0.03	0.05	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.01	0.01	0.01	0.01	0.01	0.02	0.05	0.09	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.02	0.01	0.01	0.01	0.02	0.03	0.09	0.13	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.03	0.02	0.02	0.02	0.02	0.05	0.15	0.19	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.03	0.02	0.02	0.03	0.03	0.08	0.24	0.27	0.21	0.14	0.13	0.05	0.00	0.01	0.02	0.02			
120	0.03	0.02	0.03	0.03	0.05	0.11	0.32	0.36	0.29	0.21	0.20	0.20	0.21	0.21	0.21	0.21			
125	0.02	0.02	0.02	0.03	0.06	0.13	0.38	0.40	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.02	0.01	0.02	0.03	0.07	0.14	0.43	0.41	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.01	0.01	0.01	0.03	0.08	0.15	0.42	0.37	0.12	0.03	0.01	0.00	0.00	0.00	0.00	0.00			
140	0.02	0.02	0.02	0.03	0.09	0.16	0.38	0.31	0.13	0.06	0.04	0.03	0.03	0.03	0.03	0.03			
145	0.10	0.09	0.09	0.11	0.15	0.23	0.38	0.31	0.22	0.19	0.17	0.15	0.15	0.15	0.15	0.14			
150	0.18	0.18	0.18	0.20	0.22	0.30	0.39	0.34	0.37	0.37	0.35	0.32	0.32	0.32	0.31	0.31			
155	0.18	0.18	0.19	0.20	0.22	0.27	0.32	0.29	0.49	0.49	0.48	0.44	0.43	0.43	0.42	0.42			
160	0.12	0.13	0.13	0.15	0.16	0.19	0.22	0.20	0.52	0.53	0.52	0.49	0.46	0.45	0.45	0.45			
165	0.10	0.10	0.11	0.12	0.13	0.15	0.17	0.17	0.51	0.51	0.50	0.47	0.43	0.42	0.41	0.41			
170	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.40	0.40	0.39	0.36	0.33	0.30	0.30	0.30			
175	0.07	0.07	0.09	0.10	0.10	0.11	0.12	0.12	0.22	0.23	0.21	0.18	0.14	0.14	0.14	0.14			
180	0.01	0.01	0.01	0.00	0.01	0.03	0.03	0.04	0.03	0.03	0.02	0.02	0.02	0.01	0.02	0.02			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2026-06-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.487m [K=1.0000]
 Remarks: