

VOLO - MODEL: OC1S

Linear Luminaires



WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing

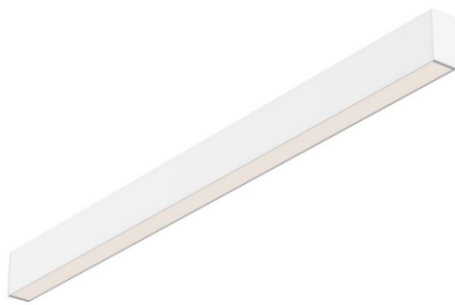

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

| Model | Length (mm) | Power (mm) | Driver | Beam | CCT | Finish |
|-------|----------------|---------------|-----------------|-----------|----------|----------|
| OC1S | 12 1200 | 30 30W | E ON-OFF | P (Matte) | 30 3000K | WT White |
| | | | D 0-10V Dimming | Y (Prism) | 35 3500K | BK Black |
| | | | A DALI | | 40 4000K | |
| | | | | | 50 5000K | |

Example: OC1S-1230E-Y40WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

VOLO - MODEL: OC1S

Linear Luminaires


WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing



Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

Order Model

| Model | Length (mm) | Power (mm) | Driver | Beam | CCT | Finish |
|-------|----------------|------------|-----------------|-------|----------|----------|
| OC1S | 12 1265 | 30 30W | E ON-OFF | 2 24° | 30 3000K | WT White |
| | | | D 0-10V Dimming | 3 36° | 35 3500K | BK Black |
| | | | A DALI | 4 45° | 40 4000K | |
| | | | | | 50 5000K | |

Example: OC1S-1230E-240WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED