

FUEGO COMPACT- MODEL: AEIR7TF

WAC ARCHITECTURAL

In-ground Luminaires


Project Name:

Type:

Product Image



Line Drawing

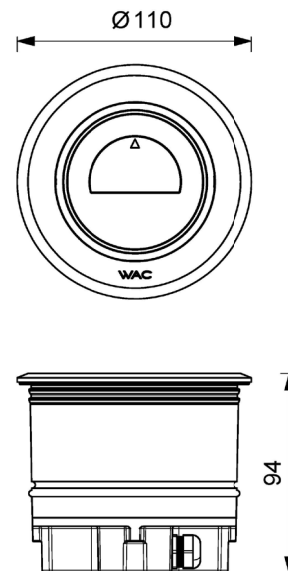

Product Description

FUEGO Compact adopts high quality 316 stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP68 protection, IK10 anti-impact rating, anti-pressure 2000kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- **Body Material** : Aluminum alloy die-casting + Stainless steel frame
- **Optical System** : Lens
- **Finish** : Static electricity powder coating
- **Adjustable Angle**: /
- **Accessories** : /
- **Certification** : CCC
- **IP Rating** : IK10, IP68 (Not suitable for permanent under water installation)
- **Insulation** : Class I
- **Operating Temperature** : -20°C~50°C

Product Specifications

- **LED Typ** : COB
- **LED Power** : 8.5W Max
- **Source Lm** : 3000K 660lm
- **LED Lifetime** : >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI** : 2700K , 3000K , 4000K , Ra90
- **SDCM** : 3 SDCM
- **Input** : 220V AC/50Hz
- **Dimming** : ON-OFF
- **Net Weight** : 0.8Kg , without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR7T	F Fixed	08 8.5W	3	407	EL ON-OFF 220V AC Power Supply	W WALL WASHER	27 2700K 30 3000K 40 4000K	SS Stainless Steel

Example: AEIR7TF-08ELW27SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

FUEGO COMPACT- MODEL: AEIR7TF

In-ground Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Accessory

Item	Description	Pic	Description Dimensions
AEIR5TF-RC001	Recessed Casing		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

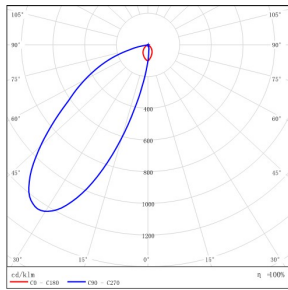

MODEL : AEIR7TF-08ELW30SS

BEAM ANGLE : WALL WASHER

POWER : 10W

LUMENS: 407 lm

CBCP : /

EFFICACY : 41.1 lm /W