

# INVISILED PIXELS - MODEL: ALED-P

## Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

### Product Image



### Line Drawing

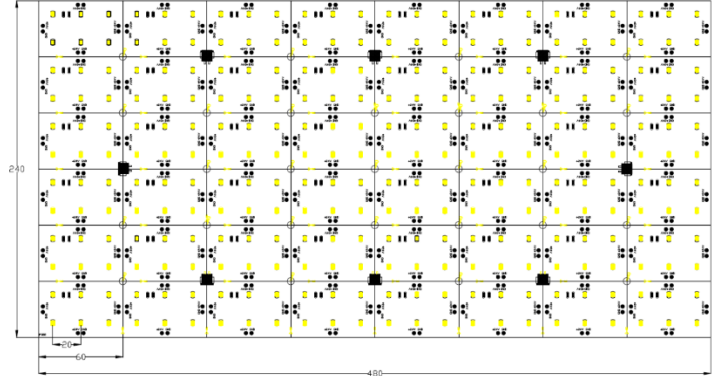

### Product Description

Designed for luminous ceiling and luminous wall design, InvisiLED Pixels supports single group cutting, easy installation, can be cut along the design grid to create creative modeling. Suitable for hotel villas, commercial space and other places.

### Product Features

- **Body Material:** Flexible copper FPCB board
- **IP Rating:** IP20
- **Operating Temperature:** -20°C~50°C

### Product Specifications

- **Light source:** SMD
- **Light source power:** Max 45W/pcs (Customizable low power)
- **Size:** 240mm\*480mm
- **Minimum clipping unit:** 20mm\*60mm
- **LED Lifetime:** >36000h-L70 / B10-Ta25°C (LM-80/TM-21)
- **CCT:** 2700K/3000K/4000K Ra90
- **Input:** 24V DC
- **Dimming:** Full plate control, need to be equipped with 0-10V, DMX512, DALI dimmer modules
- **Net Weight:** Approx. 0.3Kg/pcs, without packaging

### Order Model

Model	LED	Size	CRI	CCT	Series
ALED-P	45 45W/pcs	2448	9 Ra 90	27 2700K	G Series
InvisiLED Pixels		240mm*480mm		30 3000K	
				40 4000K	

Example: ALED-P45-2448-927G

\*Please consult WAC for product specifications and customization requirements