

CUBE

6" Wall Mount

DC-WS06 | DC-WS0622

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____



LINE DRAWING

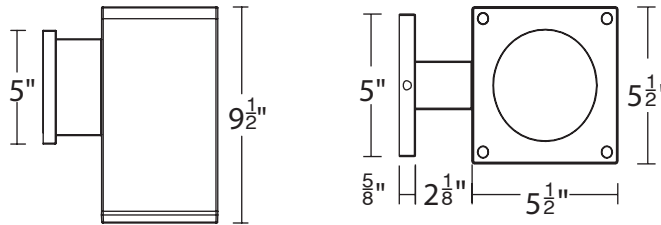

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Mounting:	Wall mounted
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 60,000 hours at L70
Input:	Universal 120-277V AC 50/60 Hz
Dimming:	Electronic low voltage (ELV) : 100 - 5% 0-10V: 100 - 1%
Maximum Delivered Intensity:	Up to 13062 cd (Spot 16°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 2470 lm (Flood 33°, 4000K, CRI 85)
Operating Temperature:	-13°F to 122°F (-25°C to 50°C)
Standards:	IP65 rated, ETL & cETL wet location listed Energy Star® 2.2 rated, Title 24 JA8-2016 Compliant
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Beam Angle	Color Temp	CRI	Reference Lumens	Output ¹ CBCP	Efficacy (Lm/W)	Light Direction	
S Spot 16°	927	2700K	90	2820	18842	81	
	827	2700K	85	3385	22608	97	
	930	3000K	90	2925	19543	84	
	830	3000K	85	3535	23632	101	
	835	3500K	85	3630	24255	104	
840	4000K	85	3665	24490	105	S Straight 	
N Narrow 28°	927	2700K	90	2800	7992		80
	827	2700K	85	3360	9589		96
	930	3000K	90	2900	8290		83
	830	3000K	85	3510	10024		100
	835	3500K	85	3600	10288	103	
840	4000K	85	3635	10388	104	A Away 	
F Flood 38°	927	2700K	90	2825	5451	81	
	827	2700K	85	3390	6540	97	
	930	3000K	90	2930	5654	84	
	830	3000K	85	3545	6836	101	
	835	3500K	85	3640	7017	104	
840	4000K	85	3675	7085	105	B Towards 	

Reference output shows 35W output aimed straight up or down. Multiply by 0.7 to determine output for 22W combinations.

CUBE

6" Wall Mount

DC-WS06 | DC-WS0622

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
DC-WS06 (35W) DC-WS0622 (22W)	S - 16°	827 - 2700K - 85	S - Straight	BK - BLACK
	N - 28°	830 - 3000K - 85	A - Away	BZ - BRONZE
	F - 38°	835 - 3500K - 85	B - Towards	GH - GRAPHITE
		840 - 4000K - 85		WT - WHITE
		927 - 2700K - 90		
		930 - 3000K - 90		

DC-WS06-_____ - ____

Example: DC-WS06-N927S-BK

ORDERING NOTES

- 16° and 28° can only be ordered with the Light Direction "S-Straight".
- 38° beam fixtures can be ordered with the Light Directions "S-Straight", "A-Away", and "B-Towards".

CUBE

6" Wall Mount

DC-WS06 | DC-WS0622

Fixture Type: _____

Project: _____

Catalog#: _____


Location: _____

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a 35W fixture set to 3000K and 90 CRI.


Spot Beam: 16° Beam

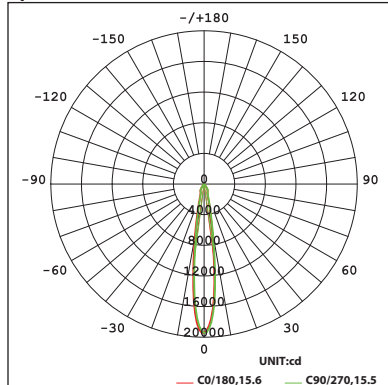

Narrow Flood Beam: 28° Beam

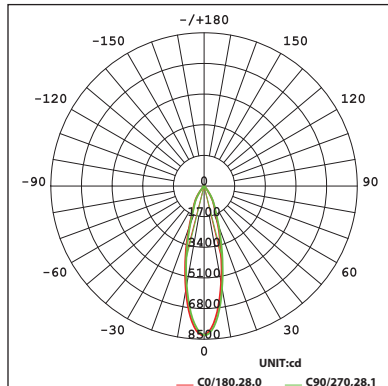

Flood Beam: 38° Beam

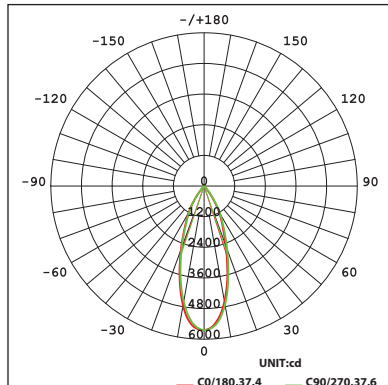

Unified Glare Rating (UGR) Table

UGR values shown are calculated for the Spot Beam (16°) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	5.1	5.8	5.3	6.0	6.2	4.7	5.4	4.9	5.6	5.8	
3H	5.4	6.1	5.6	6.3	6.5	5.1	5.7	5.3	5.9	6.1	
4H	5.6	6.2	5.9	6.5	6.7	5.3	5.9	5.6	6.2	6.4	
6H	5.8	6.4	6.1	6.7	6.9	5.5	6.1	5.8	6.4	6.6	
8H	5.9	6.5	6.2	6.7	7.0	5.5	6.1	5.8	6.4	6.7	
12H	6.0	6.5	6.3	6.8	7.1	5.6	6.1	5.9	6.4	6.7	
4H	2H	5.1	5.7	5.4	6.0	6.2	4.7	5.4	5.0	5.6	5.8
	3H	5.5	6.1	5.8	6.4	6.7	5.2	5.8	5.5	6.1	6.4
	4H	5.8	6.4	6.2	6.7	7.0	5.6	6.1	5.9	6.4	6.7
	6H	6.2	6.7	6.6	7.0	7.3	5.9	6.4	6.3	6.7	7.1
	8H	6.3	6.8	6.7	7.1	7.5	6.0	6.5	6.4	6.8	7.2
	12H	6.5	6.9	6.9	7.3	7.7	6.1	6.5	6.5	6.9	7.3
8H	4H	5.9	6.4	6.3	6.7	7.1	5.7	6.1	6.1	6.5	6.9
	6H	6.4	6.8	6.8	7.2	7.6	6.2	6.5	6.6	6.9	7.4
	8H	6.6	7.0	7.1	7.4	7.8	6.4	6.7	6.8	7.1	7.6
	12H	6.9	7.2	7.4	7.6	8.1	6.5	6.8	7.0	7.3	7.7
12H	4H	5.9	6.3	6.3	6.7	7.1	5.7	6.1	6.1	6.5	6.9
	6H	6.4	6.7	6.9	7.2	7.6	6.2	6.5	6.7	7.0	7.4
	8H	6.7	7.0	7.2	7.4	7.9	6.5	6.7	6.9	7.2	7.7

Beam	Angle	UGR Range
Spot	16°	≤ 8
Narrow Flood	28°	≤ 8
Flood	38°	≤ 9