


Volta

Tunable White - 4.5" Trim Housings


R4RNT | R4SNT | R4BRT

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

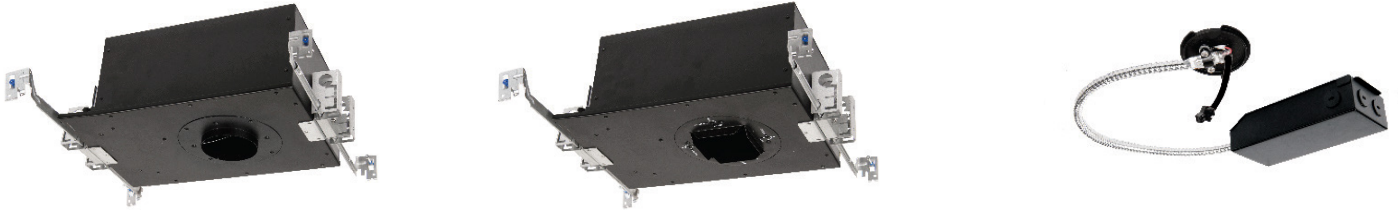


LINE DRAWING


Round

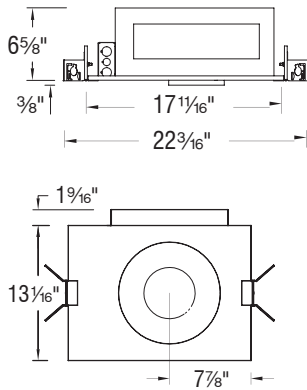

Square

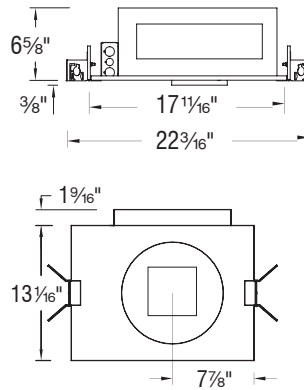

Remodel

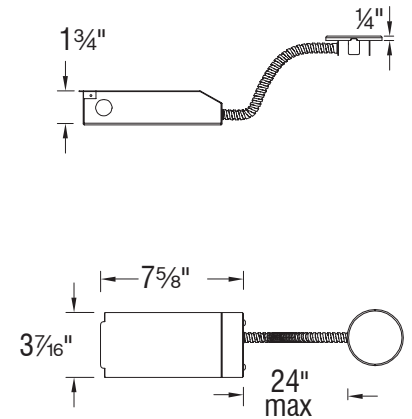

PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

TRIM STYLES



Round: R



Square: S

SPECIFICATIONS

- Mounting:** Universal mounting brackets and hanger bars
 Ceiling cut out (Round): $\varnothing 5\frac{1}{8}"$
 Ceiling cut out (Square): $5\frac{1}{8}" \times 5\frac{1}{8}"$
 Accommodates 1/2" - 1 1/2" ceiling thickness
- Input:** Universal 120-277V AC, 50/60 Hz
- Dimming:** 2 Channel 0-10V: 100-0.1%
 2 Channel DMX512-A with RDM: 100-0.1%
- Emergency:** EM fixtures provided with integral Emergency battery back up with 24" lead wire remote test switch. Provides at least 90 minutes of 8W illumination during emergency operation
- Standards:** ETL & cETL, Chicago Plenum, IC-rated, Airtight (see list)
- Warranty:** 5 year WAC Lighting guaranteed warranty

Volta

Tunable White - 4.5" Trim Housings

R4RNT | R4SNT | R4BRT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

HOUSINGS (Required)						
	Model	Trim	Power	Rating	Driver	
New Construction Airtight	R4RN (Round) R4SN (Square)	T Trim	15	20W	IC	T-X DMX512-A T-Z 2CH 0-10V
			25	29W	IC	
			36	44W	Non-IC	
Remodel Round or Square	R4BR	T Trim	15	20W	Non-IC	T-X DMX512-A T-Z 2CH 0-10V
			25	29W	Non-IC	
			36	44W	Non-IC	

Field Replaceable Driver (New Construction Only)	
D-R4N-15T-X	DMX512-A Driver for 20W
D-R4N-25T-X	DMX512-A Driver for 29W
D-R4N-36T-X	DMX512-A Driver for 44W
D-R4N-15T-Z	2CH 0-10V Driver for 20W
D-R4N-25T-Z	2CH 0-10V Driver for 29W
D-R4N-36T-Z	2CH 0-10V Driver for 44W

INSTALLATION

Trim Model	Trim Description	Ceiling Thickness		
		1/2"	1"	1 1/2"
R4RD2T R4SD2T	Downlight	Yes	Yes	Yes
R4RD1T R4SD1T	Shallow Regressed Downlight	Yes	Yes	Yes
R4RAT R4SAT	Adjustable	Yes, to 45°	Yes, to 45°	Yes, to 35°
R4RWT R4SWT	Wall Wash	Yes	Yes	No