
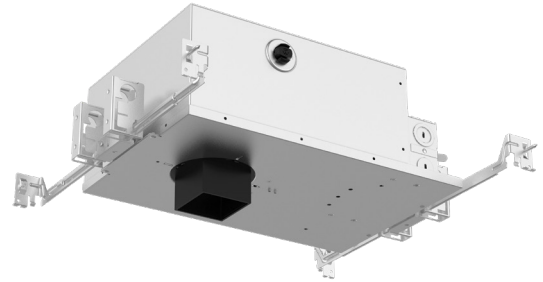


## FQ Tunable White

### 2" Millwork New Construction Housing

R2FRNM-A,B-TWX | R2FRNM-A,B-TWZ | R2FSNM-A,B-TWX | R2FSNM-A,B-TWZ

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

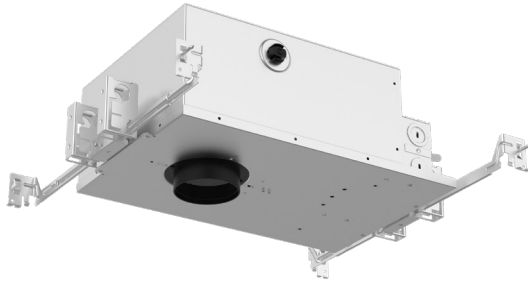

#### LINE DRAWING

<p>R2FRNM-A A: 0.8" Collar Depth</p>	<p>R2FSNM-A A: 0.8" Collar Depth</p>
<p>R2FRNM-B B: 1.5" Collar Depth</p>	<p>R2FSNM-B B: 1.5" Collar Depth</p>

#### PRODUCT DESCRIPTION

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The FQ series features superlative glare control with 30° shielding, 35° vertical tilting, and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

#### SPECIFICATIONS

<b>Mounting:</b>	New construction housings include universal mounting brackets and hanger bars Ceiling cut out (Round): $\varnothing 3\frac{1}{8}"$ Ceiling cut out (Square): $2\frac{9}{16}" \times 2\frac{9}{16}"$ Accommodates $\frac{1}{2}" - 1"$ ceiling thickness
<b>Input:</b>	Universal 120-277V AC, 50/60 Hz
<b>Dimming:</b>	DMX512-A, 0-10V
<b>Standards:</b>	ETL & cETL, IC-rated, Airtight
<b>Warranty:</b>	5 year WAC Lighting guaranteed warranty

## FQ Tunable White

### 2" Millwork New Construction Housing

R2FRNM-A,B-TWX | R2FRNM-A,B-TWZ | R2FSNM-A,B-TWX | R2FSNM-A,B-TWZ

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### ORDERING INFORMATION

HOUSINGS					
	Model	Size	Control	Power	Rating
New Construction Round	R2FRNM	A 0.8"	TWX DMX512-A	1 14W	IC
		B 1.5"	TWZ 0-10V	2 18W	IC
New Construction Square	R2FSNM	A 0.8"	TWX DMX512-A	1 14W	IC
		B 1.5"	TWZ 0-10V	2 18W	IC

R2F \_ \_ \_ \_

Example: R2FRNM-A-TWX-2

Housing Model	Power	Replacement Driver Model
R2FRNM-TWX	1 14W	D-A1RS-21-C2
R2FSNM-TWX	2 18W	D-A1RS-22-C2
R2FRNM-TWZ	1 14W	D-R2FN-TWZ-1
R2FSNM-TWZ	2 18W	D-R2FN-TWZ-2

FQ Tunable White  
2" Millwork New Construction Housing

R2FRNM-A,B-TWX | R2FRNM-A,B-TWZ | R2FSNM-A,B-TWX | R2FSNM-A,B-TWZ

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

**MILLWORK HOUSING APPLICATION TABLE**

Millwork Housing	Trim Model	Trim Description	Ceiling Thickness				
			1/4"	1/2"	3/4"	1"	1 1/2"
<b>R2FRNM-A Round</b>	R2FRDL	Downlight	Yes	Yes	Yes	N.A.	
	R2FRPL	Pinhole	Yes	Yes	Yes		
	R2FRAL	Adjustable	Yes, to 35°	Yes, to 35°	Yes, to 35°		
	R2FRWL	Wall Wash	Yes	Yes	Yes		
<b>R2FRNM-B Round</b>	R2FRDL	Downlight	N.A.		Yes	Yes	Yes
	R2FRPL	Pinhole			Yes	Yes	Yes
	R2FRAL	Adjustable			Yes, to 12°	Yes, to 12°	Yes, to 12°
	R2FRWL	Wall Wash			Yes	Yes	Yes
<b>R2FSNM-A Square</b>	R2FSDL	Downlight	Yes	Yes	Yes	N.A.	
	R2FSPL	Pinhole	Yes	Yes	Yes		
	R2FSAL	Adjustable	Yes, to 25°	Yes, to 25°	Yes, to 25°		
	R2FSWL	Wall Wash	Yes	Yes	Yes		
<b>R2FSNM-B Square</b>	R2FSDL	Downlight	N.A.		Yes	Yes	Yes
	R2FSPL	Pinhole			Yes	Yes	Yes
	R2FSAL	Adjustable			Yes, to 8°	Yes, to 8°	Yes, to 8°
	R2FSWL	Wall Wash			Yes	Yes	Yes